

Quick Disconnect



-24

880-003R Front Panel Mount Receptacle with Pigtail Wires

Series 880 Quick-Disconnect (QDC) front panel mount receptacles are pre-wired and sealed with epoxy. Integral shield termination platform. Three contact sizes are available with current ratings of 5A, 3A and 1A. Aluminum or stainless steel housings and thermoplastic insulators. High-strength wire with crosslinked ETFE



insulation crimped at factory to high performance contacts. Ultraminiature SuperFly® connectors are ideal for soldier systems and other applications where reduced size and weight are critical. **Shell Size and Insert Arrangements Sample Part Number** 880-003R **-B7N** 004 880-003R Series A = Unshrouded Contacts **B** = Shrouded Contacts **Insert Style** Shrouded contacts are recessed within the insulator **Shell Size/** See Shell Size and Insert Arrangement Table **Insert Arr.1** M = Aluminum/electroless nickel RoHS compliant **ZR** = Aluminum/zinc-nickel, non-reflective with Material/ RoHS compliant black chromate MT = Aluminum/nickel-PTFE RoHS compliant **ZMT** = Stainless steel/nickel-PTFE RoHS compliant

Wire AWG

Wire Type

Wire Color

Wire Length

Insert	No. of Contacts				
Arrangements	#23 5A.	Micro 3A.	Nano 1A.		
B7N	_	_	7		
C10N	_	_	10		
C2M2N	_	2	2		
D3M	_	3	_		
D2W2N	2	_	2		
E3W	3	_	_		
E4M	_	4	_		
E19N	_	_	19		
E4M4N	_	4	4		
F4W	4	_	_		
F7M	_	7	_		
F22N	_	_	22		
F4M8N	_	4	8		
F4W4N	4	_	4		
G7W	7	_	_		
G10M	_	10	_		
G31N	_	_	31		
G6M10N	_	6	10		
G6M12N	_	6	12		
H10W	10	_	_		
H37N	_	_	37		
H6W14N	6	_	14		
J44N	_	_	44		
J7W19N	7	_	19		
K19M	_	19	_		
K13M19N	_	13	19		
L22M	_	22	_		

First letter of insert arrangement represents connector shell size, as in this example: K13M19N

NOTES

- 1. See Section A for insert arrangement layouts
- 2. See Section A for additional finish options

MOD-686 POLARIZING OPTIONS

1 = White

See Wire Code Table


Standard SuperFly® connectors have a single master key. Versions with three keys are also available if alternate key positions are required. Add suffix code 686 to the part number per the following example: 880-003RA-B7N-M004J1-24-686A

Overall length ('L') in inches measured from front of connector

J = "Space Grade" wire M22759/33 or equivalent (ETFE)

5 = Full Color; 1-10 solid color, 11 and up are striped 7 = 10 Color Repeating; (Wire #1 black, Wire #11 black, etc)

Plug Alternate Key Positions					
Suffix Code	Α°	В°			
686A	150°	210°			
686B	75°	210°			
686C	95°	230°			
686D	140°	275°			
686E	75°	275°			
686F	95°	210°			



MOD-518 OPEN FACE SEALING

For IP67 performance in open face (unmated) condition, use suffix -518. Example: 880-003RA-B7N-M004J1-24-518

SERIES 880



Quick Disconnect





880-003R Front Panel Mount Receptacle with Pigtail Wires

ABOUT SHROUDED AND UNSHROUDED SUPERFLY® CONFIGURATIONS

Shrouded contacts are recessed within the insert. Unshrouded contacts extend from the insert face. Shrouded inserts contain 1 amp and 3 amp Twistpin contacts along with 5 amp socket contacts. Unshrouded inserts contain 1 amp and 3 amp sockets and 5 amp pin.

Wire Code Table							
Layouts with 5A.							
Insert	#23	Micro	Nano				
Arrangement	5A.	3A.	1A.	Code			
	#22	_	_	100			
E3W, F4W,	#24	_	_	200			
G7W, H10W	#26	_		300			
Layouts with 5A.	Layouts with 5A. and 1A. Contacts						
Insert	#23	Micro	Nano				
Arrangement	5A.	3A.	1A.	Code			
	#22	_	#28	104			
	#24	_	#28	204			
	#26	_	#28	304			
D2W2N, F4W4N,	#22	_	#30	105			
H6W14N,	#24	_	#30	205			
J7W19N	#26	_	#30	305			
	#22	_	#32	106			
	#24	_	#32	206			
	#26	_	#32	306			
Layouts with 3A.		cts					
Insert	#23	Micro	Nano				
Arrangement	5A.	3A.	1A.	Code			
	_	#24	_	020			
D3M, E4M F7M,	_	#26	_	030			
G10M, K19M, L22M	_	#28	_	040			
LZZIVI	_	#30	_	050			
Layouts with 3A.	and 1	A. Conta	icts				
Insert	#23	Micro	Nano	Cada			
Arrangement	5A.	3A.	1A.	Code			
	_	#24	#28	024			
	_	#26	#28	034			
C2M2N,	_	#28	#28	044			
E4M4N, F4M8N	_	#24	#30	025			
G6M10N,	_	#26	#30	035			
G6M12N,	_	#28	#30	045			
K13M19N	_	#24	#32	026			
	_	#26	#32	036			
	_	#28	#32	046			
Layouts with 1A.	Conta						
Insert Arrangement	#23 5A.	Micro 3A.	Nano 1A.	Code			
B7N, C10N,	_	_	#28	004			
E19N, F22N,	_	_	#30	005			
G31N, H37N, J44N	_	_	#32	006			

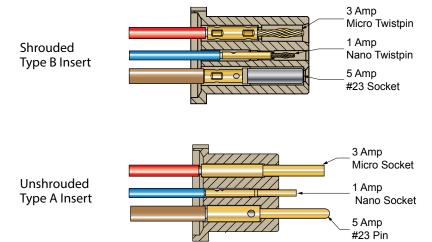

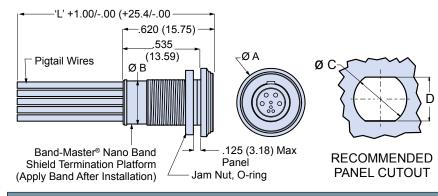

Dimensions									
Shell Size	A Ma	A Max OD		B Rear OD		C Mount Dia		D Flats	
	ln.	mm.	ln.	mm.	ln.	mm.	ln.	mm.	
В	.392	9.96	.214	5.44	.283	7.19	.241	6.12	
C	.412	10.46	.239	6.07	.305	7.75	.261	6.63	
D	.432	10.97	.252	6.40	.324	8.23	.281	7.14	
Е	.451	11.46	.278	7.06	.344	8.74	.300	7.62	
F	.471	11.96	.297	7.54	.364	9.25	.320	8.13	
G	.490	12.45	.319	8.10	.383	9.73	.340	8.64	
Н	.530	13.46	.356	9.04	.419	10.64	.379	9.63	
J	.569	14.45	.384	9.75	.459	11.66	.418	10.62	
K	.589	14.96	.406	10.31	.478	12.14	.438	11.13	
L	.628	15.95	.445	11.30	.518	13.16	.478	12.14	