

S9407-AB-HBK-010

# Conduit Systems for Shipboard Electromagnetic Shielding




## RP2340 Adapter to MIL-C-26482 connectors

### ADAPTER TO M26482 CONNECTOR IAW S9407-AB-HBK-010 REV 2, RP2340




How To Order					
<b>Sample Part Number</b>	RP2340	-15	-08	-03	SM
<b>Basic Part Number</b>	Adapter to M26482 connector				
<b>A Thread Code</b>	07, 09, 11, 13, 15, 17, 19, 21, 23 see sales drawing for details				
<b>Conduit Size Code</b>	02, 03, 04, 05, 06, 08, 10, 12, 16, 20, 24				
<b>Style Code</b>	-01, 02, 03, see sales drawing for details				
<b>Material / Finish</b>	SN = mild steel with cadmium over electroless nickel finish SM = mild steel with electroless nickel finish IAW AMS 2404C (SM supersedes "no suffix" code reserved for legacy parts)				

RP2000

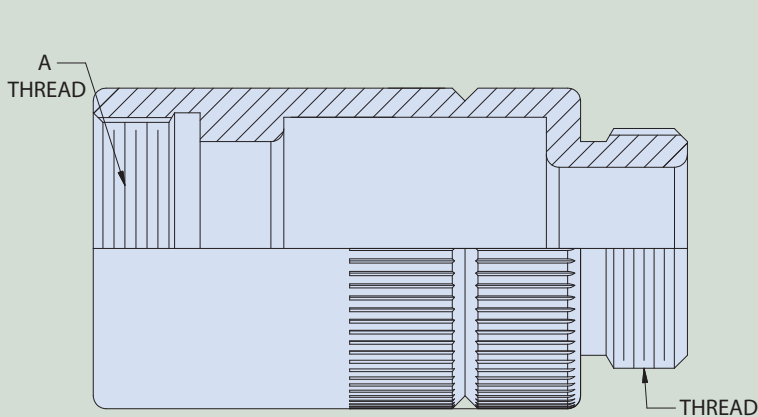

STYLE 01 & 02

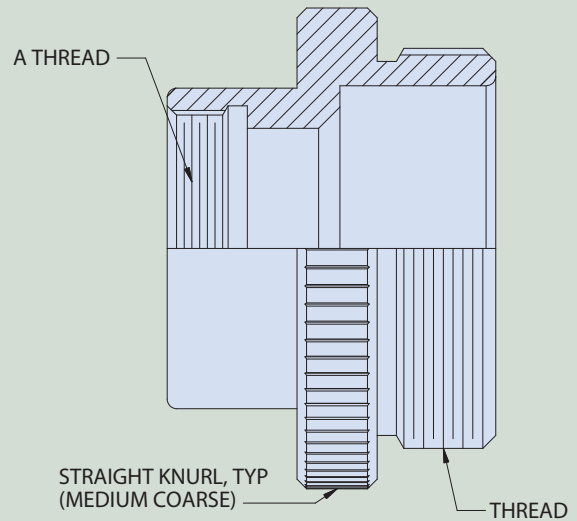

STYLE 03

#### MATERIAL / FINISH

Mild Steel AISI Type B1113 IAW Fed-STD-66

#### NOTES

Style 01 - use when "E" diameter is greater than "K" diameter.

Style 02 - same as Style 01 except "J" dimension is zero.

Style 03 - use when "E" diameter is equal to or less than "K" diameter.

For MIL-C-26482 Series 2 the RP2350 adapter may be used