121-192
Annular Polymer-Core Convoluted Tubing
with Double External Braid

Tubing plus a double layer of high dB EMI/RFI shielding

How To Order

Product Series	Dash No. (Table I)		Inner Braid Option (Table III)			Unit Length (In inches, Omit for bulk length)
121	- 192	- 16	Y	T	T	- 42
	Basic No.		Tubing Option (Table II)		Outer Braid Option (Table III)	

Table I - Dash Number/Diameter

Dash No	A Inside Dia		B Outside Dia
	Min	Max	Max
06	.17 (4.3)	.19 (4.8)	.44 (11.1)
09	.24 (6.1)	.28 (7.1)	.54 (13.7)
12	.33 (8.4)	.37 (9.4)	.64 (16.2)
14	.40 (10.1)	.44 (11.2)	.71 (18.0)
16	.45 (11.4)	.50 (12.7)	.78 (19.8)
20	.57 (14.5)	.62 (15.7)	.89 (22.6)
24	.69 (17.5)	.75 (19.1)	1.06 (26.9)
28	.81 (20.6)	.87 (22.1)	1.20 (30.5)
32	.93 (23.6)	1.00 (25.4)	1.32 (33.5)
40	1.18 (30.0)	1.25 (31.8)	1.56 (39.6)
48	1.43 (36.3)	1.50 (38.1)	1.83 (46.5)
52	1.56 (39.6)	1.63 (41.4)	1.97 (50.0)

Table II - Tubing Option

Y	Kynar/Thermally stabilized
V	PVDF/Not thermally stabilized
S	G-FLEX Siltem/Medium duty - natural color only

Table III - Shield/Braid Option

T	Tin/Copper
C	Stainless Steel
N	Nickel Copper
L	ArmorLite™
D	Dacron
M	Nomex
E	AmberStrand® 100%
F	AmberStrand® 75%/25%

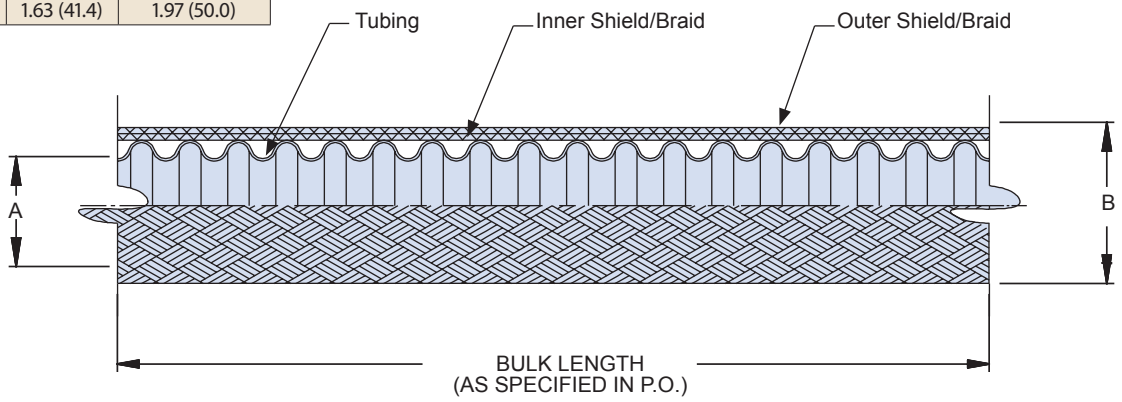

Standard Shipping Package

Dash No.	Max Length Per Pkg.
09& 12	200 ft (60m)
16 – 52	100 ft (30m)

Packaging

Long-length orders of 121-192 braided conduit are subject to carrier weight and box size restrictions. For example, UPS air shipments are currently limited to 50 lbs. per box. Unless otherwise specified, Glenair standard practice is to ship optimal lengths of product based on weight, size, and individual carrier specifications. Consult factory for additional information or to specify packaging requirements.

© 2012 Glenair, Inc.