


792-004P Panel Receptacle Connectors

Crimp Removable, Rear Release Contacts

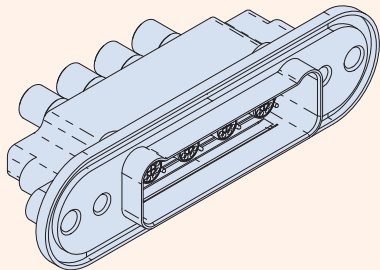

Size 8 quadrx or Ochito contacts. Blind mate. Panel mount with O-ring. Series 792 connectors are intended for 10Gb Ethernet, USB 3.0 and other multi-gigabit protocols. Machined aluminum shell with polarizing lobes. Crimp removable size 8 contacts are purchased separately. "Combo" arrangements are supplied with unassembled size 23 crimp contacts. Military-grade performance and construction.

Technical Data	
Specifications	
<ul style="list-style-type: none"> Operating temperature: -65° to +150°C Current rating, size 23 contact: 5A Voltage rating (DWV): 750 Vac, size 23 1800 Vac size 8 body to connector shell Wire size, #23 contact: AWG 22-28 Shock: EIA-364-27 condition D Vibration: EIA-364-28 condition V, letter E Insulation Resistance: 5000 MΩ min. Altitude immersion: 75,000 feet 	
Construction	
<ul style="list-style-type: none"> Shell: aluminum alloy Metal insert: aluminum, nickel plated Insulators: high-grade rigid dielectric Interfacial seal: fluorosilicone blend O-ring: code F fluorosilicone, code C silver plated aluminum-filled fluorosilicone, code S gold plated copper alloy Contacts: copper alloy, 50 microinches gold over nickel plating Wire grommet: fluorosilicone blend Contact retention clip, insert retention clip: copper alloy EMI Spring: copper alloy, nickel plated Hardware: 300 series SST, passivated 	

How To Order						
	Sample P/N → 792-004P	A-1W1	ZR	E	P	C
Product	792-004P = Panel Receptacle, Pin Contacts					
Insert Arrangement	See Table 2					
Shell Finish	M = Electroless Nickel MT = Nickel-PTFE					
EMI Spring	E = EMI spring N = No EMI spring					
Mating Hardware (Table 1)	N = No hardware P = Jackpost B = Female guide bushing					
O-ring Option	N = No O-ring F = Fluorosilicone O-ring (non-conductive) C = Conductive fluorosilicone O-ring S = Metal EMI panel spring (non-environmental)					

Table 1 Mating Hardware		
<p>N No Hardware Blind tapped holes</p>	<p>P Jackposts 8-32 UNC-2B thread</p>	<p>B Guide Bushings Non-removable</p>

Table 2 Insert Arrangements					
Insert arrangement	Number of Contacts		Insert arrangement	Number of Contacts	
	#23	#8		#23	#8
A-1W1, A-1G1*		1	D-27W3	24	3
A-3W1	2	1	D-4W4, D-4G4*		4
B-23W1	22	1	D-12W4	8	4
B-2W2, B-2G2*		2	E-45W3	42	3
B-6W2	4	2	E-5W5, E-5G5*		5
C-24W2	22	2	E-15W5	10	5
C-3W3, C-3G3*		3	F-9W9, F-9G9*		9
C-9W3	6	3	F-31W9	22	9

Cavity identification numbers shown are for mating face of plug connectors with socket contacts.
 * Insert arrangements with "G" designator are grounded type with metal insert. Insert arrangements with "W" designator have thermoplastic dielectric.

SERIES 792

High-Speed Ultraminiature Rectangular Connectors




792-004P Panel Receptacle Connectors

Crimp Removable, Rear Release Contacts


Insertion/Removal Tools	
Insertion/Removal Tool for Size 23 Contact	Removal Tool for Size 8 Contacts
809-088 	859-049 (M81969/14-12)

Size 23 Pin Contacts		
Contact Part No.	Crimper	Positioner
850-163 	809-015 (M22520/2-01) 	859-214 (DMC# K2104)

Polarizing Key Location and Contact Identification

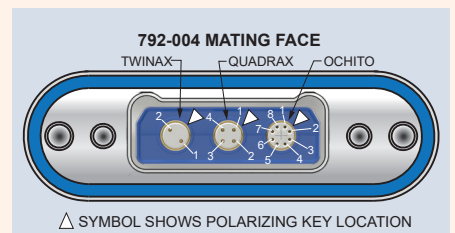


Series 792 connectors have a polarizing keyway in size 8 contact cavities. This keyway orients and aligns twinax, quadrax and El Ochito® contacts. The connector keyway is rotated 45° from top dead center. This illustration shows the location of the polarizing key and the contact numbers when looking at the mating face of the plug (socket) connector.

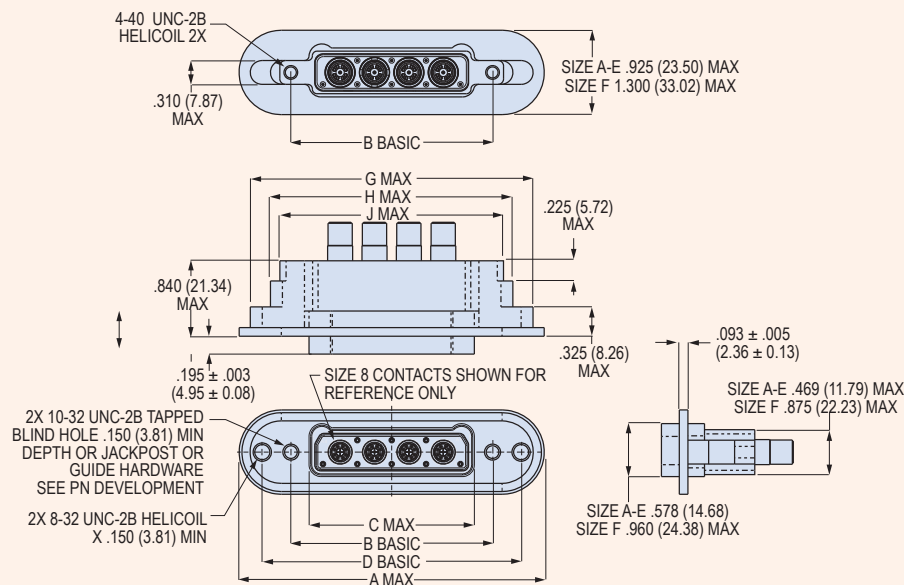

Size 8 Datalink Pin Contacts (not supplied with Connector)

 Differential Twinax 853-076	 Quadrax 854-047
 El Ochito Type I 10Gb Ethernet (White) 858-045 USB 3.0 (Blue) 858-047 HDMI, DisplayPort, SATA (Red) 858-049	
 El Ochito Type II 10Gb Ethernet (White) 858-043	

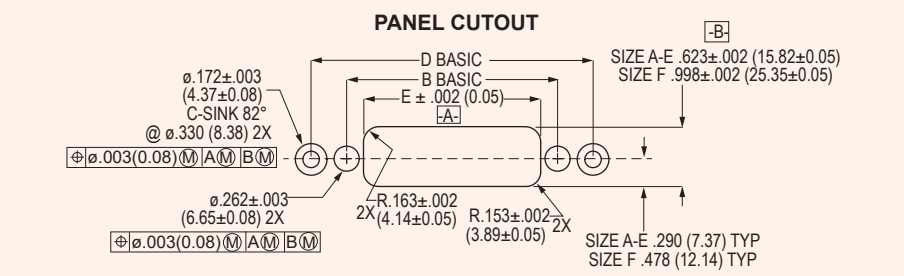

792-004P Dimensions

Shell Size	A Max		B Basic		C Max		D Basic		E ± .002 (0.06)		G Max		H Max		J Max	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
A	2.220	56.39	1.075	27.31	.690	17.53	1.699	43.15	.725	18.42	1.965	49.91	1.525	38.74	1.320	33.53
B	2.595	65.91	1.450	36.83	1.065	27.05	2.074	52.68	1.100	27.94	2.340	59.44	1.900	48.26	1.695	43.05
C	2.970	75.44	1.825	46.36	1.440	36.58	2.449	62.20	1.475	37.47	2.715	69.96	2.275	57.79	2.070	52.58
D	3.345	84.96	2.200	55.88	1.815	46.10	2.824	71.73	1.850	46.99	3.090	74.49	2.650	67.31	2.445	62.10
E	3.720	94.49	2.575	65.41	2.190	55.63	3.199	81.55	2.225	56.52	3.465	88.01	3.025	76.84	2.820	71.63
F	3.720	94.49	2.575	65.41	2.190	55.63	3.199	81.55	2.225	56.52	3.465	88.01	3.025	76.84	2.820	71.63