

Moistureproof Data Cable Hummer Adapters RFI/EMI, Shield Termination, Shrink Boot, Composite Material, For Series 74 Conduit - 710S607

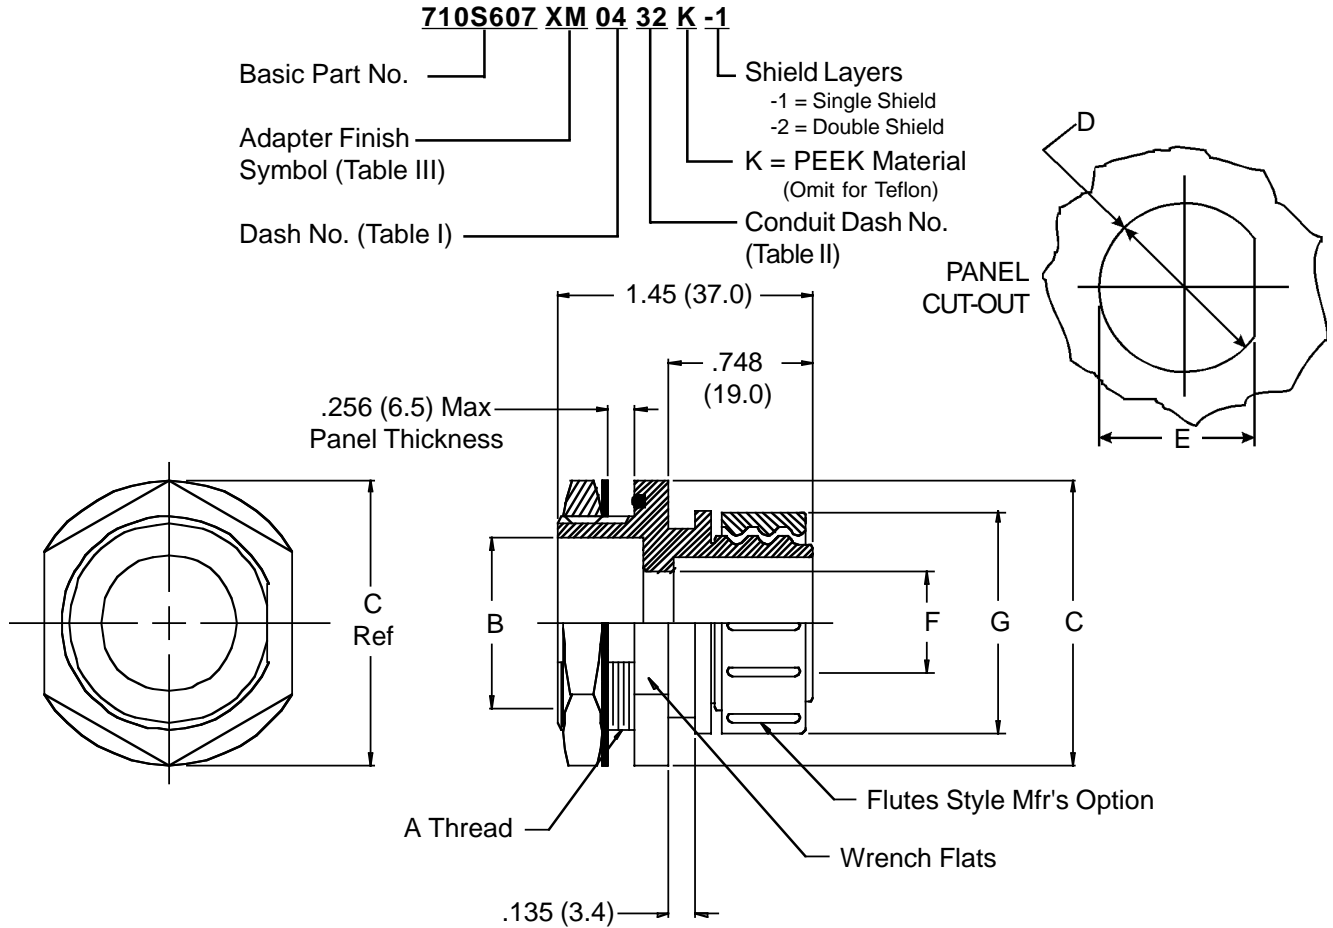


TABLE I						
Dash No.	A Thread Iso Metric	B Dia	C Max	D Dia	E Ref	Max Conduit Dash No. Table II
01	M16 X 1.5 - 6g	.394 (10.0)	.827 (21.0)	.640 (16.3)	.593 (15.1)	12
02	M20 X 1.5 - 6g	.551 (14.0)	1.063 (27.0)	.802 (20.4)	.755 (19.2)	16
03	M27 X 2.0 - 6g	.949 (24.1)	1.496 (38.0)	1.077 (27.4)	1.027 (26.1)	28
04	M36 X 2.0 - 6g	1.181 (30.0)	1.850 (47.0)	1.438 (36.5)	1.388 (35.3)	32

TABLE II			
Conduit Dash No.	F ±.010 (.3)	G Max	Raychem Shrink Boot Part No.
09	.281 (7.1)	.79 (20.1)	202K132-100/180-0
12	.375 (9.5)	.89 (22.6)	202K132-100/180-0
16	.500 (12.7)	1.03 (26.2)	202K142-100/180-0
20	.625 (15.9)	1.15 (29.2)	202K142-100/180-0
24	.750 (19.1)	1.31 (33.3)	202K153-100/180-0
28	.875 (22.2)	1.43 (36.3)	202K163-100/180-0
32	1.000 (25.4)	1.60 (40.6)	202K174-100/180-0

TABLE III	
Finish Symbol	Finish Description
XM	Electroless Nickel
XW	Cadmium Olive Drab Over Electroless Nickel
XO	No Plating - Non-Conductive
XZN	Zinc Nickel - Olive Drab

1. Metric dimensions (mm) are indicated in parentheses.
2. Materials:
 Adapter, Hex Nut, and Rear Nut - Hi-Grade Engineering Thermoplastic.
 Washer - Cres/Passivate.
 O-Ring - Silicone