
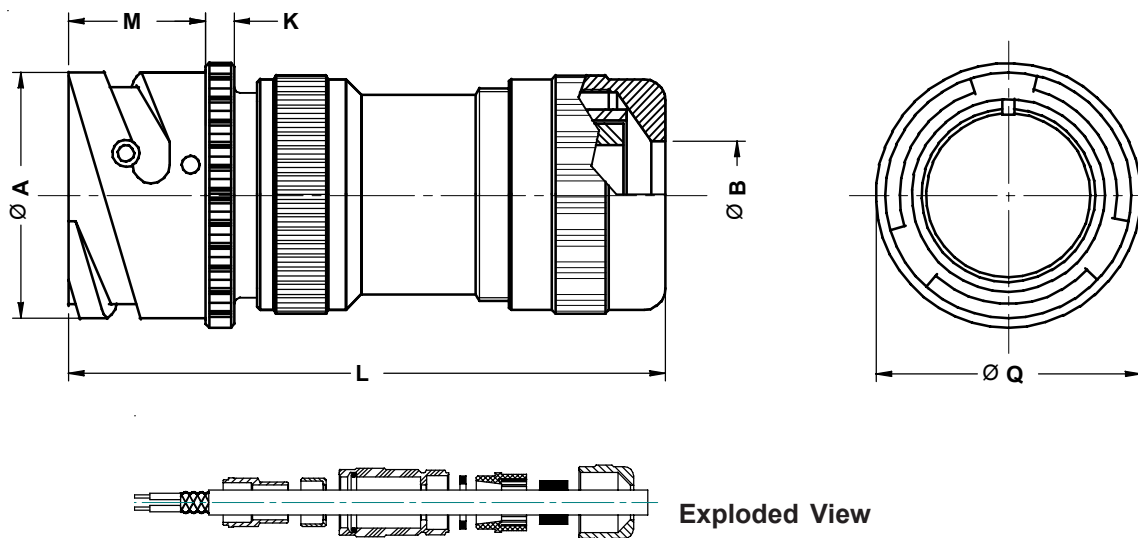


ITS 3101 A (PHM-EMI67) and ITS 4101 A (PHM-EMI67) In-Line Cylindrical Receptacle Assembly with EMI/RFI and Environmental PHM Backshell

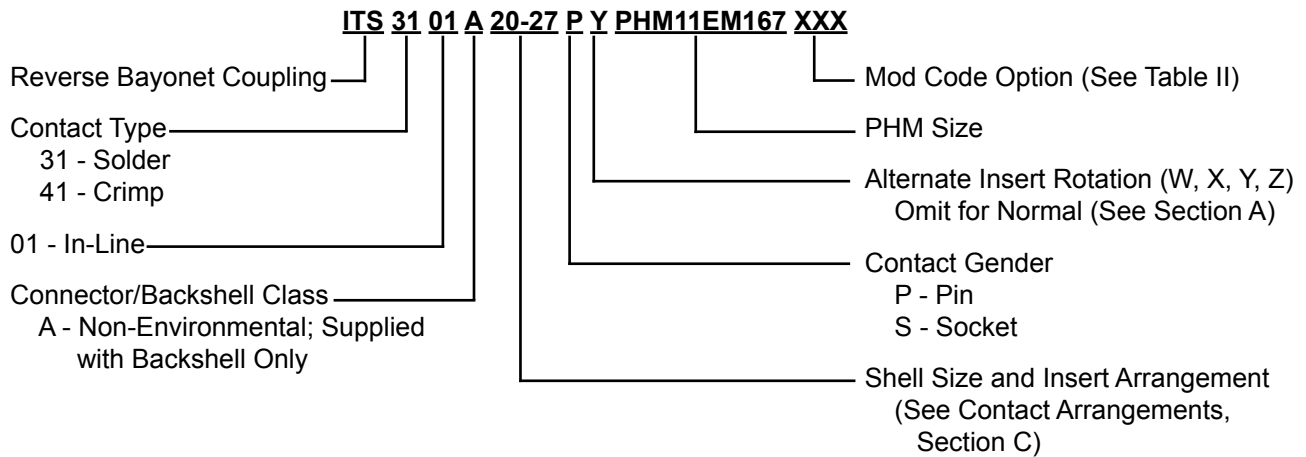

Exploded View

Application Notes:

1. In-line receptacle with an EMI/RFI PHM backshell.
2. Connector/Backshell Class "A" (non-environmental)—Wire sealing grommet not supplied.
3. Standard materials configuration consists of aluminum alloy. For platings, see TABLE II finish options.
4. Standard contact material consists of copper alloy with silver plating or gold plating.
5. A broad range of metric connector accessories are available.
See our website and/or contact the factory for complete information.
6. Standard insert material is synthetic rubber.
Add "FR" prefix to front of part number to specify fire resistant inserts.

**ITS 3101 A (PHM-EMI67) and ITS 4101 A (PHM-EMI67)
In-Line Cylindrical Receptacle Assembly
with EMI/RFI and Environmental PHM Backshell**



TABLE I: DIMENSIONS

Shell Size	PHM Size	ØA +0 -0.1	ØB min. – Max.	K ±0.2	L Max.	M +0.2 -0	ØQ ±0.1
10 SL	11	18.2	2-11	2.8	70	14.3	21.8
14 S	11	24.5	2-11	3.3	70	14.5	28.8
16 S	11	27.2	2-11	3.3	70	14.5	30.5
16	11	27.2	2-11	3.3	80	19.1	30.5
18	11 / 18	30.7	2-11 / 2-16.5	4.0	80	19.1	33.8
20	11 / 18	34.0	2-11 / 2-16.5	4.0	80	19.1	36.9
22	18	37.3	2-16.5	4.0	80	19.6	39.5
24	18 / 22 / 24	40.9	2-16.5 / 15-20 / 19-24	4.0	90	20.6	43.9
28	18 / 22 / 24	46.7	2-16.5 / 15-20 / 19-24	4.0	90	20.7	48.4
32	22 / 24	53.4	15-20 / 19-24	4.0	90	22.3	56.0
36	Contact the factory for information						
40							

TABLE II: MODIFICATION CODES

CONTACT OPTIONS	
Sym	Description
B0	Connector Less Contacts
B1	Connector with Gold Plated Contacts
Omit for standard version (Silver plated)	
FINISH OPTIONS	
Sym	Description and RoHS compliant (*)
F2	Bright Nickel Plating (*)
F6	Black Electrodeposited Paint (*)
F7	Black Zn-Co Plating (*)
F8	Olive Drab Zn-Co Plating
F11	Electroless Nickel (*)
Omit for standard version (Cadmium Olive Drab Finish)	