



240-805 "Mighty Mouse" Filter Connector
Triple-Start ACME Coupling Threads
Master How to Order • Part Number Breakdown

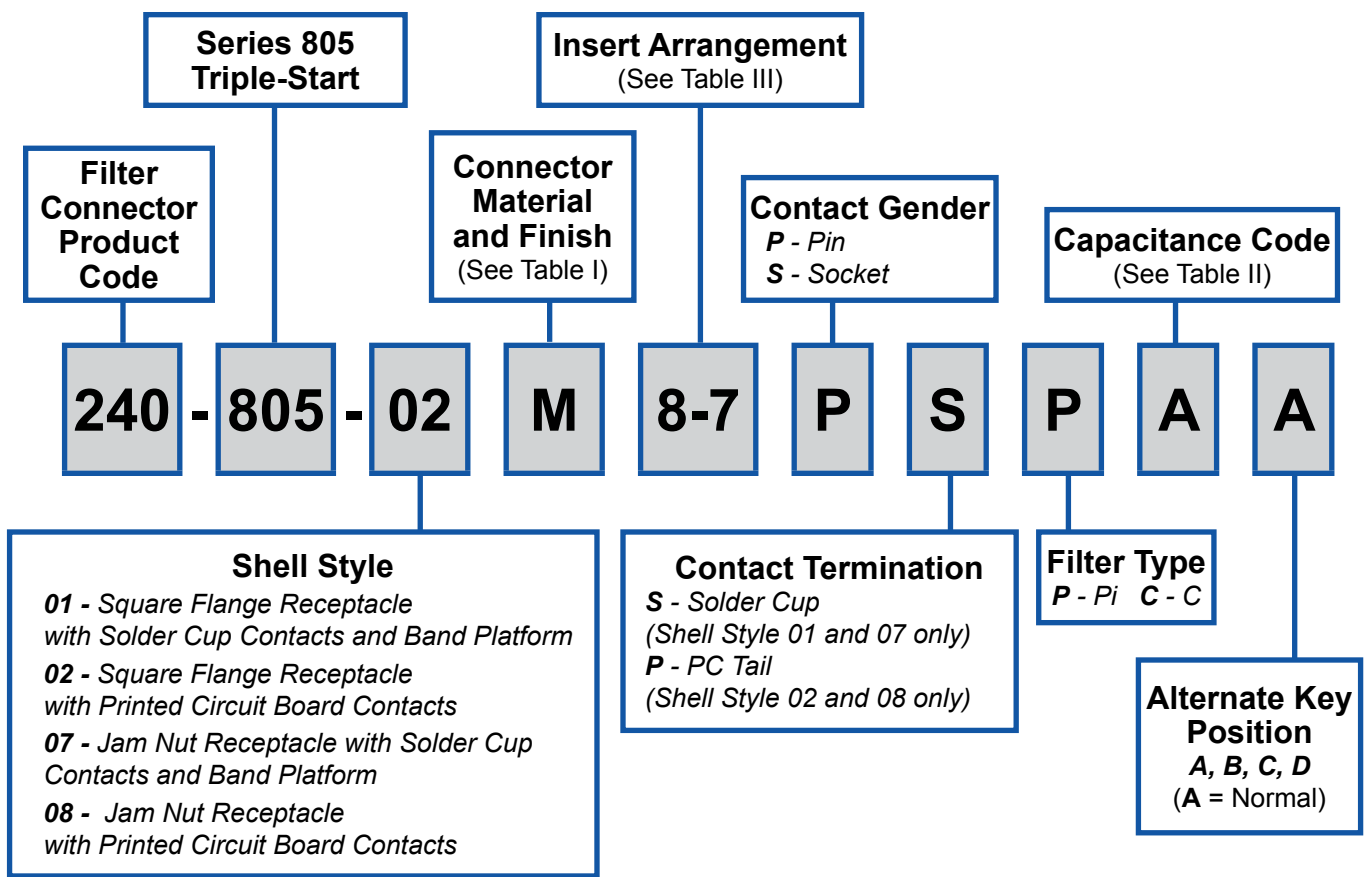


TABLE I: MATERIALS AND FINISH

SYM	MATERIAL	FINISH DESCRIPTION
M	Aluminum	Electroless Nickel
MT	Aluminum	Ni-PTFE 1000 Hour Grey™ (Nickel Fluorocarbon Polymer)
NF	Aluminum	Cadmium O.D. Over Electroless Nickel
P	Stainless Steel	Electro-Deposited Nickel
ZN	Aluminum	Zinc-Nickel Over Electroless Nickel

TABLE II: CAPACITANCE CODE

CODE	PI - CIRCUIT (pF)	C - CIRCUIT (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300

**TABLE III
INSERT ARRANGEMENTS**

Arr. No.	Contact Size	Contact Qty.
8-1	16	1
8-4	23	4
8-7	23	7
9-1	12	1
9-10	23	10
10-13	23	13
11-4	16	4
11-19	23	19
12-26	23	26
15-2	12	2
15-37	23	37
18-55	23	55
19-85	23	85