


MICRO-D MOD CODE LIST

**Mod 474 Keying Option**


Specially modified shells feature keys and keyways for up to five keying positions. Compatible with standard hardware and backshells.



Page K-2

**Mod 497 Ground Spring**


Improve EMI shielding with plug connector ground springs. These gold-plated springs offer lower shell-to-shell resistance and are compatible with standard mating receptacles.



Page K-4

**Mod 428 for 200° C. Continuous Temperature**


Standard Micro-D connectors are rated for 150° C. maximum continuous temperature. Mod 428 changes the potting compound to provide a 200° C. rating.

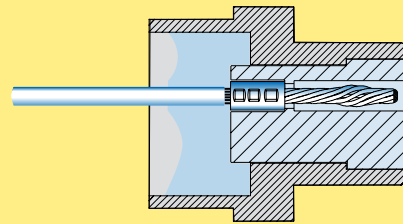

Page K-5

**Mod 429 Space Grade Micro-D**

Save time and cost with the Mod 429 solution. Specify special NASA requirements without the expense of having to create special procurement documentation. This section also contains valuable information on Micro-D's for space applications.

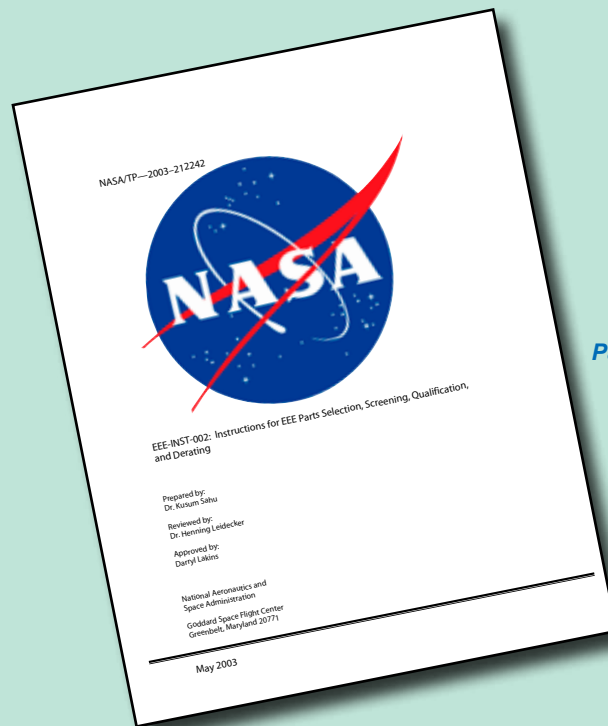

Page K-6