

Swing-Arm® Clamps

for Series 806 Mil-Aero Connectors

870V003 Swing-Arm Saddle Clamp, Braid Sock, SST/Aluminum

Self-Locking



Adapter Code **V**

This accessory fits Glenair Series 806 Mil-Aero connectors


TABLE 1 MATERIAL / FINISH

Aluminum	
ME	Electroless nickel
NF	Olive drab cadmium, selective (fig. 1)
MT	Nickel-PTFE
TZ	Tin-zinc
ZR	Black zinc-nickel
Stainless Steel, Passivated	
BM	Brass interface ring, nickel plated
BMT	Brass interface ring, nickel-PTFE plated
ZI	SST interface ring, passivated
ZM	SST interface ring, nickel plated

Shielded, self-locking, adjustable arms. 870V003 stainless steel or aluminum Swing-Arm saddle clamp fits Glenair Series 806 Mil-Aero connectors. Adjustable arms pivot to 0°, 45° or 90° positions. Supplied with 12 inches (305 mm) of shield braid attached to metal interface ring. Braid choices include 34 AWG nickel/copper, 34 AWG tin/copper, ultralightweight AmberStrand® or microfilament nickel/SST Armorlite®. Full radius saddles have self-locking clinch nuts. Available in two clamp sizes: standard clamp fits most wire bundles, large clamp has increased clearance for oversize wire bundles. Coupling nut has anti-decoupling mechanism for audible detented coupling and prevents backoff under high vibration.

PART NUMBER

	870V003	ME	12	B	L	K	14
Base P/N	870V003						
Material/Finish	See Table 1						
Shell Size	08 09 10 11 12 14 16 18 20 22 24						
Clamp Size	See Clamp Dimensions on next page A Standard Clamp B Large Clamp						
Braid Type	N 34 AWG Nickel/Copper Braid T 34 AWG Tin/Copper Braid A AmberStrand® Nickel/Composite Braid L Microfilament ArmorLite® Nickel/SST Braid						
Splice Ring and Band	Omit if not required. See "Splice Ring and Band" on next page. K Splice ring and standard band J Splice ring and slim standard band						
Braid Length	Omit for standard 12 inch length 14 Length in 1 inch increments, 6 inch min "14" = 14 inches.						

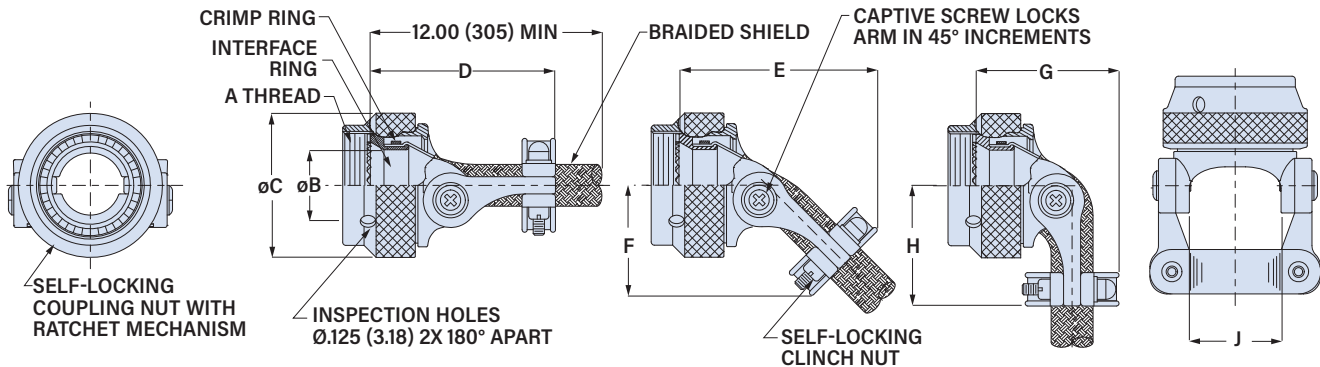


Shell Size	A Thread ISO Metric	ø B Min in mm	ø C Max in mm	D Max in mm	E Max in mm	F Max in mm	G Max in mm	H Max in mm	J Ref. in mm
08	M10 x 1.0-6H	.264 6.7	.812 20.6	1.50 38.1	1.43 36.3	.76 19.3	.95 24.1	.84 21.3	.393 10.0
09	M12 x 1.0-6H	.264 6.7	.812 20.6	1.50 38.1	1.43 36.3	.76 19.3	.95 24.1	.84 21.3	.393 10.0
10	M14 x 1.0-6H	.390 9.9	.938 23.8	1.54 39.1	1.49 37.8	.82 20.8	.99 25.1	.90 22.9	.455 11.6
11	M15 x 1.0-6H	.390 9.9	.938 23.8	1.54 39.1	1.49 37.8	.82 20.8	.99 25.1	.90 22.9	.455 11.6
12	M17 x 1.0-6H	.504 12.8	1.125 28.6	1.62 41.1	1.64 41.7	.92 23.4	1.14 29.0	1.00 25.4	.598 15.2
14	M19 x 1.0-6H	.630 16.0	1.250 31.8	1.63 41.4	1.73 43.9	.98 24.9	1.24 31.5	1.07 27.2	.710 18.0
16	M22 x 1.0-6H	.630 16.0	1.250 31.8	1.63 41.4	1.73 43.9	.98 24.9	1.24 31.5	1.07 27.2	.710 18.0
18	M25 x 1.0-6H	.756 19.2	1.375 34.9	1.73 43.9	1.86 47.2	1.08 27.4	1.36 34.5	1.13 28.7	.839 21.3
20	M28 x 1.0-6H	.843 21.4	1.500 38.1	1.73 43.9	1.93 49.0	1.12 28.4	1.46 37.1	1.20 30.5	.934 23.7
22	M31 x 1.0-6H	.969 24.6	1.625 41.3	1.88 47.8	2.08 52.8	1.21 30.7	1.55 39.4	1.26 32.0	1.068 27.1
24	M34 x 1.0-6H	1.091 27.7	1.750 44.5	1.91 48.5	2.15 54.6	1.27 32.3	1.63 41.4	1.33 33.8	1.197 30.4

Swing-Arm® Clamps

for Series 806 Mil-Aero Connectors

870V003 Swing-Arm Saddle Clamp, Braid Sock, SST/Aluminum

CLAMP DIMENSIONS

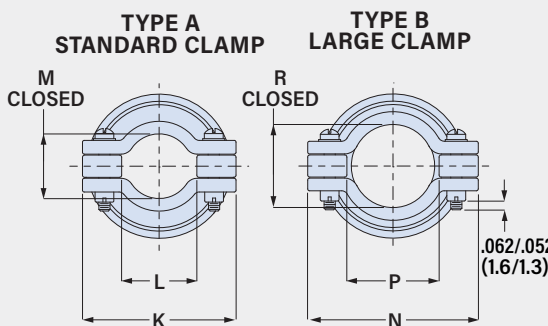

Standard Clamp							Large Clamp						
Shell Size	K Max in	K Max mm	L Min in	L Min mm	M Ref. in	M Ref. mm	Shell Size	N Max in	N Max mm	P Min in	P Min mm	R Ref. in	R Ref. mm
08	.98	24.9	.22	5.6	.265	6.7	08	.98	24.9	.33	8.4	.356	9.0
09	.98	24.9	.22	5.6	.265	6.7	09	.98	24.9	.33	8.4	.356	9.0
10	1.05	26.7	.27	6.9	.310	7.9	10	1.20	30.5	.45	11.4	.422	10.7
11	1.05	26.7	.27	6.9	.310	7.9	11	1.20	30.5	.45	11.4	.422	10.7
12	1.20	30.5	.35	8.9	.422	10.7	12	1.45	36.8	.62	15.7	.637	16.2
14	1.30	33.0	.47	11.9	.538	13.7	14	1.54	39.1	.68	17.3	.707	18.0
16	1.30	33.0	.47	11.9	.538	13.7	16	1.54	39.1	.68	17.3	.707	18.0
18	1.44	36.6	.55	14.0	.590	15.0	18	1.60	40.6	.80	20.3	.759	19.3
20	1.56	39.6	.62	15.7	.660	16.8	20	1.73	43.9	.90	22.9	.841	21.4
22	1.69	42.9	.70	17.8	.744	18.9	22	1.95	49.5	1.05	26.7	.996	25.3
24	1.77	45.0	.78	19.8	.826	21.0	24	2.08	52.8	1.18	30.0	1.060	26.9

MATERIAL/FINISH

Aluminum (Codes M, MT, NF, TZ, ZR)

Coupling nut, body, arms, saddles, interface ring: aluminum

Screws, washers, inserts: stainless steel/passivated

Anti-decoupling spring: thermoplastic

Clinch nuts: Codes M, MT, TZ and ZR:

stainless steel, silver plated. Code NF:

stainless steel/olive drab cadmium

Stainless Steel (Codes BM, BMT, Z1, ZM)

Coupling nut, body, arms, saddles, anti-

decoupling springs, screws, washers,

inserts: stainless steel, passivated

Clinch nuts: stainless steel, silver plated

Interface ring: brass (codes BM, BMT) or

stainless steel (Z1, ZM)

Braid:

Code N: 34 AWG nickel-coated copper

Code T: 34 AWG tin-coated copper,


Code A: *AmberStrand*® ultralightweight

nickel-coated polymer

Code L: *ArmorLite*® lightweight microfilament

nickel-coated 316L stainless steel


INTERFACE RING AND BRAID

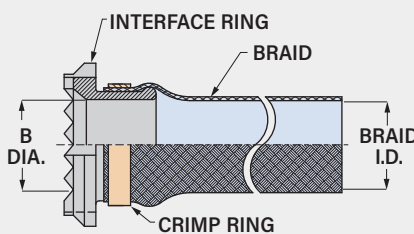

Shell Size	øB Min in.	øB Min mm.	Braid I.D. in.	Braid I.D. mm.
08	.264	6.7	.375	9.53
09	.264	6.7	.375	9.53
10	.390	9.9	.375	9.53
11	.390	9.9	.375	9.53
12	.504	12.8	.781	19.84
14	.592	15.0	.781	19.84
16	.630	16.0	.781	19.84
18	.756	19.2	.781	19.84
20	.843	21.4	.781	19.84
22	.969	24.6	1.000	25.40
24	1.091	27.7	1.000	25.40

SPLICE RING AND PRE-COILED BAND (K AND J OPTIONS)

Optional splice ring provides a reliable, low resistance method of splicing Swing-Arm braid sock to wire bundle braid. Snap splice ring over wire bundle, then overlap braid sock, pigtails and cable braid. install band around splice ring and braid using Band-Master ATS banding tool. *Slim Standard Band* is 50% lighter weight than standard band with no reduction in strength.

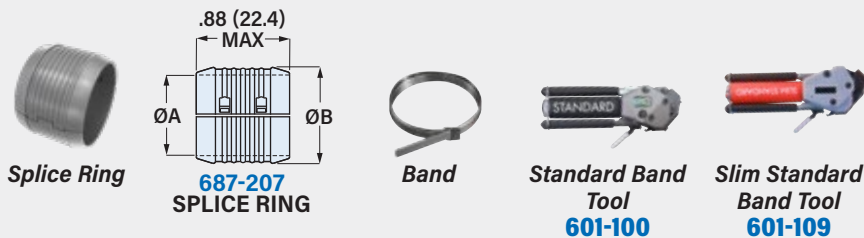

Shell Size	Band Part Number		Split Ring Part Number	øA		øB	
	Standard	Slim Standard		± .03 (0.8) in	± .03 (0.8) mm	± .03 (0.8) in	± .03 (0.8) mm
08	601-006	601-571	687-207XB04	.25	6.4	.40	10.2
10	601-006	601-571	687-207XB06	.38	9.7	.53	13.5
12	601-006	601-571	687-207XB08	.50	12.7	.65	16.5
14	601-006	601-571	687-207XB10	.63	16.0	.78	19.8
16	601-006	601-571	687-207XB12	.75	19.1	.90	22.9
18	601-006	601-571	687-207XB14	.88	22.4	1.03	26.2
20	601-041	601-573	687-207XB16	1.00	25.4	1.15	29.2
22	601-041	601-573	687-207XB18	1.13	28.7	1.28	32.5
24	601-041	601-573	687-207XB20	1.25	31.8	1.40	35.6

FIGURE 1
NF SELECTIVE FINISH

