Series 233 SuperNine®

- MIL-DTL-38999 Series III
- Triple-start ACME mating threads
- High vibration, high temperature
- 20 contact arrangements
- Contact alignment keyway
- Compatible with M85049 accessories
- For use with MIL-DTL-38999 type size 8 El Ochito® contacts

For More Information

Plug/Receptacle Crimp Contact..... 233-217
Plug/Receptacle Crimp Contact..... 233-224(1)
Receptacles, Wall Mount PC Tail .... 233-218(1)
Receptacle, Wall Mount
Dual Flange PC Tail..... 233-225

(1) SuperNine Catalog

Glenair recommends the use of saddle bar backshells such as 620HS090 and 443-042 for proper strain relief

Series 882 SuperFly® DataLink

- Ultra-small, lightweight
- Push-pull or threaded coupling
- High shock and vibration
- Robust EMI shielding
- IP67 immersion rating

For More Information

Push-Pull Plug..... 882-001(1)
Push-Pull Receptacle..... 882-002(1)
Push-Pull Receptacle, PC Tail..... 882-005(1)
Plug, Threaded Coupling..... 882-003(1)
Receptacle, Threaded Coupling..... 882-006(1)
Recep, Threaded, PC Tail ..... 882-004(1)

(1) Contact Glenair for data sheet

For details see our Series 882 SuperFly catalog.

Series 816 Mil-Aero

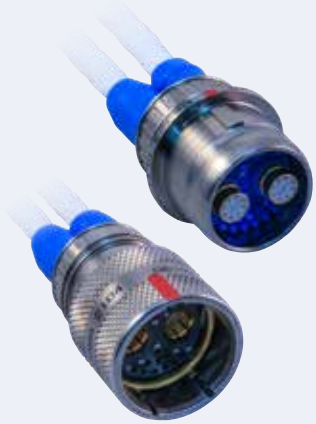

- Next-generation high performance ultraminiature aerospace connector
- Push-pull quick disconnect
- Higher density 20HD and 22HD contact arrangements
- High strength aluminum alloy plug barrel
- Snap in, rear release crimp contacts

For More Information

Plug, Inline..... 816-001
Receptacle, Inline. 816-002
Receptacle, Front Panel Mount 816-003
Receptacle, Rear Panel Mount..... 816-004
Plug, Rear Panel Mount, PC Tails..... 816-005
Receptacle, Jam-Nut Mount, with PC Tails..... 816-006
Plug, Lanyard Release..... 816-007
Receptacle, Lanyard Release 816-008

Glenair recommends the use of special Series 806 saddle bar backshells such as 620VS090 and 443-042 for proper strain relief. See Series 806 catalog.

Series 806 Mil-Aero

- Next-generation high performance ultraminiature aerospace connector
- Reduced pitch triple-start modified anti-decoupling stub ACME thread
- Higher density 20HD and 22HD contact arrangements
- High strength aluminum alloy plug barrel
- Snap in, rear release crimp contacts
- Up to 8 El Ochito contacts

For More Information

Plug, Free-Hanging	806-012
Receptacle, Wall Mount	806-013
Receptacle, Free-Hanging	806-019
Receptacle, Jam-Nut Mount	806-020
Receptacle, Wall Mount	806-022
Receptacle, Jam-Nut Mount, with PC Tails	806-039
Receptacle, Wall Mount with PC Tails	806-040

Glenair recommends the use of saddle bar backshells such as 620VS090 and 443-042 proper strain relief. See Series 806 catalog.

Series 792 Ultraminiature Rectangular



- Next-generation rear release rectangular
- 1 – 9 El Ochito® contacts
- Dual lobe shell polarization
- Scoop-proof interface
- Straight and right angle PC tail
- Environmentally sealed
- EMI protected
- Guide Pins for blind mate

For More Information

Plugs, Free-Hanging	792-001(1)
Receptacles, Free-Hanging	792-002(1)
Plugs, Panel Mount	792-003(1)
Receptacles, Panel Mount	792-004(1)
Plugs, Straight PC Tails	792-005(1)
Receptacles, Straight PC Tails	792-006(1)
Plug, Straight PC Tails, Panel Mt.	792-007(1)
Recep, Straight PC Tails, Panel Mt.	792-008(1)
Plugs, 90° PC Tails	792-009(1)
Receptacles, 90° PC Tails	792-010(1)
Plugs, 90° PC Tails, Panel Mt.	792-011(1)
Recep, 90° PC Tails, Panel Mt	792-012(1)

(1) Contact Glenair for data sheet.

Series 28 HiPer-D®

- Standard M24308 interface dimensions
- Rugged machined 6061 aluminum shell
- Grounded metal insert
- 1 – 5 El Ochito® contacts
- Straight PC tail
- EMI protected

For More Information

Plugs, Free-Hanging	280-082(1)
Receptacles, Free-Hanging	280-083(1)
Plugs, Straight PC Tails	280-090(2)
Receptacles, Straight PC Tails	280-091(2)

(1) Series 28 HiPer-D Catalog
(2) Contact Glenair for data sheet

© 2022 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • El Ochito® Octaxial Contacts
Dimensions in Inches (millimeters) are subject to change without notice.