

**TurboFlex® Copper, Dual-Layer Duraelectric™ D Insulation/Jacket, Microfilament Braided Shield, 3000 VAC • 961-163 Imperial**

MICROFILAMENT BRAIDED • COPPER CORE

**FEATURES**


- Glenair microfilament braided shield (ArmorLite™ or AmberStrand) provides lightweight grounding.
- Black Duraelectric D insulation to protect the conductor, surrounded with a lightweight microfilament braided shield, with an outer jacket for overall cable protection.

How to Order TurboFlex®					
<b>Sample Part Number</b>	<b>961-163</b>	<b>-T</b>	<b>-AM</b>	<b>-A</b>	<b>-2</b>
<b>Basic No.</b>	TurboFlex with .093" Duraelectric D Insulation / Jacket				
<b>Conductor Material</b>	-T = Tin/Copper (-65° - 150°C) -S = Silver/Copper (-65° - 200°C) -N = Nickel/Copper (-65° - 200°C)				
<b>Braided Shield Material</b>	-AM = AmberStrand    -AR = ArmorLite -CF = ArmorLite CF				
<b>Wire Size (See Table I)</b>	<b>R, S, A, B, C, D, E, F, G, H, I, J, K, M, L</b>				
<b>Outer Duraelectric D Jacket Color</b>	See Table II				

AWG Code	AWG	Strand/ Count/ AWG	Cir Mil (nom)	Ø A Conductor in. (mm)	ØE in. (mm)	"B" Insulation Wall Thickness in. (mm)	"C" Shield Thickness in. (mm)	"D" Outer Jacket Wall Thickness in. (mm)
R	16	7 X 15/36	2625	.063 (1.60)	.457 (11.61)	.093 (2.36)	.011 (0.28)	.093 (2.36)
S	14	7 X 24/36	4200	.080 (2.03)	.474 (12.04)			
A	12	7 X 37/36	6475	.099 (2.51)	.493 (12.52)			
B	10	7 X 59/36	10325	.126 (3.20)	.520 (13.21)			
C	8	7 X 95/36	16625	.159 (4.04)	.553 (14.05)			
D	6	7 X 150/36	26250	.200 (5.08)	.594 (15.09)			
E	4	7 X 7 X 34/36	41650	.271 (6.88)	.665 (16.89)			
F	2	7 X 7 X 54/36	66150	.342 (8.69)	.736 (18.69)			
G	1/0	7 X 7 X 86/36	105350	.431 (10.95)	.825 (20.96)			
H	2/0	7 X 7 X 108/36	132300	.483 (12.27)	.877 (22.28)			
I	3/0	19 X 7 X 51/36	169575	.547 (13.89)	.941 (23.90)			
J	4/0	19 X 7 X 64/36	212800	.613 (15.57)	1.007 (25.58)			
K	250 MCM	19 X 7 X 75/36	249375	.663 (16.84)	1.057 (26.85)			
M	350 MCM	19 X 7 X 106/36	352450	.789 (20.04)	1.183 (30.05)			
L	450 MCM	19 X 7 X 135/36	448875	.890 (22.61)	1.284 (32.61)			

Weatherproof, halogen free, flame resistant	
0	Black
1	Brown
2	Red
3	Orange
4	Yellow
5	Kelly Green
6	Blue
7	Violet
8	Gray
9	White
OG	Dark Olive Green
DT	Desert Tan

Consult factory for other specific colors

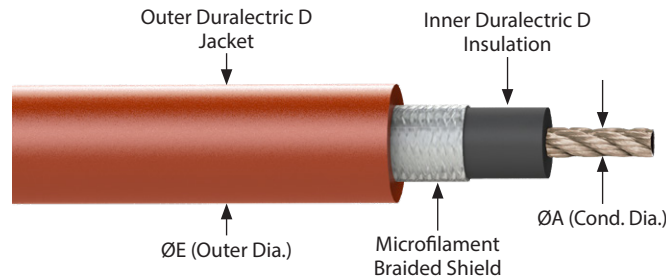

**NOTES**

1. Bend radius is 4X the outer diameter
2. Cable will be marked with "GLENAIR TURBOFLEX", wire gauge, part number, CAGE 06324.
3. Jacket thickness tolerance is ±10%
4. Braided shield has 90% optical coverage

**TurboFlex® Copper, Dual-Layer Duralectric™ D Insulation/Jacket, Microfilament Braided Shield, 3000 VAC • 961-163 Imperial**

Table I: TurboFlex DC Resistance and Ampacity Ratings					
AWG Code	DC Resistance @ 20°C (Ohms / 1000 ft.)			Ampacity (Amps) 40°C Ambient	
	Nickel Copper	Tin Copper	Silver Copper	Nickel Copper	Tin/Silver Copper
R	4.5510	4.5930	4.2780	40	36
S	2.8450	2.8710	2.6740	59	54
A	1.8450	1.8620	1.7340	78	68
B	1.1570	1.1680	1.0880	107	90
C	.7188	.7252	.6755	142	124
D	.4551	.4593	.4278	205	165
E	.2979	.3006	.2800	278	220
F	.1876	.1893	.1763	381	293
G	.1178	.1188	.1107	532	399
H	.0938	.0946	.0882	591	467
I	.0738	.0745	.0694	708	546
J	.0588	.0594	.0553	830	629
K	.0502	.0507	.0472	910	705
M	.0355	.0359	.0334	1140	880
L	.0279	.0282	.0262	1320	1020

Maximum ampacities are based on temperature rise to limits of the materials used in cable construction, based on single cable bundle in free air and at sea level pressure. Consult Glenair for more information.

Ampacity Ratings: Ambient Temperature Correction Factors	
Ambient Temp (°C)	For ambient temperatures other than 40°C (104°F), multiply the allowable ampacities from the table above by the appropriate factor below
41 – 50	0.97
51 – 60	0.94
61 – 70	0.90
71 – 80	0.87
81 – 90	0.83
91 – 100	0.79
101 – 120	0.71
121 – 140	0.61
141 – 160	0.50
161 – 180	0.35
181 – 200	----
201 – 255	----

MICROFILAMENT BRAIDED • COPPER CORE