



MISSION-CRITICAL
**INTERCONNECT
SOLUTIONS**



Nett Warrior
NWPAN-WP-20210223
APPROVED

INTEROPERABLE
NATO STANAG 4695
Soldier Power Connectors



NEW 10 AMP CONFIGURATIONS

Series 807 Mighty Mouse NW “The Nett Warrior Connector”

Crimp • PC Tail • Solder Cup • Pigtail Assemblies

NOVEMBER 2022



PUSH-PULL QDC

Nett Warrior Power and Data Connectors

Series 807 Mighty Mouse NW micro miniature connectors for dismounted soldier battery charging, radio, and PAN applications, NSN stock-listed.

Today's warfighters demand quick battery charging and reliable radio operation. Glenair pioneered the original 6-pin Nett Warrior connector, as well as a second-generation 7-pin series with USB-C power integration and delivery. Now Glenair is introducing a signature 10 Amp Crown Ring contact-equipped version for higher-current applications that easily integrates into US / NATO, Nett Warrior, and STAR-PAN hub and cable systems. Contacts are capable of carrying 10 amps of current across 3 separate channels with less than 30°C of temperature rise. Electrical resistance remains consistent across 2000 mating cycles. Best of all, Glenair has integrated the new 10 Amp contact connectors into our next-generation STAR-PAN NG platform, ensuring intelligent, system-wide handling of warfighter electronic equipment—for both 10 Amp-capable devices as well as lower-power legacy hardware.

Glenair STAR-PAN NG hubs and cables—now equipped with 10 Amp Crown Ring contact receptacles—are smart devices capable of managing next-generation high-power equipment as well as lower-power legacy devices.

SERIES 807 MIGHTY MOUSE NW CONNECTOR LINE

All designs backward-compatible with current and legacy Nett Warrior hardware

- Original 6-pin Nett Warrior plugs and receptacles
- Backward-compatible 7-pin series with USB-C power integration and delivery
- New 10 Amp receptacles for higher-current soldier battery, radio, and PAN C4ISR equipment



US ARMY AND NATO QUALIFIED

Nett Warrior Connectors

For STAR-PAN hub systems, Nett Warrior C4ISR hardware, next-gen and legacy radios and batteries



QUALIFIED FOR USE WITH ALL STAR-PAN AND STAR-PAN NG POWER / DATA HUBS




Glenair Signature Mighty Mouse 807 NW connectors are available in pigtail and point-to-point cables for all US/NATO soldier C4ISR devices.


MATERIALS / FINISH

- Shell: Al alloy / ZNU plated
- Contacts: Cu alloy / Au plated
- Insulators: Rigid dielectric
- O-rings: Fluorosilicone


Series 807 NW Nett Warrior Connector Insert Arrangements



Original NSN-Listed 6-Pin (Nett Warrior Program / NATO STANAG 4695 Approved)



Backward-Compatible 7-Pin USB-C Power Series




10-Amp STAR-PAN NG Series 6-6 and 6-7 Arrangements

SERIES 807 MIGHTY MOUSE NW CONNECTOR LINE: HOW-TO-ORDER



Series 807 NW Plugs (6 pin)	Crimp	PC Tail	Solder Cup	In-Line	Rear Mount Jam Nut	Front Mount Jam Nut
8070-1676-06ZNU6-6PY NSN 5935-01-659-5575	X			X		
807-871-06ZNU6-6PY	X			X		
807-309-06ZNU6-6PY			X	X		
8070-1153-07ZNU6-6EC			X		X	
8070-1153-07ZNU6-6PC		X			X	
8070-1153-00ZNU6-6EC			X			X
8070-1153-00ZNU6-6PC		X				X
Series 807 NW Receptacles (6 socket)	Crimp	PC Tail	Solder Cup	In-Line	Rear Mount Jam Nut	Front Mount Jam Nut
8070-1675-01ZNU6-6SY NSN 5935-01-659-4090	X			X		
8070-1675-07ZNU6-6SY	X				X	
8070-1675-00ZNU6-6SY	X					X
807-874-01ZNU6-6SY	X			X		
807-874-00ZNU6-6SY	X					X
807-874-07ZNU6-6SY	X				X	
807-348-01ZNU6-6SY			X	X		
807-216-07ZNU6-6SY			X		X	
807-216-01ZNU6-6SY			X	X		
807-216-00ZNU6-6SY			X			X
807-216-07ZNU6-6DY		X			X	
807-216-01ZNU6-6DY		X		X		
807-216-00ZNU6-6DY		X				X
Series 807 NW Plugs (7 pin)	Crimp	PC Tail	Solder Cup	In-Line	Rear Mount Jam Nut	Front Mount Jam Nut
8070-1676-06ZNU6-7PY	X			X		
807-871-06ZNU6-7PY	X			X		
Series 807 NW Receptacles (7 socket)	Crimp	PC Tail	Solder Cup	In-Line	Rear Mount Jam Nut	Front Mount Jam Nut
8070-1675-01ZNU6-7SY	X			X		
8070-1675-07ZNU6-7SY	X				X	
8070-1675-00ZNU6-7SY	X					X
807-874-01ZNU6-7SY	X			X		
807-874-00ZNU6-7SY	X					X
807-874-07ZNU6-7SY	X				X	
8070-1299-ZNU6-7DY		X				X
Series 807 NW Receptacles (10 Amp)	Pigtail Assembly	PC Tail	Solder Cup	In-Line	Rear Mount Jam Nut	Front Mount Jam Nut
8071-6924	X			X		
8070-3151-07ZNU6-6SY		X			X	

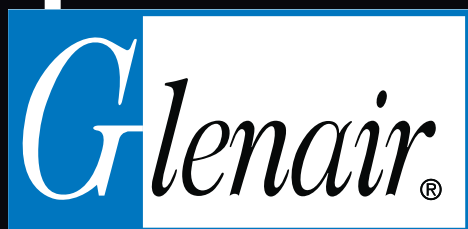

MISSION-CRITICAL INTERCONNECT SOLUTIONS

Glenair, Inc.

1211 Air Way • Glendale, California • 91201-2497
Telephone: 818-247-6000 • Fax: 818-500-9912 • sales@glenair.com
www.glenair.com

Glenair East
20 Sterling Drive
Wallingford, CT
06492

Telephone:
203-741-1115
Facsimile:
203-741-0053
sales@glenair.com

Glenair UK Ltd
40 Lower Oakham Way
Oakham Business Park
Mansfield, Notts
NG18 5BY England

Telephone:
+44-1623-638100
Facsimile:
+44-1623-638111
sales@glenair.co.uk

Glenair Microway Systems
7000 North Lawndale Avenue
Lincolnwood, IL
60712

Telephone:
847-679-8833
Facsimile:
847-679-8849

Glenair Nordic AB
Gustav III:s Boulevard 42
SE-169 27 Solna
Sweden

Telephone:
+46-8-50550000
sales@glenair.se

Glenair GmbH
Schaberweg 28
61348 Bad Homburg
Germany

Telephone:
06172 / 68 16 0
Facsimile:
06172 / 68 16 90
info@glenair.de

Glenair Iberica
C/ La Vega, 16
45612 Velada
Spain

Telephone:
+34-925-89-29-88
Facsimile:
+34-925-89-29-87
sales@glenair.es

Glenair Italia S.p.A.
Via Del Lavoro, 7
40057 Quarto Inferiore –
Granarolo dell'Emilia
Bologna, Italy

Telephone:
+39-051-782811
Facsimile:
+39-051-782259
info@glenair.it

Glenair France SARL
7, Avenue Parmentier
Immeuble Central Parc #2
31200 Toulouse
France

Telephone:
+33-5-34-40-97-40
Facsimile:
+33-5-61-47-86-10
sales@glenair.fr

Glenair Korea
6-21Tapsil-ro 58beon-gil
Giheung-gu, Yongin-si
Gyeonggi-do
Republic of Korea

Telephone:
+82-07-5067-2437
Facsimile:
+82-504-375-4549
sales@glenair.kr

Glenair Japan
40F, Nagoya Lucent Tower,
6-1, Ushijima-cho,
Nishi-ku, Nagoya, 451-6040
Japan

Telephone:
+81-52-569-2521
Facsimile:
+81-52-569-2523
sales@glenair.jp