Series 78 Rubber Covers

for Series 802 AquaMouse Connectors

100 och co och nyadinouse connectors





809-192 Rubber Cover, Receptacle



MATERIAL / FINISH


Cover: black neoprene (standard), fungus resistant, sulfur-free Code C: conductive black neoprene, 100 ohms/sq. minimum Attachment cord: nylon, black Cable tie: black nylon with passivated SST screw and locknut Ring, eyelet: SST, black zinc cobalt Slip knot sleeve: copper/ black zinc cobalt





	Ø	ØA ± .060 (1.5)		øв ± .060 (1.5)	
Shell	± .060				
Size	ln.	mm.	ln	mm.	
-05	.41	10.4	.530	13.5	
-06	.53	13.5	.660	16.8	
-07	.60	15.2	.720	18.3	
-08	.66	16.8	.780	19.8	
-09	.72	18.3	.850	21.6	
-10	.78	19.8	.910	23.1	
-12	.85	21.6	.970	24.6	
-14	1.03	26.2	1.160	29.5	
-15	1.10	27.9	1.220	31.0	
-21	1.41	35.8	1.530	38.9	

809-192 covers fit Glenair Series 802 "AquaMouse" receptacle connectors. Rugged molded rubber "Mini-Bean" cover protects equipment from dust and damage. Fungus-resistant, sulfur-free neoprene with nylon rope. Attachment choices include cable tie, slip knot or ring. Rings are stainless steel with non-reflective black coating. Splashproof, not submersible.

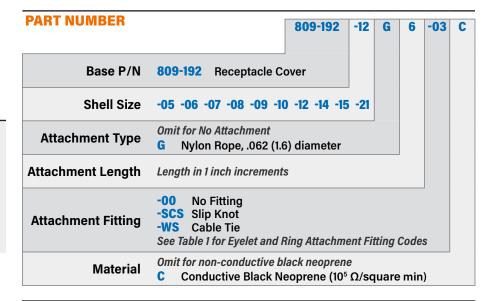





Copper sleeve with black zinc cobalt finish. May be crimped after adjustment to permanently fix location.

RING

	Ring I.D.		Ring I.D.
Code	± .015 (0.4)	Code	± .015 (0.4)
-32	.265 (6.7)	-16	.885 (22.5)
-29	.315 (8.0)	-17	.896 (22.8)
-08	.385 (9.8)	-26	.950 (24.1)
-09	.445 (11.3)	-28	1.015 (25.8)
-10	.516 (13.1)	-19	1.070 (27.2)
-11	.570 (14.5)	-20	1.135 (28.8)
-12	.583 (14.8)	-22	1.210 (30.7)
-13	.635 (16.1)	-23	1.275 (32.4)
-14	.695 (17.7)	-30	1.380 (35.1)
-27	.766 (19.5)	-25	1.530 (38.9)



6/6 nylon cable tie with screw and locknut. 1.77 (45.0) max. wire bundle dia. -40 to +85 °C.





	Eyelet I.D.
Code	± .010 (0.3)
-01	.126 (3.2)
-02	.140 (3.6)
-03	.145 (3.7)
-04	.156 (4.0)
-05	.167 (4.2)
-06	.188 (4.8)
-07	.197 (5.0)