



FO04309 ARINC801 Fiber Optic Test Probe Keyed Jumper Assembly

Fiber optic test probe for fast and easy optical analysis of installed fiber optic systems

How To Order


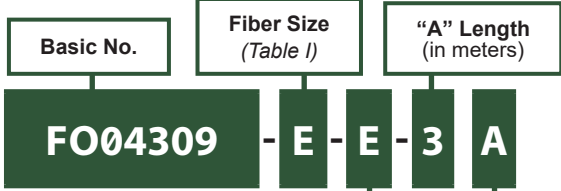


Table I: Fiber Size	
Symbol	Size
E	Singlemode 9.3/125
F	Singlemode 5.8/125
G	Singlemode 7.5/125

Optical insertion loss ≤ 1.0 dB @ 1310 nm wavelength.
Glenair Fiber Optic Test Probe U.S. Patent Number 5,960,137.

- Connector Type:**
A = ST Connector
B = FC Connector
C = SC Connector
D = LC Connector
E = FC/APC Connector
F = SC/APC Connector
G = LC/APC Connector

A = ARINC 801

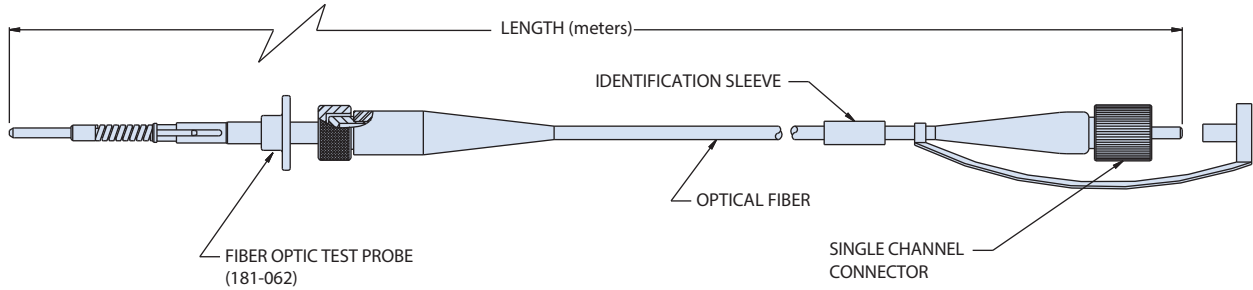


Note

- "APC" physical contact polish to be IAW Glenair manufacturing procedure AWS-A040-F
- For use with the following test probe adapters:
180-131: GHD (180-122)

Fiber optic polishing tool for ARINC 801 style termini fiber optic test probes

How To Order

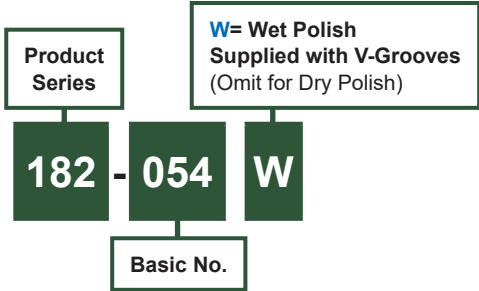

Note

- Polishing puck is for PC polish only. For APC Glenair recommends autopolish, consult factory for more information
- Polishing tool is designed for use with the following Glenair termini:
181-047 (Pin, size 18 terminus)
181-056 (Pin, size 18 terminus)