


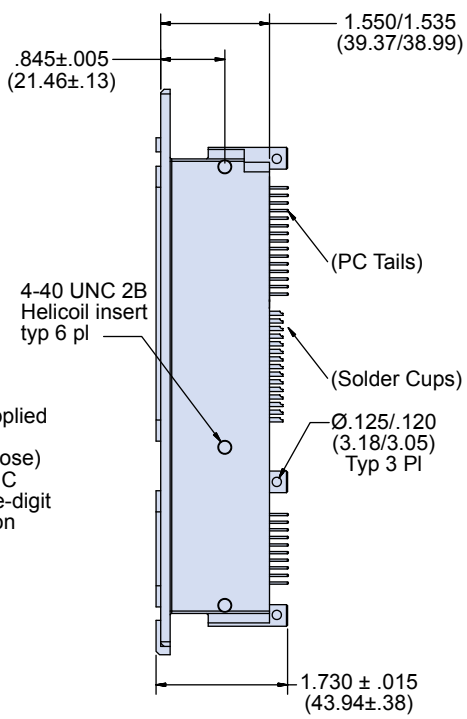
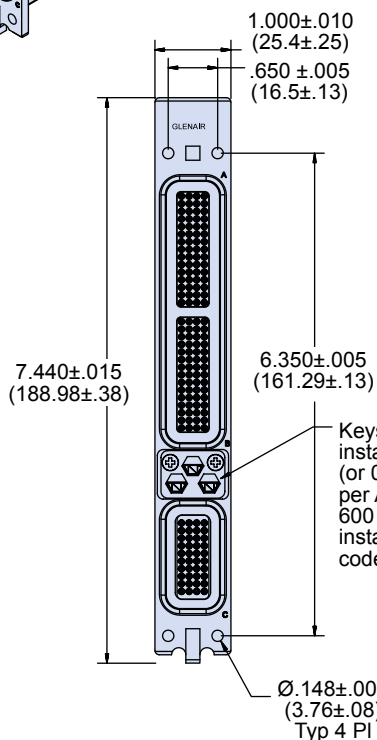


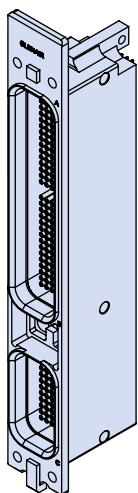

240-601  
ARINC 600 Size 1  
Environmentally Compatible Filter Receptacle

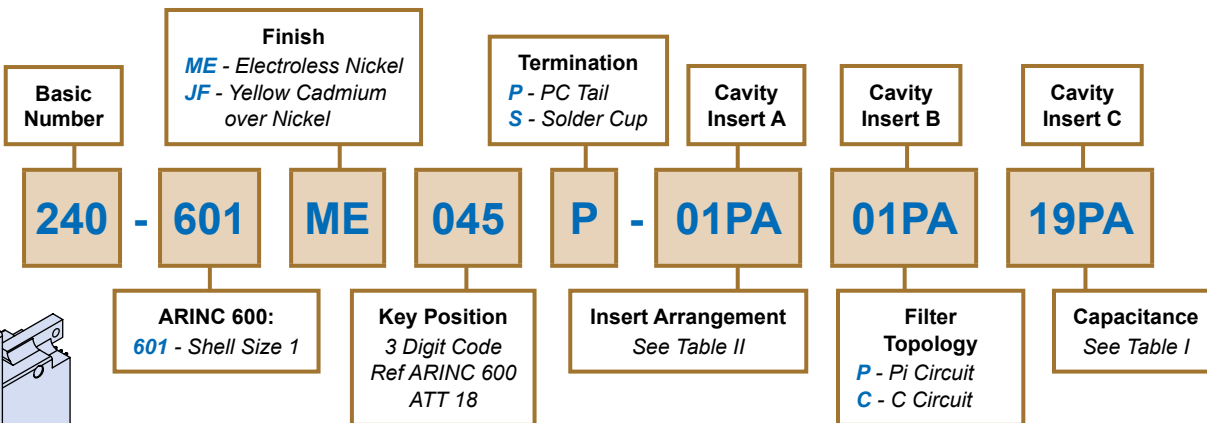


Dimensions in inches (millimeters) and are subject to change without notice.


240-601  
ARINC 600 Size 1  
Environmentally Compatible Filter Receptacle




Table II: Insert Arrangements

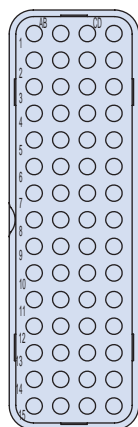


Insert 01  
60 #22

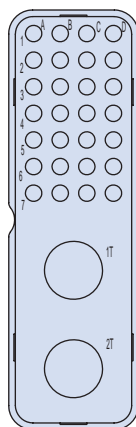


Insert 20  
30 #22  
2 #8

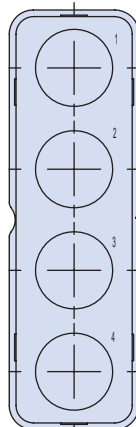


Insert 27  
4 #8



Insert 03  
2 #5 Coax  
1 #12  
2 #16



Insert 19  
40 #22



Insert 21  
4 #12

Insert contains grounded coax non-filtered

Table I: Capacitor Array Code / Capacitance Range

Class	Pi - Circuit (pF)	C - Circuit (pF)
X	160,000 - 240,000	80,000 - 120,000
Y	80,000 - 120,000	40,000 - 60,000
Z	60,000 - 90,000	30,000 - 45,000
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70-120	35-60



Notes

- Glenair ARINC 600 receptacle is designed to mate with COTS ARINC 600 plug IAW ARINC 600 specification with the same insert configuration
- Material/Finish:  
Shell: Aircraft Grade Aluminum  
Insulators: High Grade Rigid Dielectric  
PC Tail and Solder Cup Contacts: Copper Alloy/Gold over Nickel
- Assembly to be permanently identified with (space permitting) Glenair, part number, cavity and contact location, and date code.
- Insert arrangement in accordance with ARINC 600 (arrangement shown for reference only)
- EMI filter receptacle connector designed to meet requirements of MIL-STD-2120 and ARINC 600.
- Electrical Parameters:  
Working Voltage - 200 VDC, 115 VAC 400Hz  
Dielectric Withstanding Voltage (DWV) - 500 VDC  
Insulation Resistance (IR) - 5000 Megohms min at 200 VDC
- Custom filter types available (consult factory).
- Additional mounting features available (consult factory).
- Environmental compatibility features:  
Single piece shell to limit any contaminants or moisture ingress due to post-processing such as solder wash.  
Termination area sealed via o-rings around each module.  
Termination may utilize sealing compound to further aid in environmental compatibility

Dimensions in inches (millimeters) and are subject to change without notice.