

SERIES 80

Mighty Mouse Connectors

Size #8 100 Ohm Quadrax Contacts



SIZE #8 QUADRAX CONTACTS

100 Ohm quadrax contacts accept standard flight-grade star quad cable. These snap-in, rear release contacts fit Glenair Series 800 through 805 Mighty Mouse connectors (not compatible with Series 806) with size #8 keyed insulators to properly align contact. Crimp termination. Contact has in-line key for alignment in connector. Gold-plated copper alloy, thermoplastic insulators. Supplied as unassembled kit.

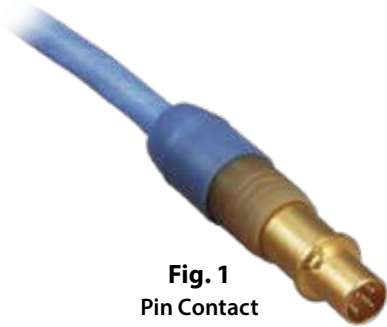


Fig. 1
Pin Contact
854-001

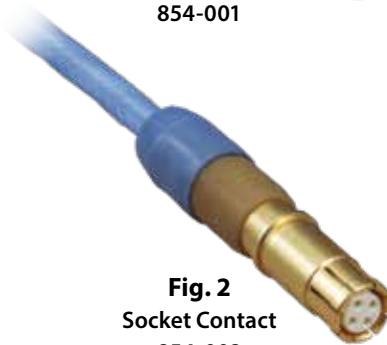


Fig. 2
Socket Contact
854-002


Figure	Cable Accommodation	Contact Type	Part Number Contact Only	P/N Contact and Sealing Boot	Wire AWG	Cable OD
1	Tensolite NF22Q100 Draka F-4704-7	Pin	854-001-05	854-001-05F	22	.190 (4.83)
1	PIC E51424 Tensolite NF24Q100	Pin	854-001-02	854-001-02F	24	.163 (4.14)
1	PIC E50424 Draka F 4704-4	Pin	854-001-04	854-001-04F	24	.175 (4.44)
1	PIC E51426 Tensolite NF26Q100	Pin	854-001-01	854-001-01F	26	.143 (3.63)
1	Draka F 4704-6	Pin	854-001-03	854-001-03F	26	.149 (3.78)
2	Tensolite NF22Q100 Draka F-4704-7	Socket	854-002-05	854-002-05F	22	.190 (4.83)
2	PIC E51424 Tensolite NF24Q100	Socket	854-002-02	854-002-02F	24	.163 (4.14)
2	PIC E50424 Draka F 4704-4	Socket	854-002-04	854-002-04F	24	.175 (4.44)
2	PIC E51426 Tensolite NF26Q100	Socket	854-002-01	854-002-01F	26	.143 (3.63)
2	Draka F 4704-6	Socket	854-002-03	854-002-03F	26	.149 (3.78)

Material And Finish	
Contact Body, Inner Contact	Copper Alloy / Gold Plated
Crimp Ferrule	Brass or Equivalent / Gold Plated
Insulator	PTFE, Polyetherimide or equivalent
Sealing Boot Grommet	Fluorosilicone
Grommet Follower	Polyetherimide

Contact Crimp and Removal Tools		
Description	Glenair P/N	Military P/N
Inner Contact, Crimp Tool	809-015	M22520/2-01
Inner Contact, Positioner	809-240	M22520/2-37
Outer Contact, Crimp Tool	809-129	M22520/5-01
Outer Contact, Hex Die	859-048	M22520/5-105
Contact Removal Tool	859-049	M81969/14-12

Contact Specifications	
Characteristic Impedance	100 Ohms ± 10 Ohms
Frequency Range	DC – 3 GHz
Insulation Resistance, Ambient Temperature	5000 megOhms minimum
Contact Resistance – Inner Contact	15.0 milliOhms maximum initial @ 1ampere
Contact Resistance – Outer Contact	3.0 milliOhms maximum initial @ 12 amperes
Dielectric Withstanding Voltage	1000 Vac RMS between contacts, 500 Vac RMS between contacts and shell
Temperature Range	-65°C to +200°C
Durability	500 mating cycles
Corrosion (salt Fog)	EIA-364-26, condition B, 48 hours
Vibration	EIA-364-28, condition VI, letter J, 43g's
Shock	EIA-364-27, condition D, 300g's


CONTACTS AND TOOLS

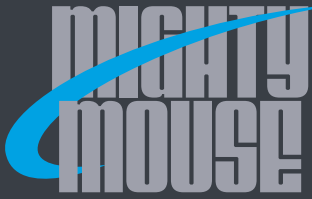


SERIES 80 Mighty Mouse Connectors Size #8 100 Ohm Quadrax Contacts



SIZE #8 QUADRAX CONTACTS

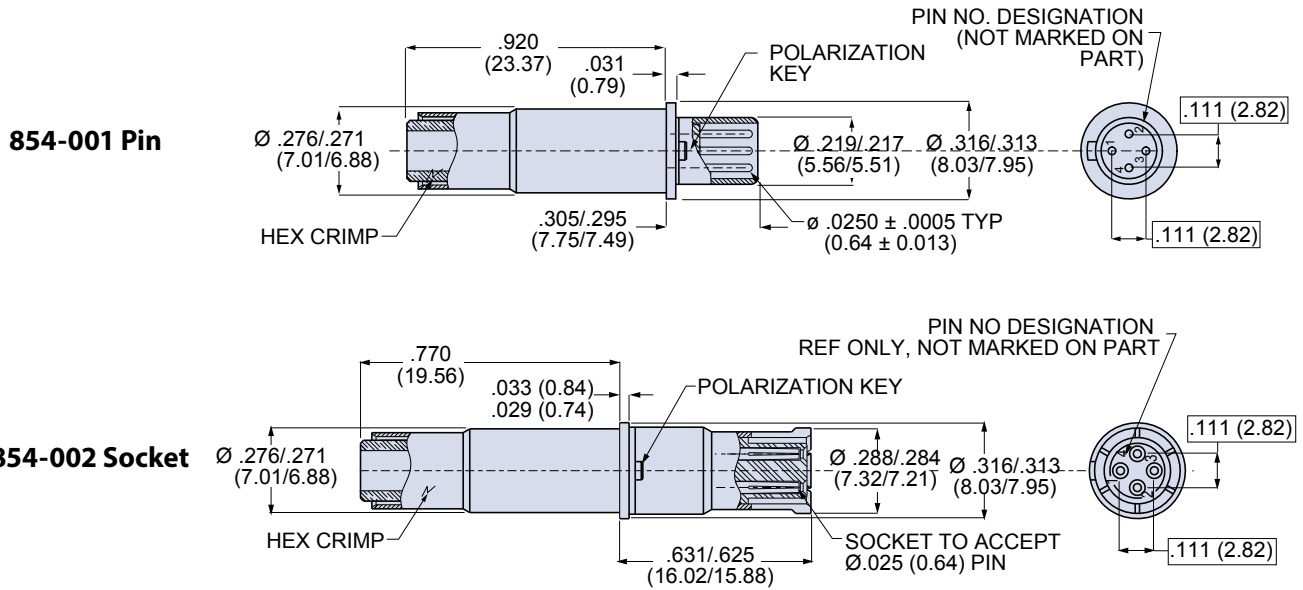

Arinc 664 Star Quad Cable

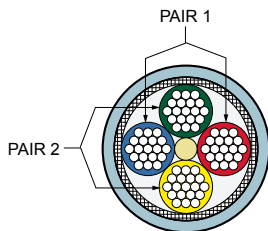

About Quadrax Contacts and Star Quad Cable


Quadrax contacts are size 8 multi-pin contacts with four signal pins and an outer contact body. These contacts are used for ARINC 664 100BASE-T Ethernet. Each quadrax contact yields one Ethernet port. The outer contact body provides a 360-degree EMI shield around the signal contacts. Star quad cables have four parallel wires uniformly twisted around a center filler. These 100 Ohm high performance 100BASE-T cables are designed for use in aircraft systems. The cable has two shields—a flat tinned copper braid inner shield and an outer tinned copper overbraid. The FEP jacket meets FAA flammability requirements.


Sealing Boot

Optional sealing boot is recommended. Slide boot onto wire before terminating contact. After contact is installed in connector, slide boot forward into connector grommet to seal the contact cavity. "F" suffix on contact part number specifies contact supplied with 859-042-02 sealing boot.



Dimensions		
Wire Dia. (in.)	Wire Dia. (mm.)	Part Number
.090 - .130	2.3 - 3.3	859-042-01
.130 - .170	3.3 - 4.3	859-042-02
.170 - .205	4.3 - 5.2	859-042-03





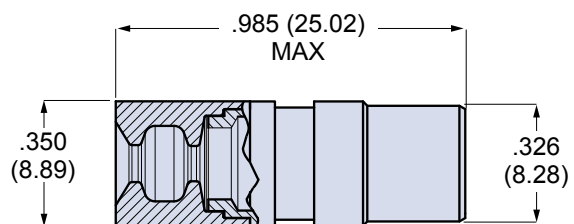


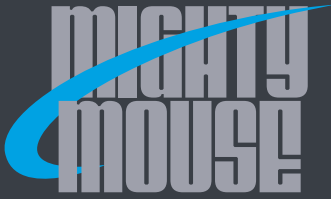

SERIES 80 Mighty Mouse Connectors Size #8 100 Ohm Quadrax Contacts



SIZE #8, 100 OHM QUADRIX CONTACT CABLE

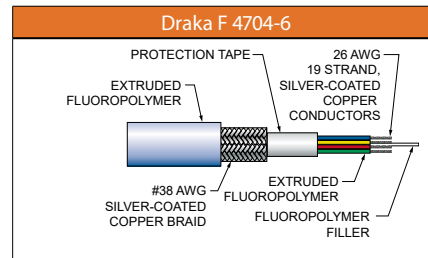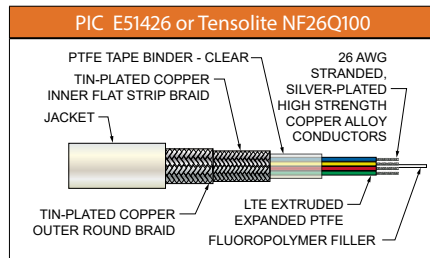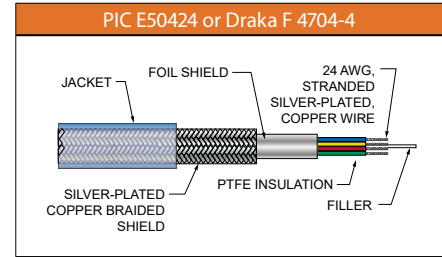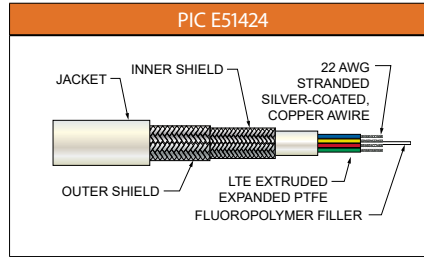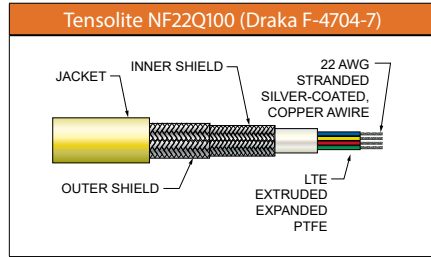

Cable Part Number	Tensolite NF22Q100 (Draka F-4704-7)		PIC E51424		PIC E50424 Draka F 4704-4		PIC E51426 Tensolite NF26Q100		Draka F 4704-6	
Impedance	100		100		100		100		100	
Velocity of Propagation %	80.0		80.0		69.5		70.0		65	
Capacitance (pF/ft)	13.0		13.0		13.0		14.5		--	
Conductor Wire Size	AWG 22		AWG 24		AWG 24		AWG 26		26	
Conductor Material	SCC ¹		Stranded SPCA ²		Stranded SPC ³		Stranded SPCA ²		19 Strand SCC ¹	
Dielectric	PTFE		Fluoropolymer		PTFE		Fluoropolymer		Fluoropolymer	
Inner Shield Coverage	--		90% Braid		100% Foil		90% Braid		--	
Outer Shield Coverage	--		85 Braid		85% Braid		85 Braid		--	
Pair #1	Red, Blue		Red, Blue		Red, Blue		Red, Blue		Red, Blue	
Pair #2	Yellow, Green		Yellow, Green		Yellow, Green		Yellow, Green		Yellow, Green	
Jacket	FEP		ETFE		Fluoropolymer		ETFE		Extruded Fluoropolymer	
Outer Diameter	.190 (4.83)		0.16 (4.06)		.17 (4.32)		0.14 (3.48)		--	
Temperature Rating	-55°C to 200°C		-55°C to 150°C		-55°C to 200°C		-55°C to 150°C		-65°C to 125°C	
Weight	34.5 lbs/1000 ft		2.2 lbs/100 ft		2.7 lbs/100 ft		1.8 lbs/100 ft		--	
Max. Attenuation	Freq. (MHz)	dB/100 ft	Freq. (MHz)	dB/100 ft	Freq. (MHz)	dB/100 ft	Freq. (MHz)	dB/100 ft	Freq. (MHz)	dB/100 ft
			10	2.3/2.7	10	2.2/3.0	10	2.8/3.2	1	.092
	100	6.4/7.3	100	8.0/9.2	100	7.1/8.2	100	9.6/11.0	4	1.83
									10	2.75
									16	3.66
									20	4.27
								62.5	7.62	
								100	9.15	

1. SCC = silver-coated copper 2. SPCA = silver-plated copper alloy 3. SPC = silver-plated copper

CONTACTS AND TOOLS