




# SERIES 701 SeaKing™ Junior High-Density Dry-Mate Connectors



## Overmolded cables and pigtail assemblies

### SEAKING™ JUNIOR POINT-TO-POINT PLUG-TO-PLUG OVERMOLDED CABLE

| SeaKing Junior - How To Order CCP Cable Assemblies |   |             |           |          |          |           |  |
|--|---|-------------|-----------|----------|----------|-----------|--|
| <b>Sample Part Number</b>                          | <b>7071-0067</b>  | <b>9-35</b> | <b>Z1</b> | <b>S</b> | <b>N</b> | <b>36</b> |  |
| <b>Series</b>                                      | 7071-0067 = SeaKing Junior Cable Assembly                                 |             |           |          |          |           |  |
| <b>Insert Arrangement</b>                          | See insert arrangement tables pages 23–28                                 |             |           |          |          |           |  |
| <b>Material / Finish</b>                           | Z1 = Stainless Steel Body and Marine Bronze Coupling Nut<br>TC = Titanium |             |           |          |          |           |  |
| <b>Contact Style</b>                               | S = Socket  |             |           |          |          |           |  |
| <b>Polarization</b>                                | N = Normal, A, B, C (see Polarization Table, page 22)                     |             |           |          |          |           |  |
| <b>Cable Length</b>                                | Length = in inches; ie 36 = 36 inches                                     |             |           |          |          |           |  |

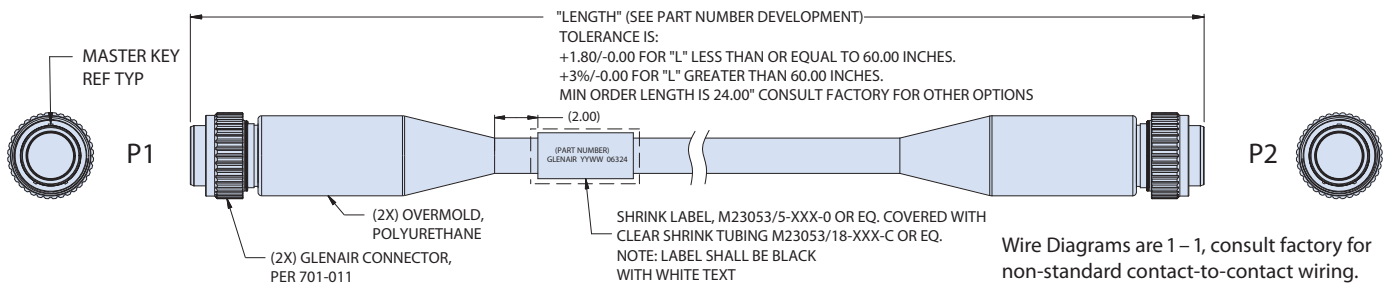

### SEAKING™ JUNIOR SINGLE-ENDED RECEPTACLE ASSEMBLY

| SeaKing Junior - How To Order FCR and BCR Receptacle Assemblies |  |          |             |           |          |          |           |
|---|--|----------|-------------|-----------|----------|----------|-----------|
| <b>Sample Part Number</b>                                       | <b>7071-0068</b>   | <b>1</b> | <b>9-35</b> | <b>Z1</b> | <b>P</b> | <b>N</b> | <b>36</b> |
| <b>Series</b>   | 7071-0068 = SeaKing Junior Cable Assembly  |          |             |           |          |          |           |
| <b>Receptacle Style</b>   | 1 = Flange Connector Receptacle (701-016)<br>2 = Bulkhead Connector Receptacle (701-017) |          |             |           |          |          |           |
| <b>Insert Arrangement</b>                                       | See insert arrangement tables pages 23–28  |          |             |           |          |          |           |
| <b>Material / Finish</b>  | Z1 = Stainless Steel Body and Marine Bronze Coupling Nut<br>TC = Titanium                |          |             |           |          |          |           |
| <b>Contact Style</b>  | P = Pin  |          |             |           |          |          |           |
| <b>Polarization</b>   | N = Normal, A, B, C (see Polarization Table, page 22)                                    |          |             |           |          |          |           |
| <b>Cable Length</b>   | Length = in inches; ie 36 = 36 inches  |          |             |           |          |          |           |

