791-002
Cable Receptacle with Banding Platform

- Crimp, rear-release
- Pin contacts
- Banding platform

Banding platform. 791-002 cable receptacle has integral platform for attaching cable braid with ***Band-Master ATS®*** banding strap, sold separately. Snap-in, rear-release M39029-type crimp contacts are packaged with connector. High-density size 23 contacts are on .075 inch (1.9mm) centers and accept AWG 22-28 wire. Size 16 and size 12 cavities accept power contacts (supplied with connector) or coaxial RF contacts (ordered separately). Rear grommet and interfacial seal provide environmental protection.

- Aerospace-grade ultraminiature connector with rugged scoop-proof duo-lobe shell
- Environmental
- 42 layouts with up to 153 contacts
- M39029-type crimp contacts

INSERT ARRANGEMENTS

FULL COMPLEMENT OF CONTACTS	#8, #12 OR #16 CONTACTS PURCHASED SEPARATELY	No. of Contacts #23	#16	#12	#8
A-5		5			
B-2P2	B-2W2		2		
B-9		9			
C-13		13			
D-15		15			
D-3P3	D-3W3		3		
D-7P2	D-7W2	5	2		
E-11P2	E-11W2	9	2		
E-19		19			
E-7P3	E-7W3	4	3		
F-14P3	F-14W3	11	3		
F-15P2	F-15W2	13	2		
F-23		23			
F-5P5	F-5W5		5		
G-13P2	G-13W2	11		2	
G-21P1	G-21W1	20		1	
G-3P3	G-3W3			3	
G-33		33			
H-10P4	H-10W4	6		4	
H-29P7	H-29W7	22	7		
H-36P2	H-36W2	34		2	
H-51P1	H-51W1	50		1	
H-54P2	H-54W2	52	2		
H-5P5	H-5W5			5	
H-66		66			
J-17P4	J-17W4	13	4		
J-25P2	J-25W2	23	2		
J-33		33			
J-7P7	J-7W7		7		
K-27P4	K-27W4	23	4		
K-35P2	K-35W2	33	2		
K-43		43			
K-9P9	K-9W9		9		
L-22P4	L-22W4	18		4	
L-48P2	L-48W2	46		2	
L-6P6	L-6W6			6	
L-78		78			
M-17P17	M-17W17		17		
M-102		102			
M-4P4	M-4W4				4
N-13P13	N-13W13			13	
N-153		153			

HOW TO ORDER

Sample Part Number	791-002P	H-66	M	E	S	B

Basic Part Number
791-002P Cable Receptacle, Pin Contacts, with Banding Platform

Shell Size-Insert Arr.
See "***Insert Arrangements***" Table

Shell Finish
- **M** Electroless Nickel
- **MT** Nickel / PTFE
- **N** Olive Drab Cadmium
- **TZ** Tin-Zinc
- **ZR** Black Zinc-Nickel

EMI Spring
- **E** EMI Spring
- **N** No EMI Spring

Hardware Option *Table 1*
- **K** Extended Jackscrews *Slot head male*
- **L** Jackscrews *Socket head male*
- **N** Thru-Hole *No Hardware*
- **P** Female Jackposts
- **S** Screwlocks *Socket head male*
- **T** Extended Screwlocks *Slot head male*

Polarization Key Option
Enter Letter Designator for Position **A**, **B**, **C**, **D**, **E**, or **F** per Mod Code 555 (see page B-8 for details) **Omit** for none

TABLE 1 HARDWARE OPTIONS

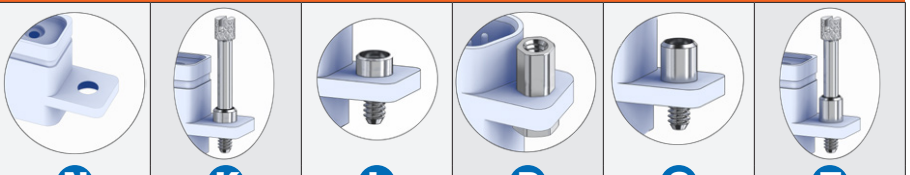

N No Hardware Thru Mounting Holes
K Extended Jackscrew Slot Head
L Jackscrew Socket Head
P Female Jackpost With Nut and Lockwasher
S Screwlock Socket Head
T Extended Screwlock Slot Head

Screwlocks allow connector to be plugged in before the screws are tightened. Jackscrews must be tightened in order to mate connector.

RATINGS

- **Voltage (DWV):** size 23 contacts 750 VAC, Size 8, 12 and 16: 1800 VAC
- **Current:** #23 5A, #16 13A, #12 23A, #8 46A
- **Operating temperature:** -65 to +150 °C
- **Durability:** 500 mating cycles
- **Shock:** 300 g
- **Vibration:** 20 g random
- **Altitude immersion:** 75,000 feet
- **Ingress protection:** IP67

CONSTRUCTION

- **Contacts:** Copper alloy, gold over nickel finish
- **Shell:** Aluminum
- **Insulators:** High performance thermoplastic
- **Ground spring:** BeCu, electroless nickel plated
- **Wire grommet, face seal:** Fluorosilicone/silicone blend
- **Contact retaining clip:** BeCu, unplated
- **Hardware:** Stainless steel

© 2026 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 79 Connectors
Dimensions in Inches (millimeters) are subject to change without notice.

791-002
Cable Receptacle with Banding Platform

- Crimp, rear-release
- Pin contacts
- Banding platform

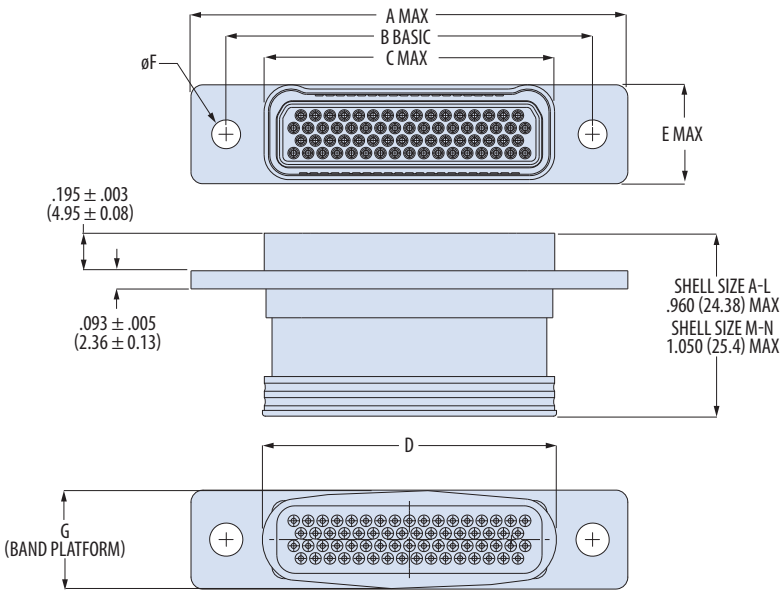

Shell Size	A Max		B ± .005 (0.1)		C Max		D ± .010 (0.3)		E Max		ø F ± .005 (0.1)		G ± .010 (0.3)	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
A	1.040	26.4	.750	19.1	.490	12.4	.440	11.2	.415	10.5	.150	3.8	.360	9.1
B	1.190	30.2	.900	22.9	.640	16.3	.590	15.0	.415	10.5	.150	3.8	.370	9.4
C	1.340	34.0	1.050	26.7	.790	20.1	.740	18.8	.415	10.5	.150	3.8	.390	9.9
D	1.415	35.9	1.125	28.6	.865	22.0	.840	21.3	.415	10.5	.150	3.8	.400	10.2
E	1.565	39.8	1.275	32.4	1.015	25.8	.990	25.1	.415	10.5	.150	3.8	.400	10.2
F	1.715	43.6	1.425	36.2	1.165	29.6	1.140	29.0	.415	10.5	.150	3.8	.410	10.4
G	1.678	42.6	1.388	35.3	1.127	28.6	1.130	28.7	.500	12.7	.150	3.8	.490	12.4
H	2.275	57.8	1.900	48.3	1.516	38.5	1.525	38.7	.520	13.2	.173	4.4	.510	13.0
J	2.090	53.1	1.800	45.7	1.540	39.1	1.490	37.8	.415	10.5	.150	3.8	.410	10.4
K	2.465	62.6	2.175	55.2	1.915	48.6	1.890	48.0	.415	10.5	.150	3.8	.430	10.9
L	2.511	63.8	2.136	54.3	1.752	44.5	1.760	44.7	.520	13.2	.173	4.4	.520	13.2
M	2.580	65.5	2.200	55.9	1.815	46.1	1.825	46.4	.635	16.1	.198	5.0	.590	15.0
N	3.040	77.2	2.600	66.0	2.210	56.1	2.220	56.4	.722	18.3	.248	6.3	.680	17.3

CRIMP CONTACTS AND TOOLS

Contacts are bulk packed with connector. Spare contacts are not included with connector and are ordered separately. See "Contacts and Tools" section for additional information.

Contact Size	Pin Contact Part No.	AWG Wire Size	Installing and Removal Tool	Crimp Tools		
				Tool	Positioner	Die Assembly
23	809-001	22 – 28	809-088	809-015 (M22520/2-01)	809-005 (K1461)	—
16	809-110	16 – 20	809-131 (M81969/14-03)	809-136 (M22520/1-01)	809-137 (M22520/1-04)	—
12	809-112	12 – 14	809-132 (M81969/14-04)	809-136 (M22520/1-01)	809-137 (M22520/1-04)	—
8	850-014F	8	859-049 (M81969/14-12)	859-025 (M22520/23-01)	859-046 (WA23-395L)	859-026 (M22520/23-02)

Application Note
Panel Mounting
For panel mounting, specify connector with Hardware Option N (thru-holes). Use rear panel mount jackpost 799-117. See page **F-18** for jackpost ordering information, page **F-19** for panel cutout dimensions.

Application Note
Polarization Key Positions
See Mod Code 555 pg. B-8 for details



Plug Receptacle

HARDWARE DIMENSIONS

Shell Size	Thread Size
A – G, J, K	#4-40
H, L	#6-32
M	#8-32
N	#10-32



P
Female Jackpost with Hex Nut and Lockwasher



K T
Extended Jackscrew and Screwlock



L
Low Profile Jackscrew Socket Head



S
Low Profile Screwlock Socket Head

SHIELD BAND

Use Micro Band strap to terminate cable braid directly to connector. Stainless steel band strap provides fast, cost-effective and highly reliable termination of braided metallic shielding. *Band is sold separately.*

Micro Band Strap

Tool 601-101

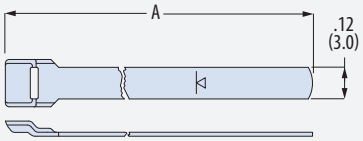

A Length		Fits up to Dia.		Band Strap Part Number	
in	mm	in	mm	Flat	Pre-coiled
8	203	.88	22.4	601-060	601-061
14	356	1.88	47.7	601-064	601-065

© 2026 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 79 Connectors
Dimensions in Inches (millimeters) are subject to change without notice.

Insert Arrangements

INSERT ARRANGEMENTS

Insert Arr.	No. of Contacts #23	#16	#12	#8
A-5	5			
B-2P2		2		
B-9	9			
C-13	13			
D-15	15			
D-3P3		3		
D-7P2	5	2		
E-11P2	9	2		
E-19	19			
E-7P3	4	3		
F-14P3	11	3		
F-15P2	13	2		
F-23	23			
F-5P5		5		
G-13P2	11		2	
G-21P1	20		1	
G-3P3			3	
G-33	33			
H-10P4	6		4	
H-29P7	22	7		
H-36P2	34		2	
H-51P1	50		1	
H-54P2	52	2		
H-5P5			5	
H-66	66			
J-17P4	13	4		
J-25P2	23	2		
J-33	33			
J-7P7		7		
K-27P4	23	4		
K-35P2	33	2		
K-43	43			
K-9P9		9		
L-22P4	18		4	
L-48P2	46		2	
L-6P6			6	
L-78	78			
M-17P17		17		
M-102	102			
M-4P4				4
N-13P13			13	
N-153	153			

⚠ Cavity Numbers

Cavity numbers shown are for mating face of receptacle (pin) connector. Plug (socket) numbers are reversed.

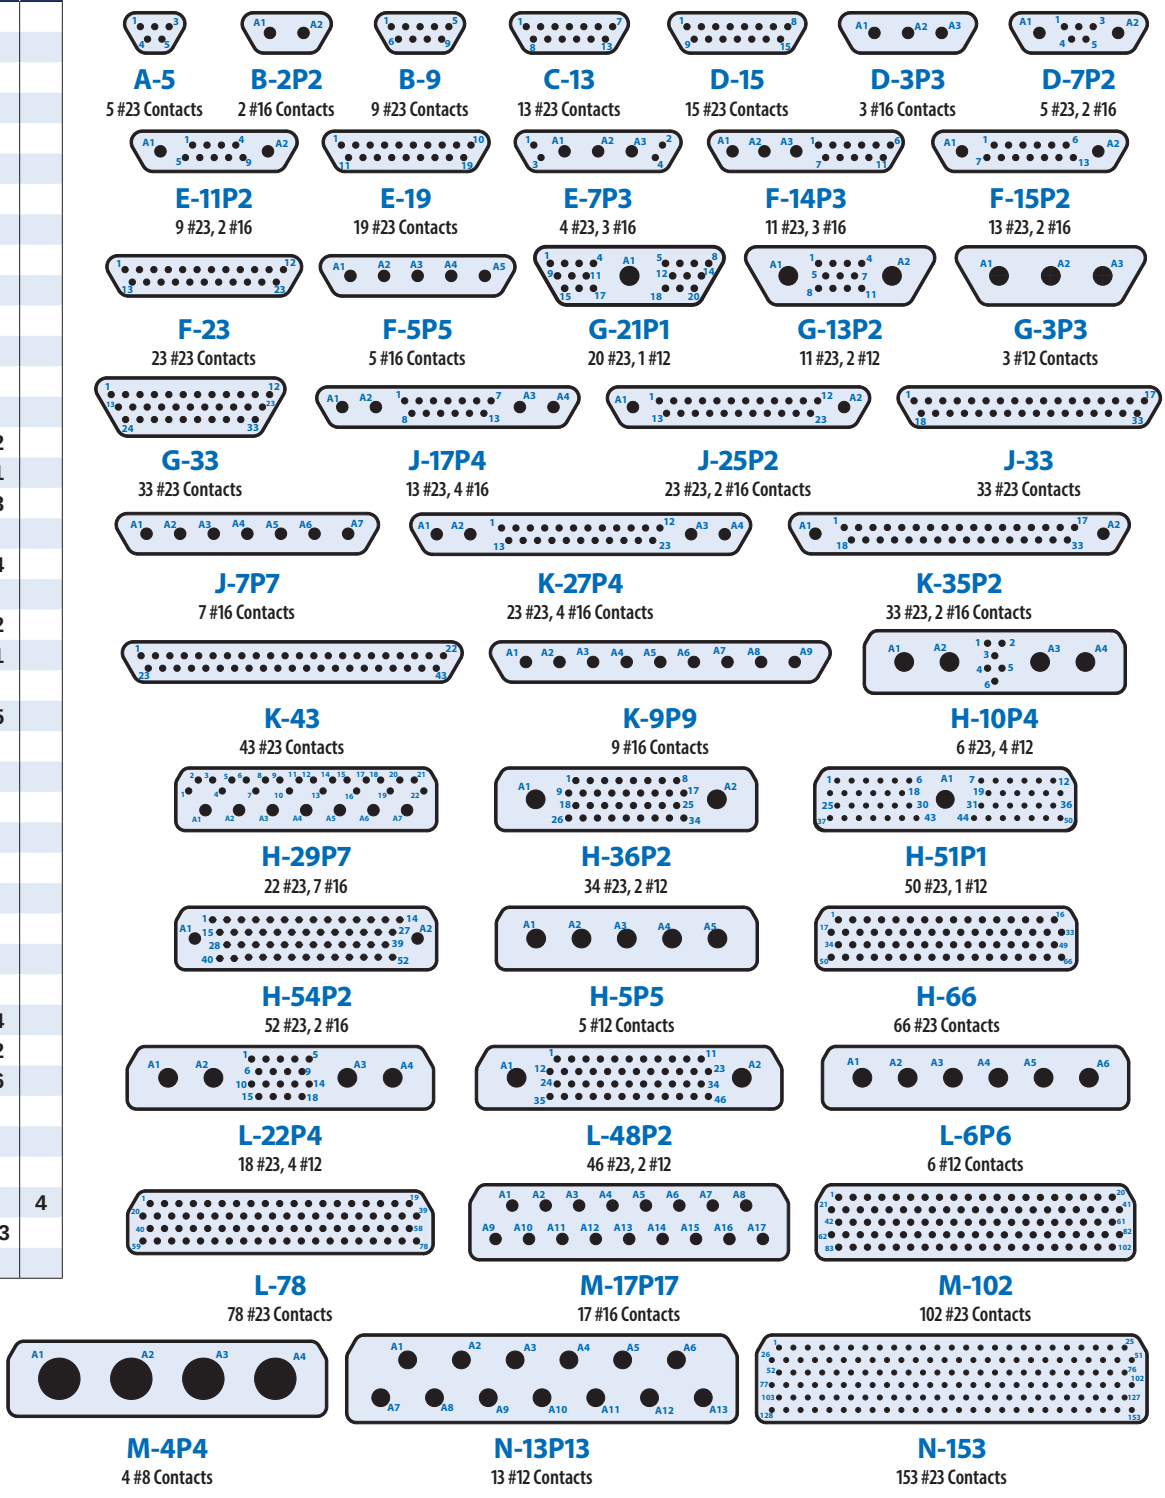

A-5
5 #23 Contacts

B-2P2
2 #16 Contacts

B-9
9 #23 Contacts

C-13
13 #23 Contacts

D-15
15 #23 Contacts

D-3P3
3 #16 Contacts

D-7P2
5 #23, 2 #16

E-11P2
9 #23, 2 #16

E-19
19 #23 Contacts

E-7P3
4 #23, 3 #16

F-14P3
11 #23, 3 #16

F-15P2
13 #23, 2 #16

F-23
23 #23 Contacts

F-5P5
5 #16 Contacts

G-21P1
20 #23, 1 #12

G-13P2
11 #23, 2 #12

G-3P3
3 #12 Contacts

G-33
33 #23 Contacts

J-17P4
13 #23, 4 #16

J-25P2
23 #23, 2 #16 Contacts

J-33
33 #23 Contacts

J-7P7
7 #16 Contacts

K-27P4
23 #23, 4 #16 Contacts

K-35P2
33 #23, 2 #16 Contacts

K-43
43 #23 Contacts

K-9P9
9 #16 Contacts

H-10P4
6 #23, 4 #12

H-29P7
22 #23, 7 #16

H-36P2
34 #23, 2 #12

H-51P1
50 #23, 1 #12

H-54P2
52 #23, 2 #16

H-5P5
5 #12 Contacts

H-66
66 #23 Contacts

L-22P4
18 #23, 4 #12

L-48P2
46 #23, 2 #12

L-6P6
6 #12 Contacts

L-78
78 #23 Contacts

M-17P17
17 #16 Contacts

M-102
102 #23 Contacts

M-4P4
4 #8 Contacts

N-13P13
13 #12 Contacts

N-153
153 #23 Contacts

© 2026 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 79 Connectors
Dimensions in Inches (millimeters) are subject to change without notice.

Series 791 Material and Finish Options

The Series 791 Scoop-Proof connector is available in five preferred finishes: electroless nickel, nickel-PTFE, tin-zinc, cadmium, and zinc-nickel.

Additional material and finish options are available. Replace the preferred plating code with the alternate code from the table below.

TIN-ZINC PLATING

The United States Department of Defense (DOD) has mandated the elimination of cadmium from DOD weapons systems because of toxicity concerns. The European Union has also restricted the use of cadmium on electronics equipment (RoHS). Tin-Zinc is a RoHS cadmium-free sacrificial finish that offers high conductivity and shielding performance, corrosion resistance, solderability, and proven compatibility with legacy cadmium and zinc-nickel finishes. Tin-Zinc is DLA-qualified and RoHS compliant.

SERIES 791 SHELL FINISH OPTIONS

	Electroless Nickel	Nickel-PTFE	Tin-Zinc	Olive Drab Cadmium	Black Zinc-Nickel
Glenair Code	M	MT	TZ	N	ZR
Corrosion Resistance	Fair	Excellent	Excellent	Excellent	Excellent
Salt Spray Hours	48	500	500	500	500
Conductivity	Excellent	Excellent	Very Good	Very Good	Very Good
RoHS Compliant[1]	Yes	Yes	Yes	No	Yes

[1] Does not contain cadmium or hexavalent chromium. Meets EU requirements.

ALTERNATE SHELL MATERIAL AND FINISH CODES

Code	Shell Material	Shell Finish	Finish Specification	Salt Spray Hrs.	Electrical Conductivity	RoHS[1]
C	Alum	Anodize, Black	MIL-PRF-8625	48	Non-Conductive	✓
E[2]	Alum	Chem Film, Gold	MIL-DTL-5541	168	Conductive	
J	Alum	Cadmium, Yellow	AMS-QQ-P-416	500	Conductive	
Z1	SST	Passivate	AMS2700	500	Conductive	✓
Z2	Alum	Gold	MIL-DTL-45204	48	Conductive	✓
ZM	SST	Electroless Nickel	AMS-C-26074	500	Conductive	✓
ZMT	SST	Nickel-PTFE	AMS2454	1000	Conductive	✓
ZW	SST	Cadmium, Olive Drab	AMS-QQ-P-416	500	Conductive	
ZZR	SST	Zinc-Nickel, Black	ASTM B841	500	Conductive	✓

[1] Does not contain cadmium or hexavalent chromium. Meets EU requirements.
[2] Maximum temperature = +125°C

© 2026 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 79 Connectors
Dimensions in Inches (millimeters) are subject to change without notice.

Specifications

Construction

Contacts	Copper alloy, gold over nickel finish
Hood, socket contact	Stainless steel, passivated
Clip, contact retaining	Beryllium copper
Clip, insert retaining	Beryllium copper
Insulators	High performance thermoplastic
Grommet and face seal	Fluorosilicone/silicone blend
Shell	Aluminum
O-ring	Fluorosilicone
EMI spring	Beryllium copper, electroless nickel plated
EMI shroud (90° PCB)	Aluminum
Encapsulant (PCB)	Epoxy
Hardware	Stainless steel, passivated

Ratings

Voltage (DWV)	Size 23 contacts: 750 VAC Size 8, 12 and 16 contacts: 1800 VAC
Current Rating	See table below
Operating Temperature	-65 to +150 °C
Ingress Protection	IP67
Durability	500 mating cycles

Contact Size	Current (A)
#23	5
#16	13
#12	23
#8	46

Product Specifications

Description	Requirement	Procedure
Contact Resistance	SAE AS39029 Table 5	EIA-364-06
Low Level Contact Resistance	SAE AS39029 Table 4	EIA-364-23
Insulation Resistance	5000 megohms minimum	EIA-364-21
Dielectric Withstanding Voltage	#23 contacts 750 volts, #8, 12 & 16 contacts 1800 volts	EIA-364-20
Current Rating	#23: 5A, #16: 13A, #12: 23A, #8: 46A	EIA-364-70 Method 1
Shell-to-shell Resistance	2.5 millivolt drop maximum (connector with EMI spring)	EIA-364-83
Shielding Effectiveness	100 – 1000MHz: >50 dB, 1 – 4GHz: >41dB, 4 – 10GHz: >35 dB	EIA-364-66
Ingress Protection	IP67 rating	IEC-60529
Vibration, Sine	20 g	EIA-364-28 Test Condition IV
Vibration, Random	16.91 g rms	EIA-364-28 Test Condition V Letter E
Mechanical Shock	300 g	EIA-364-27 Condition D
Thermal Shock	-65 to +150 °C	EIA-364-32 Test Condition IV
Humidity	10 Day, +25 to +65° C	EIA-364-31 Method IV, Step 7b vibration deleted
Mechanical Durability	500 mating cycles	EIA-364-09
Salt Spray	Plating code M: 48 hours, MT, ZR, N, TZ: 500 hours	EIA-364-26
Solderability, PC Tail Contacts	95% solder coverage. Smooth, bright and even finish.	EIA-364-52 Category 3, 8 hours steam aging
Resistance To Soldering Heat	260° C, 10 seconds	EIA-364-56
Fluid Immersion	No damage from immersion in various fuels and oils.	EIA-364-10
Altitude Immersion	75,000 feet	EIA-364-03
Contact Retention	MIL-DTL-38999 Table XVIII	EIA-364-29
Contact Separation Force	SAE AS39029 Table 9	EIA-364-37
Magnetic Permeability	2 µ maximum.	EIA-364-54

© 2026 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 79 Connectors
Dimensions in Inches (millimeters) are subject to change without notice.

Panel Cutouts, 791 Series, Rear Panel Jackpost Mounting

PANEL CUTOUT FOR SERIES 791 CABLE CONNECTORS AND PCB CONNECTORS

This panel cutout fits Series 791 cable connectors and PCB connectors with rear panel mount female jackposts. ***Install PCB connector jackposts with threadlocking compound.***

This panel cutout is compatible with:

Cable Connectors

791-001
791-002
791-003
791-004



PCB Connectors

791-013
791-014
791-016
791-032

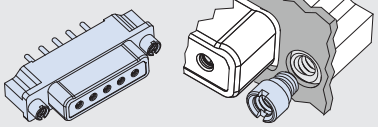

PCB CONNECTOR REAR PANEL JACKPOST R1–R6 PART NO. 799-145

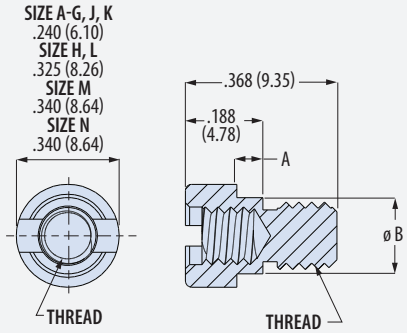

Code	A ± .010 (0.25) in	A ± .010 (0.25) mm	ø B ± .010 (0.25)
R1	.032	0.81	Size A-G, J, K .185 (4.70) Size H, L .226 (5.74) Size M .252 (6.40) Size N .262 (6.65)
R2	.050	1.27	
R3	.062	1.59	
R4	.080	2.03	
R5	.093	2.36	
R6	.125	3.18	

CABLE CONNECTOR REAR PANEL JACKPOST

JACKPOSTS ARE ORDERED SEPARATELY



Shell Size	Part Number
A – L	799-117*
M	799-176*

**See Section F Accessories for complete part numbers and dimensions*

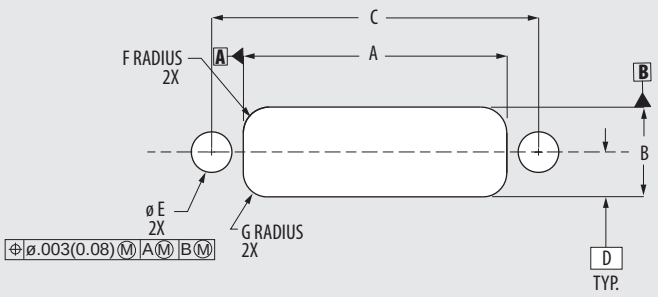

Shell Size	A ± .002 (0.05) in	A ± .002 (0.05) mm	B ± .002 (0.05) in	B ± .002 (0.05) mm	C Basic in	C Basic mm	D in	D mm	ø E ± .002 (0.05) Cable Connector in	ø E ± .002 (0.05) Cable Connector mm	ø E ± .002 (0.05) PCB Connector in	ø E ± .002 (0.05) PCB Connector mm	F ± .002 (0.05) in	F ± .002 (0.05) mm	G ± .002 (0.05) in	G ± .002 (0.05) mm
A	.505	12.83	.418	10.62	.750	19.05	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
B	.655	16.64	.418	10.62	.900	22.86	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
C	.805	20.45	.418	10.62	1.050	26.67	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
D	.880	22.35	.418	10.62	1.125	28.58	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
E	1.030	26.16	.418	10.62	1.275	32.39	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
F	1.180	29.97	.418	10.62	1.425	36.20	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
G	1.142	29.01	.506	12.85	1.388	35.26	.244	6.20	.165	4.19	.190	4.83	.110	2.79	.164	4.17
H	1.531	38.89	.521	13.23	1.900	48.26	.250	6.35	.220	5.59	.236	5.99	.150	3.81	.139	3.53
J	1.555	39.50	.418	10.62	1.800	45.72	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
K	1.930	49.02	.418	10.62	2.175	55.25	.199	5.05	.165	4.19	.190	4.83	.110	2.79	.164	4.17
L	1.767	44.88	.521	13.23	2.136	54.25	.250	6.35	.220	5.59	.236	5.99	.150	3.81	.139	3.53
M	1.850	46.99	.623	15.82	2.200	55.88	.290	7.37	.220	5.59	.262	6.65	.163	4.14	.153	3.89
N	2.244	57.00	.708	17.98	2.600	66.04	.332	8.43	.278	7.06	.280	7.11	.163	4.14	.153	3.89

© 2026 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 79 Connectors
Dimensions in Inches (millimeters) are subject to change without notice.

Series 791 Polarization Keying Option

OPTIONAL POLARIZATION KEYS

To prevent mis-mating of identical shell size and insert arrangement connectors

Series 791 connectors are available with an integral polarizing key. Keyed plug connectors have a raised boss on the shell. Receptacles have corresponding keyway. Ordering is simple—just add the keying position letter designator to the end of the part number.

Note: keyed receptacles will mate with unkeyed plugs. Additional polarization keying positions are available, consult the factory for designators and key locations.

HOW TO ORDER		
Step 1	**Create a Series 791 connector part number:**	**791-003SH-66MP**
Step 2	**Add the keying position letter designator A, B, C, D, E, or F to the part number.**	**791-003SH-66MPB**

MOD-555 KEY LOCATIONS PLUG CONNECTOR MATING FACE
For Shell Sizes A-M

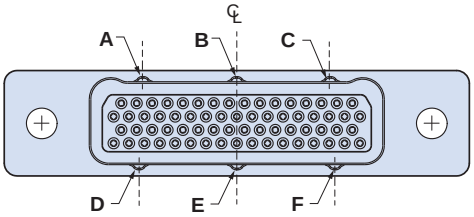

MOD-555 KEY LOCATIONS RECEPTACLE CONNECTOR MATING FACE
For Shell Sizes A-M

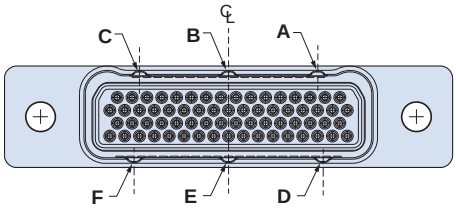

MOD-555 KEY LOCATIONS PLUG CONNECTOR MATING FACE
For Shell Size N

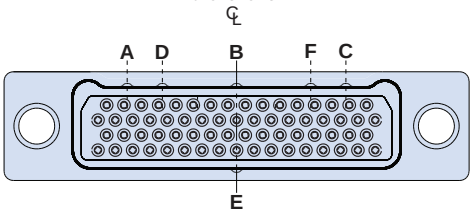

MOD-555 KEY LOCATIONS RECEPTACLE CONNECTOR MATING FACE
For Shell Size N

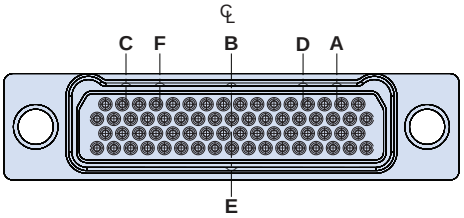

POLARIZING KEY LOCATIONS SHELL SIZES A–M

Shell Size	Key Position Offset From Vertical Centerline											
	Position A		Position B		Position C		Position D		Position E		Position F	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
A	N/A	N/A	.000	0.00	N/A	N/A	.025	0.64	.000	0.00	.025	0.64
B	.090	2.29	.000	0.00	.090	2.29	.050	1.27	.000	0.00	.050	1.27
C	.130	3.30	.000	0.00	.130	3.30	.100	2.54	.000	0.00	.100	2.54
D	.180	4.57	.000	0.00	.180	4.57	.125	3.18	.000	0.00	.125	3.18
E	.200	5.08	.000	0.00	.200	5.08	.150	3.81	.000	0.00	.150	3.81
F	.300	7.62	.000	0.00	.300	7.62	.250	6.35	.000	0.00	.250	6.35
G	.300	7.62	.000	0.00	.300	7.62	.200	5.08	.000	0.00	.200	5.08
H	.450	11.43	.000	0.00	.450	11.43	.500	12.70	.000	0.00	.500	12.70
J	.450	11.43	.000	0.00	.450	11.43	.400	10.16	.000	0.00	.400	10.16
K	.650	16.51	.000	0.00	.650	16.51	.550	13.97	.000	0.00	.550	13.97
L	.550	13.97	.000	0.00	.550	13.97	.600	15.24	.000	0.00	.600	15.24
M	.550	13.97	.000	0.00	.550	13.97	.600	15.24	.000	0.00	.600	15.24
N	.700	17.78	.000	0.00	.700	17.78	.475	12.06	.000	0.00	.475	12.06

© 2026 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • Series 79 Connectors
Dimensions in Inches (millimeters) are subject to change without notice.