

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 792 High-Speed

SERIES
792
High-Speed

792-001

Cable Plug

- ◆ Crimp, rear-release
- ◆ Socket contacts

SERIES 792 HIGH-SPEED



Twinax, quadrax or El Ochito® contacts.

792-001 cable plug has size #8 cavities for snap-in high speed data contacts (purchased separately). Combo arrangements have size #23 contacts (included with connector). Keyed inserts and scoop-proof duo-lobe shell provide precise alignment of contacts for problem-free mating. #8-32 screwlocks or jackposts are 300 series stainless steel. Shell has rear groove for attaching backshell.

- Aerospace-grade rectangular connector with high speed size 8 datalink contacts
- 1-9 data ports
- Rugged duo-lobe aluminum shell
- Environmental

INSERT ARRANGEMENTS			
Thermoplastic Insert	Grounded All-Aluminum	No. of Contacts #8	#23
A-1W1	A-1G1	1	—
A-3W1		1	2
B-23W1		1	22
B-2W2	B-2G2	2	—
B-6W2		2	4
C-24W2		2	22
C-3W3	3G3	3	—
C-9W3		3	6
D-27W3		3	24
D-4W4	D-4G4	4	—
D-12W4		4	8
E-5W5	E-5G5	5	—
E-15W5		5	10
E-45W3		3	42
F-9W9	F-9G9	9	—
F-31W9		9	22

#8 SOCKET CONTACTS

#8 Contacts are not included with connector. See Section E for contact ordering information.



Contact Type	Application	Contact Part Number
Diff. Twinax	77 Ohm 100 Ohm	853-075
Quadrax	100BASE-T, ARINC 664	854-048
Octaxial <i>El Ochito®</i>	Ethernet: 1000BASE-T, 10Gb, 40Gb	858-046 858-042
	USB 3.0	858-048 858-072
	Multi-Gig 100 Ohm: HDMI, DisplayPort, SATA	858-050 858-066
Coaxial	50 Ohm	852-148
	75 Ohm	852-150
Power	#8 AWG	850-158

HOW TO ORDER						
Sample Part Number		792-001S	D-4W4	M	S	B
Basic Part Number		792-001S Cable Plug, Socket Contacts				
Shell Size-Insert Arr.		See "Insert Arrangements" Table				
Shell Finish		M Electroless Nickel MT Nickel / PTFE NF Olive Drab Cadmium TZ Tin-Zinc ZR Black Zinc-Nickel				
Hardware Option <i>Table 1</i>		N Thru-Hole <i>No Hardware</i> K Extended Jackscrews <i>Slot head male</i> L Jackscrews <i>Socket head male</i> P Female Jackposts S Screwlocks <i>Socket head male</i> T Extended Screwlocks <i>Slot head male</i>				
Polarization Key Option		Enter Letter Designator for Position A, B, C, D, E, F, G, H, J, or K per Mod Code 1104 (see page C-8 for details) Omit for none				

TABLE ONE HARDWARE OPTION				
	K	Extended Jackscrew Slot Head		L
	P	Female Jackpost With Nut, Lockwasher		S
	T	Extended Screwlock Slot Head		

Screwlocks allow connector to be plugged in before the screws are tightened. Jackscrews must be tightened in order to mate connector.

RATINGS		CONSTRUCTION	
<ul style="list-style-type: none"> ■ Voltage (DVW): size 23 contacts 750 VAC ■ Current: #23 5A ■ Operating temperature: -65 to +150 °C ■ Durability: 500 mating cycles ■ Shock: 300 g ■ Vibration: 20 g random 		<ul style="list-style-type: none"> ■ Contacts: Copper alloy, gold over nickel finish ■ Shell: Aluminum ■ Insulators: High performance thermoplastic ■ Wire grommet: Fluorosilicone/silicone blend ■ Contact retaining clip: Beryllium copper, unplated ■ Hardware: Stainless steel 	

MICRO-CRIMP RECTANGULAR CONNECTORS


Series 792 High-Speed



792-001

Cable Plug

- ◆ Crimp, rear-release
- ◆ Socket contacts

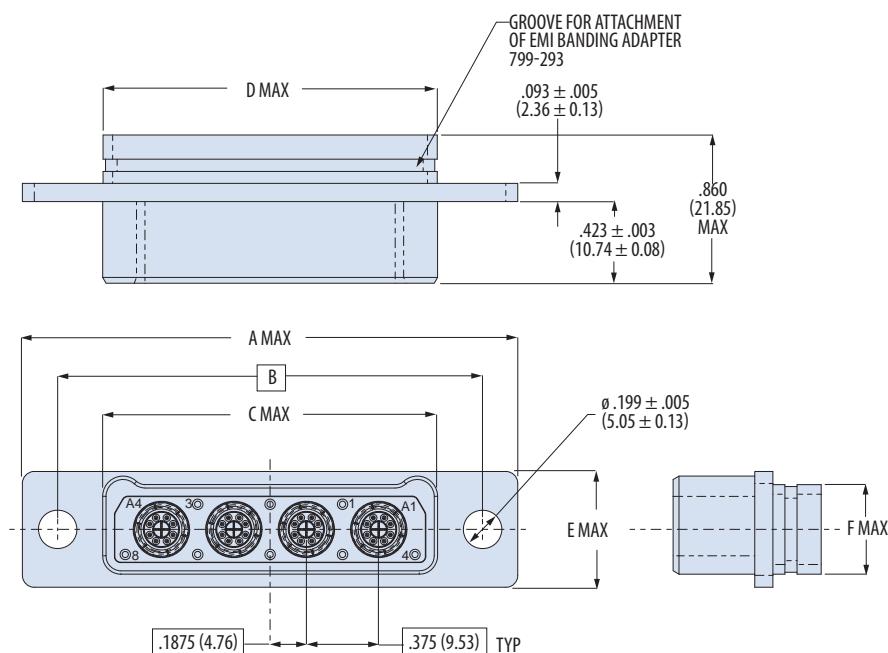

HARDWARE DIMENSIONS	
Shell Size	Thread Size
A - F	#8-32
P	Female Jackpost with Hex Nut and Lockwasher
K T	Extended Jackscrew and Screwlock
L	Low Profile Jackscrew Socket Head
S	Low Profile Screwlock Socket Head

Shell Size	A Max in	A Max mm	B ± .005 (0.1) in	B ± .005 (0.1) mm	C Max in	C Max mm	D Max in	D Max mm	E Max in	E Max mm	F Max in	F Max mm
A	1.455	36.96	1.075	27.31	.615	15.62	.610	15.49	.630	16.00	.469	11.91
B	1.830	46.48	1.450	36.83	.990	25.15	.985	25.02	.630	16.00	.469	11.91
C	2.205	56.01	1.825	46.36	1.365	34.67	1.360	34.54	.630	16.00	.469	11.91
D	2.580	65.53	2.200	55.88	1.740	44.20	1.735	44.07	.630	16.00	.469	11.91
E	2.955	75.06	2.575	65.41	2.115	53.72	2.110	53.59	.630	16.00	.469	11.91
F	2.955	75.06	2.575	65.41	2.115	53.72	2.110	53.59	.990	25.15	.849	21.56

SIZE 23 SOCKET CONTACT

Size #23 contacts are bulk packed with connector. Spare contacts are not included and are ordered separately if required. See "Contacts and Tools" section for additional information.

Contact Part No.	Crimp Tool	Positioner
850-164	809-015 (M22520/2-01)	859-215 (K2105)

INSTALLING AND REMOVAL TOOLS

Insertion/ Removal Tool for Size 23 Contact

809-088


Removal Tool for Size 8 Contact

859-049 (M22520/14-12)



CONTACT POLARIZING KEY LOCATION

Series 792 size 8 contact cavities have a polarizing keyway. This keyway orients and aligns twinax, quadrax and El Ochito® contacts. The connector keyway is rotated 45° from top dead center. This illustration shows the location of the polarizing key and the contact numbers when looking at the mating face of the plug (socket) connector.

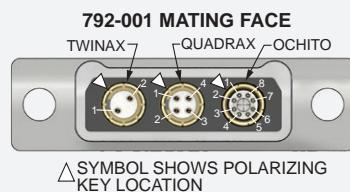

△ SYMBOL SHOWS POLARIZING KEY LOCATION

Application Note

Panel Mounting

For panel mounting, specify connector with Hardware Option N (thru-holes). Use rear panel mount jackpost **799-176**. See page **F-18** for jackpost ordering information and panel cutout dimensions.

Application Note

Polarization Key Positions

See Mod Code 1104 pg. C-8 for details

