

MICRO-CRIMP RECTANGULAR CONNECTORS


Series 792 High-Speed

SERIES
792
High-Speed

792-024

Panel Plug, 90° PC Tails, Quadrax

- ◆ Quadraxial PC tail contacts
- ◆ 90° mounting
- ◆ Socket contacts

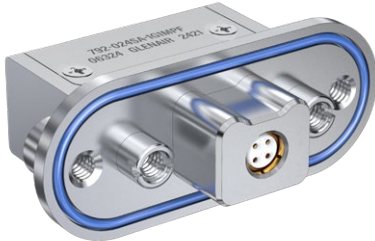

792-024 plug has high-speed quadraxial PC tail socket contacts for 90° thru-hole printed circuit board termination. Contacts are potted with epoxy. Machined aluminum shell has integral standoff and threaded holes for attachment to PC board. Combo arrangements have #23 contacts.

- Aerospace-grade rectangular PCB connector with high speed size 8 quadraxial contacts
- 1–5 data ports
- Rugged duo-lobe aluminum shell
- Environmental

INSERT ARRANGEMENTS

Thermoplastic Insert	Grounded All-Aluminum	No. of Contacts	
		Quadrax	#23
A-1P1	A-1G1	1	–
A-3P1		1	2
B-23P1		1	22
B-2P2	B-2G2	2	–
B-6P2		2	4
C-24P2		2	22
C-3P3	C-3G3	3	–
C-9P3		3	6
D-27P3		3	24
D-4P4	D-4G4	4	–
D-12P4		4	8
E-5P5	E-5G5	5	–
E-15P5		5	10
E-45P3		3	42

RATINGS

- Voltage (DWV): #23 100 VAC, ungrounded quadrax to shell 1800 VAC
- Current: #23 1A
- Operating temperature: -65 to +150 °C
- Durability: 500 mating cycles
- Shock: 300 g
- Vibration: 20 g random

CONSTRUCTION

- #23 Contacts: Copper alloy, gold over nickel finish, stainless steel hood
- Quadrax contact: Copper alloy, gold over nickel finish. Insulators are high performance thermoplastic.
- Shell: Aluminum
- Insulator: High performance thermoplastic
- Encapsulant: Epoxy
- Hardware: Stainless steel, passivated

HOW TO ORDER

Sample Part Number		792-024S	C-3P3	M	P	F	B
Basic Part Number	792-024S	Panel Plug, Straight PC Tails, Quadrax Socket Contacts					
Shell Size-Insert Arr.	See “ <i>Insert Arrangements</i> ” Table						
Shell Finish	M	Electroless Nickel					
	MT	Nickel / PTFE					
	NF	Olive Drab Cadmium					
	TZ	Tin-Zinc					
	ZR	Black Zinc-Nickel					
Hardware Option <i>Table 1</i>	N	No Hardware <i>Threaded holes</i>					
	G	Guide Pins <i>For blind mating</i>					
	P	Female Jackposts					
Panel O-Ring	N	No O-ring					
	C	Conductive Fluorosilicone O-ring					
	F	Fluorosilicone O-ring					
Polarization Key Option	Enter Letter Designator for Position A, B, C, D, E, F, G, H, J, or K per Mod Code 1104 (see page C-8 for details) Omit for none						


TABLE 1 HARDWARE OPTION

N No Hardware Blind tapped holes 10-32 UNF-2B .150 (3.81) Min.	P Female Jackpost Non-removable 8-32 UNC-2B thread	G Guide Pin Non-removable
--	--	---

Application Note

Polarization Key Positions

See Mod Code 1104 pg. C-8 for details



MICRO-CRIMP RECTANGULAR CONNECTORS


Series 792 High-Speed



792-024


Panel Plug, 90° PC Tails, Quadrax

- ◆ Quadrax PC tail contacts
- ◆ 90° mounting
- ◆ Socket contacts

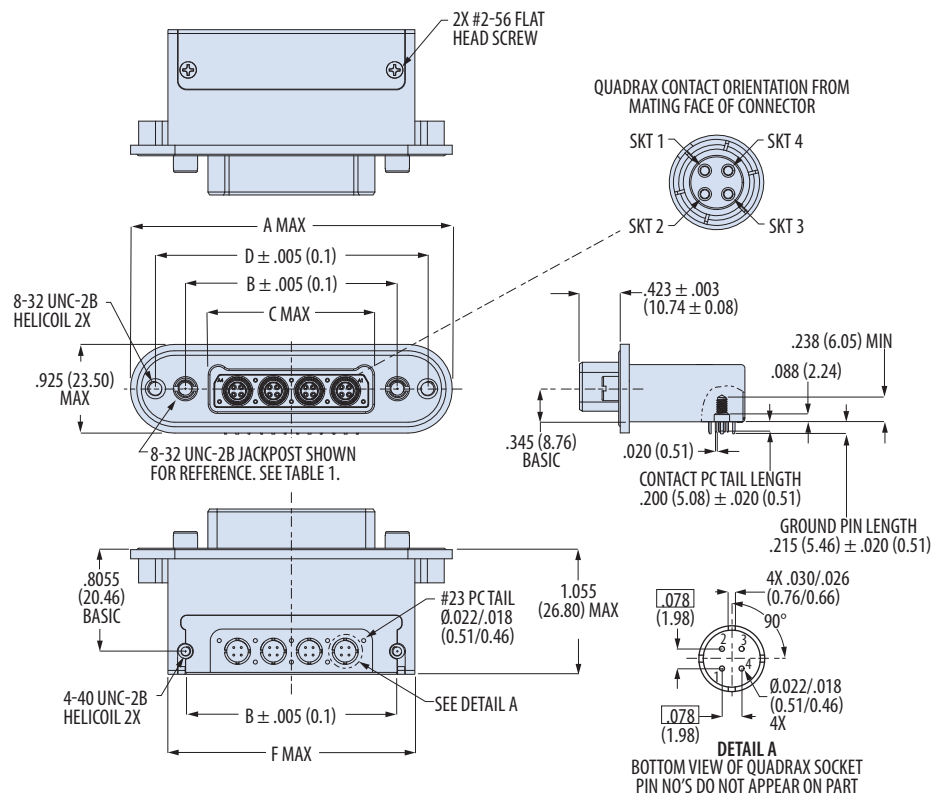

Shell Size	A Max		B ± .005 (0.1)		C Max		D ± .005 (0.1)		E ± .002 (0.05)		F Max	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
A	2.220	56.39	1.075	27.31	.615	15.62	1.699	43.15	.725	18.42	1.455	36.96
B	2.595	65.91	1.450	36.83	.990	25.15	2.074	52.68	1.100	27.94	1.830	46.82
C	2.970	75.44	1.825	46.36	1.365	34.67	2.449	62.20	1.475	37.47	2.205	56.01
D	3.345	84.96	2.200	55.88	1.740	44.20	2.824	71.73	1.850	46.99	2.580	65.53
E	3.720	94.49	2.575	65.41	2.115	53.72	3.199	81.25	2.225	56.52	2.955	75.06

PANEL CUTOUT

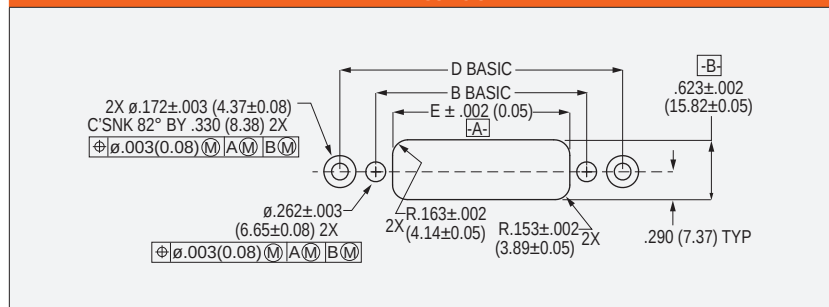

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 792 High-Speed

SERIES™
792
High-Speed



792-024

Panel Plug, 90° PC Tails, Quadrax


- ◆ Quadraxial PC tail contacts
- ◆ 90° mounting
- ◆ Socket contacts

PCB FOOTPRINTS FOR 792-024 CONNECTOR


! PCB hole patterns are shown for the **component mounting side** of the circuit board, looking through the connector.

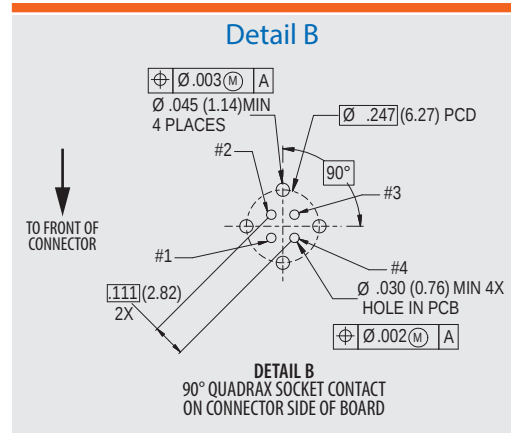


A-1P1 A-1G1

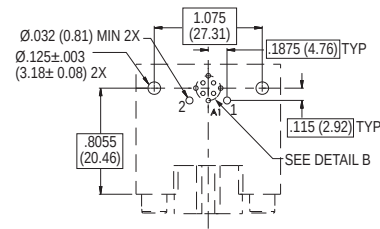


A-3P1

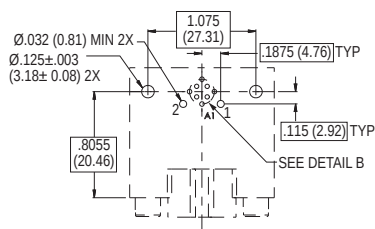


B-2P2 B-2G2

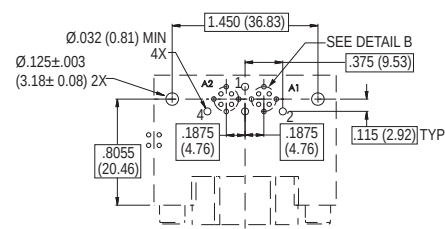

B-6P2

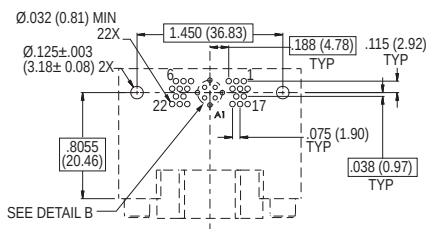

B-23P1

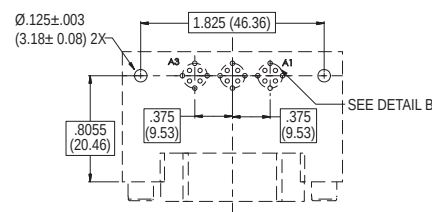

C-3P3 C-3G3

MICRO-CRIMP RECTANGULAR CONNECTORS

Series 792 High-Speed




792-024


Panel Plug, 90° PC Tails, Quadrax

- ◆ Quadrax PC tail contacts
- ◆ 90° mounting
- ◆ Socket contacts


PCB FOOTPRINTS FOR 792-024 CONNECTOR

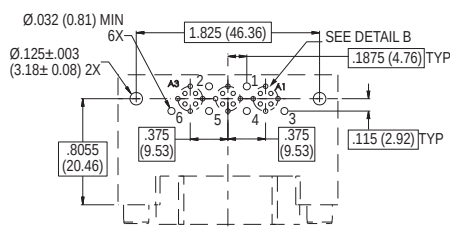


C-9P3

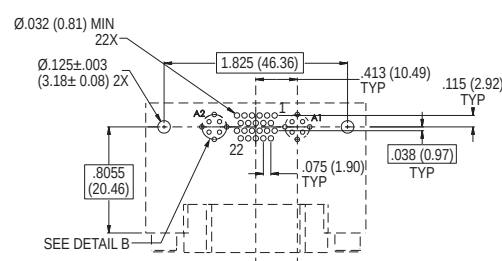


C-24P2

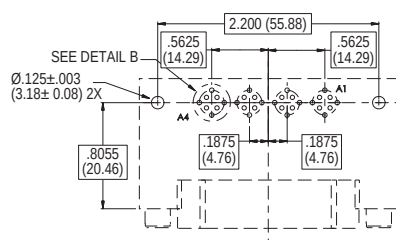


D-4P4 D-4G4

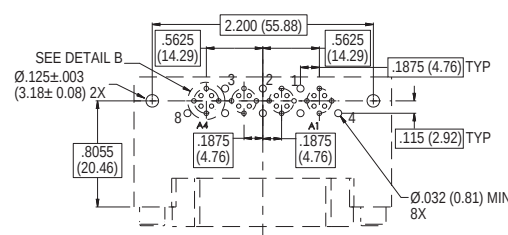


D-12P4

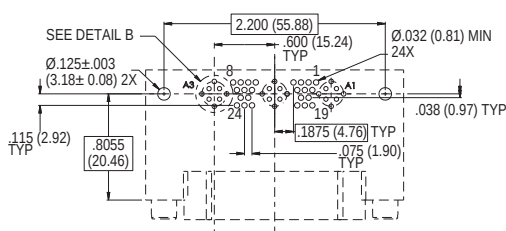


D-27P3

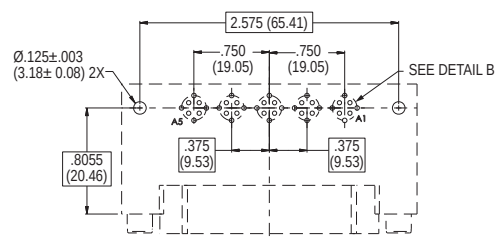

E-5P5 E-5G5

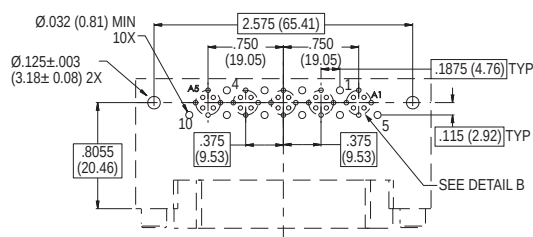

E-15P5

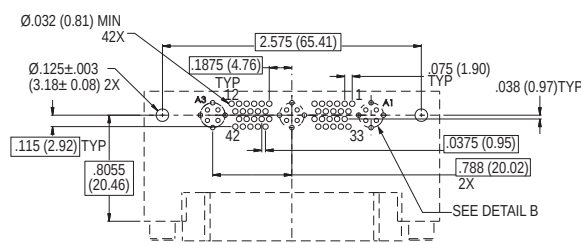

E-45P3