



FA09781 SeaKing Fiber Optic PBOF breakout plug assembly with straight, 45°, and 90° options

NAVSEA / Underwater Fiber Optics

NOTES

- Optical performance: Insertion loss shall be <1.0dB per mated connection when measured @ 1310nm wavelength. Insertion loss can be measured at 1550nm upon customer request.
- Unit pack: 1 EA. In a bag and/or cardboard box, label package IAW Illustration.
- Operate pressure up to 10,000 PSI.
- See drawing 700-001 for connector dimensions, materials, and finishes; see drawing 709-098 for available insert arrangements; see drawing 709-123 for backshell dimensions, materials, and finishes.
- Wiring for each arrangement is one to one.

HOW TO ORDER	
Sample Part Number	FA09781 -MF4 -Z1 -N L 1 S -N -XXXX C
Basic Number	SeaKing Fiber Optic PBOF Breakout Plug Assembly
Shell Size & Insert Arrangements	See Glenair Drawing 709-098
Shell Material	Z1 = 316 Stainless Steel (Consult Factory For Titanium Or Peek Options)
P1 Connector Key Arrangements	(N, A, B, C)
P1 Backshell Style	L = Straight M = 45 Degree N = 90 Degree
P1 Fill Port Option	0 = No 1 = Yes
P1 Swivel/Fixed Option	F = Fixed S = Swivel
P2 Option	F = FC Leads L = LC Leads N = None S = ST Leads
Length In Inches	In inches (See Standard Tolerance Table)
Pressure Cap Option	C = Provided With Pressure Caps N = No Pressure Caps

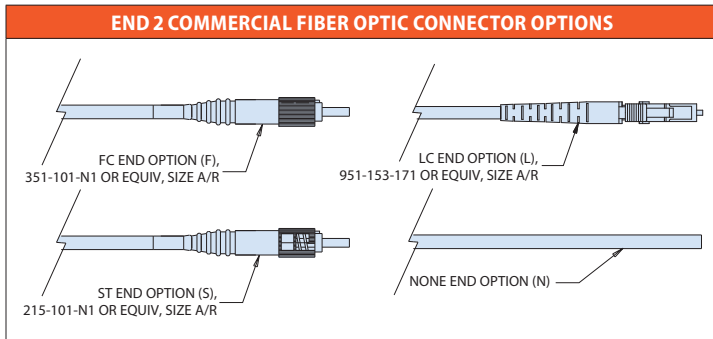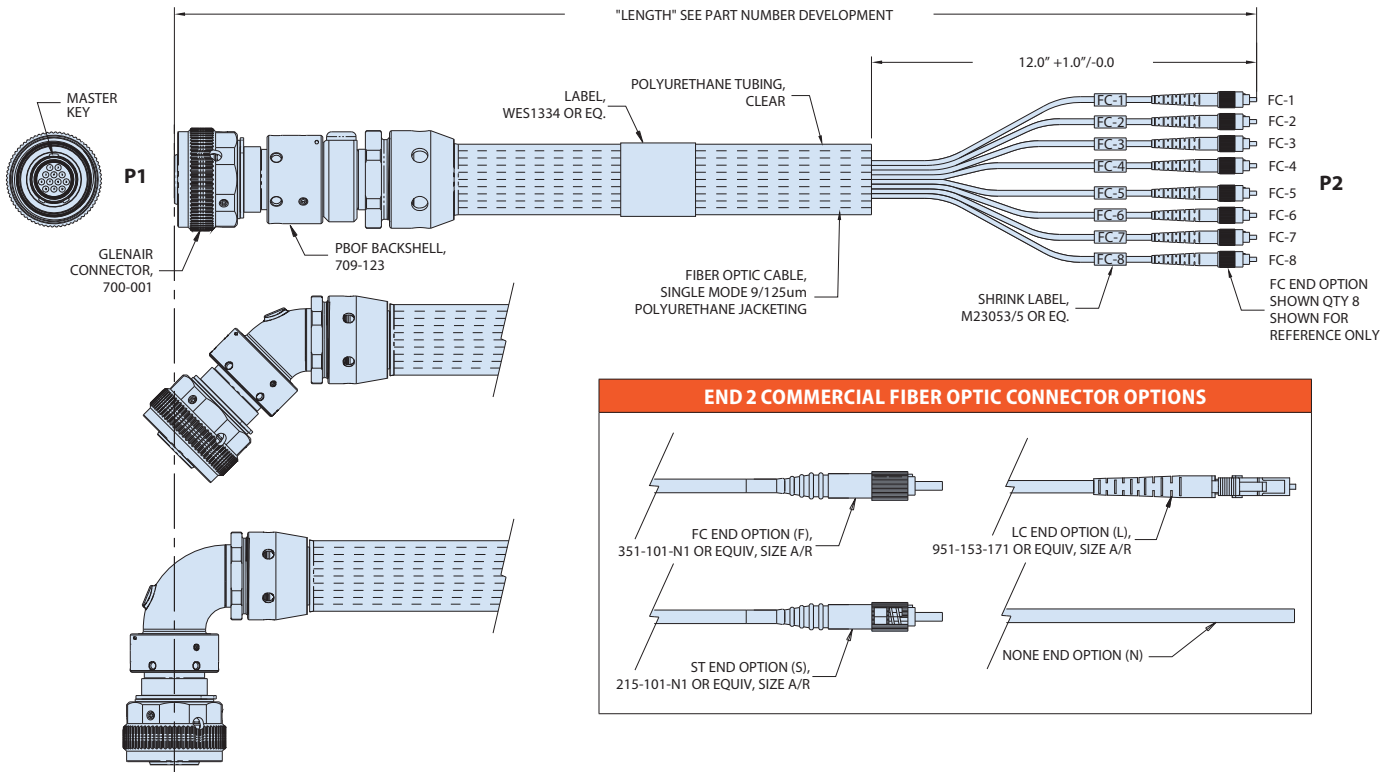

FA09781 SeaKing Fiber Optic

PBOF breakout plug assembly with straight, 45°, and 90° options

FIBER OPTIC-ONLY INSERT ARRANGEMENTS

Shell Size	E	K	L	M	O	P
Insert Arrangement	EF1	KF2	LF3	MF4	OF8	PF12
No. of F/O Termini	1 FO	2 FO	3 FO	4 FO	8 FO	12 FO

Face view of receptacle insert. Contact arrangements of plug inserts are reverse. Insert body 316 SST.

HYBRID COPPER-FIBER INSERT ARRANGEMENTS

Shell Size	K	L	M	O	Q	Q
Insert Arrangement	KH12	LH28	MH24	OH56	QH106	QH316
No. of F/O Termini	1 FO	2 FO	2 FO	5 FO	10 FO	3 FO
No. of Contacts	2 #16	8 #22	4 #16	6 #16	6 #16	16 #16

Face view of receptacle insert. Contact arrangements of plug inserts are reverse. Insert body 316 SST.

ELECTRICAL CONTACT SPECIFICATIONS

Contact Size	#22	#16
Amps	3	10
Wire Gage Accommodation	22	16

All contact arrangements are rated for 600 volts. Wiring 1-to-1.

STANDARD-TOLERANCE

Length	Tolerance
Up to 24 In	+1 In -0
24 Up to 120 In	+3 In -0
120 Up to 600 In	+6 In -0
600 Up to 1200 In	+12 In -0
1200 In and Up	+24 In -0

Alternate Key Positions

	Key Rotation		
	Key Position	A°	B°
	Normal (N)	150°	210°
	A	75°	210°
	B	95°	230°
C	140°	275°	