


# Series 806 Mil-Aero Connectors

## 806-039 Jam-Nut PCB Receptacle Connectors, High-Speed / RF

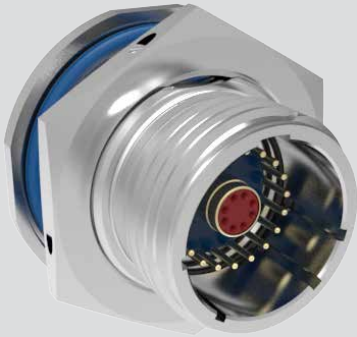

### Features

- Triple-start stub ACME mating thread
- Size 8 El Ochito or RF standard arrangements or hybrid size 8 and 22 arrangements
- Aerospace-grade materials, construction
- Integral PC board standoffs
- Threaded holes for secure attachment to rigid or flex circuits
- Alignment post

### Specifications

- Operating temperature: -65°C to +175°C
- Dielectric withstanding voltage #22HD contacts: 1300 VAC
- #8 contacts: varies; contact factory
- Mating durability: 500 cycles
- Mechanical shock: EIA-364-27, 300g.
- Vibration (sine): MIL-DTL-38999M, 60g.
- Vibration (random) EIA-364-28 Condition VI, Letter J, 43.92 Grms, +200°C
- High Impact shock: MIL-S-901 Grade A
- Humidity: EIA-364-31 Method 4
- Salt spray (dynamic): EIA-364-26, 500 hours (96 hours for nickel-plated versions)
- Fluid immersion: EIA-364-10
- Altitude immersion: EIA-364-03 75,000 feet altitude
- Indirect Lightning Strike: EIA-364-75 Type B Level 2 10kA Peak

### Connector Construction

- Shell, jam-nut: aluminum or stainless steel
- Contacts: copper alloy, gold plating
- Potting compound: epoxy
- Interfacial seal and peripheral seal: fluorosilicone
- Dielectric inserts: high grade rigid dielectric
- Panel O-ring: fluorosilicone

806-039 Jam-nut PCB receptacles with potted-in-place printed circuit board terminals, integral standoffs, and threaded holes for secure attachment to rigid or flex circuit boards. Series supports hybrid signal and high-speed / RF shielded contacts including Glenair Signature El Ochito, Quadrax, 50 Ohm Coax, and differential Twinax for 10GbE, HDMI, USB 3.0, and RF applications. Micro miniature Series 806 connectors save size and weight compared to legacy aerospace-grade circular connectors. These hybrid insert arrangement connectors are suitable for high-speed digital and standard signal applications in unpressurized aircraft zones subject to vibration, moisture, altitude, and temperature extremes.

How To Order							
SAMPLE PART NUMBER	-ME	14	E3	-	20A	S	A
<b>Product</b>	806-039 = Jam-Nut, El Ochito PCB Receptacle						
<b>Shell Material and Finish</b>	ME = Aluminum, Electroless Nickel MT = Aluminum, Ni/PTFE ZR = Aluminum, Black Zinc-Nickel NF = Aluminum, Cad Olive Drab Z1 = Stainless Steel, Passivated						
<b>Shell Size</b>	See Table I						
<b>Contact Type</b>	See Table II						
<b>Ground Option</b>	G = Common Ground* Dash (-) = None *Available for 10-1, 16-2, 18-3, 20-4, 22-5, and 24-8 inserts						
<b>Contact Layout</b>	See Table I						
<b>Contact Gender</b>	P = Pin S = Socket; see Table III for El Ochito mating contacts						
<b>Polarization</b>	A B C D E F						

Table I: Shell Size - Insert Arrangement		
Shell Size - Contact Layout	Number of Contacts	
	22HD	8
10-1		1
16-2		2
18-3		3
20-4		4
22-5		5
24-8		8
14-20A	19	1
16-22	20	2
18-21	18	3
20-28	24	4
22-44	40	4
24-97	93	4


Table II: Contact Type	
Contact Symbol	Description
C	Coax, 50 ohm
D	Differential Twinax 100 ohm
E**	El Ochito
Q	Quadrax, 100 ohm

\*\*See Table III for complete Protocol Code

# ENVIRONMENTAL, MICRO MINIATURE CIRCULAR Series 806 Mil-Aero Connectors



## 806-039 Jam-Nut PCB Receptacle Connectors, High-Speed / RF

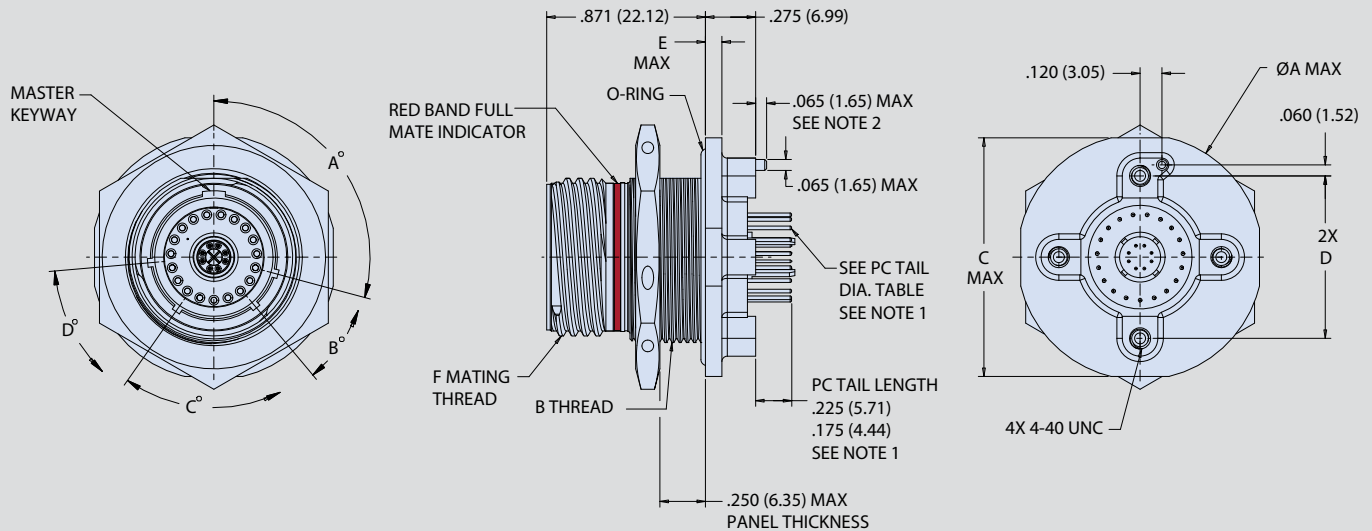

### Dimensions


Shell Size	ØA Max	B Thread	C Max	D	E Max	F Mating Thread
10	1.110 (28.19)	M18 x 1-6g-100R	1.050 (26.67)	0.679 (17.25)	0.100 (2.54)	.625-.067P-.2L-TS-2A
14	1.360 (34.54)	M24 x 1-6g-100R	1.320 (33.53)	0.891 (22.63)	0.100 (2.54)	.875-.067P-.2L-TS-2A
16	1.515 (38.48)	M27 x 1-6g-100R	1.444 (36.68)	1.049 (26.64)	0.100 (2.54)	1.000-.067P-.2L-TS-2A
18	1.610 (40.89)	M30 x 1-6g-100R	1.570 (39.88)	1.148 (29.16)	0.100 (2.54)	1.125-.067P-.2L-TS-2A
20	1.850 (46.99)	M34 x 1-6g-100R	1.760 (44.70)	1.252 (31.80)	0.128 (3.25)	1.250-.067P-.2L-TS-2A
22	2.010 (51.05)	M37 x 1-6g-100R	1.913 (48.59)	1.369 (34.77)	0.128 (3.25)	1.375-.067P-.2L-TS-2A
24	2.195 (55.75)	M41 x 1-6g-100R	2.070 (52.58)	1.509 (38.33)	0.128 (3.25)	1.5000-.067P-.2L-TS-2A

### PC Tail Diameter

Contact Size	PC Tail
22	Ø.020 (0.51)
Coax Signal	Ø.025 (0.64)
Diff Twinax Signal	Ø.025 (0.64)
El Ochito Signal	Ø.016 (0.41)
Quadrax Signal	Ø.025 (0.64)
Twinax Signal	Ø.025 (0.64)
Size 8 Ground	.030 (0.76) SQ.

### Jam-Nut D-Hole Dimensions

Shell Size	M	N
	+0.005 (0.13)	+0.005 (0.13)
	0.000 (0.0)	0.00 (0.0)
10	0.318 (8.08)	0.719 (18.26)
14	0.443 (11.25)	0.955 (24.26)
16	0.505 (12.83)	1.073 (27.25)
18	0.568 (14.43)	1.192 (30.28)
20	0.630 (16.00)	1.349 (34.26)
22	0.693 (17.60)	1.467 (37.26)
24	0.755 (19.18)	1.624 (41.25)



### NOTES

1. See Glenair application note AN0002 for optimal El Ochito board layout and design
2. Integral PCB Stand off 4x 4-40 UNC .156 min thread and locating post
3. See Table III for different combinations of El Ochito types
4. Connector meets all performance requirements of Glenair product specification 806-014 and applies to all finishes
5. Receptacle connector mates with all quick coupling, Glenair 806 style, plug connectors with same polarization and opposite contact gender

# Series 806 Mil-Aero Connectors




## 806-039 Jam-Nut PCB Receptacle Connectors, High-Speed / RF

EI Ochito Mating Contact		
PART NUMBER	PROTOCOLS	
WHITE - PIN	858-045 Type I	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
	858-051 Type II	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
WHITE - SKT	858-046 Type I	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
	858-052 Type II	10GBASE-T ETHERNET, CAT 6A 40GBASE-T ETHERNET, CAT 8
BLUE - PIN	858-047	USB 3.0, OTHER 90 OHM SIGNALS
BLUE - SKT	858-048	USB 3.0, OTHER 90 OHM SIGNALS
RED - PIN	858-049	HDMI, DISPLAYPORT, SATA, OTHER 100 OHM SIGNALS
RED - SKT	858-050	HDMI, DISPLAYPORT, SATA, OTHER 100 OHM SIGNALS

EI Ochito Protocols		
<b>WHITE</b>	<b>BLUE</b>	<b>RED</b>
<b>10GBASE-T</b>	<b>USB 3.0</b>	<b>HDMI, SATA, DisplayPort</b>

The Ochito octaxial contact has a color-coded insulator signifying the data protocol. White is used for 10 Gb Ethernet, blue is used for USB 3.0, and red is used for multi gigabit 100 ohm protocols including HDMI, DisplayPort and SATA. The connector part number includes a protocol code from Table III. This code determines specific contact position for every combination of protocol.



Example  
Code E7



Example  
Code E5

Table III - Protocol Code for EI Ochito Contact Positions B = Blue, R = Red, W = White								
SYMBOL	Contact							
	A	B	C	D	E	F	G	H
E	W	W	W	W	W	W	W	W
E2	B	W	W	W	W	W	W	W
E3	R	W	W	W	W	W	W	W
E4	B	B	W	W	W	W	W	W
E5	R	B	W	W	W	W	W	W
E6	R	R	W	W	W	W	W	W
E7	B	B	B	W	W	W	W	W
E8	R	B	B	W	W	W	W	W
E9	R	R	B	W	W	W	W	W
E10	R	R	R	W	W	W	W	W
E11	B	B	B	B	W	W	W	W
E12	R	B	B	B	W	W	W	W
E13	R	R	B	B	W	W	W	W
E14	R	R	R	B	W	W	W	W
E15	R	R	R	R	W	W	W	W
E16	B	B	B	B	B	W	W	W
E17	R	B	B	B	B	W	W	W
E18	R	R	B	B	B	W	W	W
E19	R	R	R	B	B	W	W	W
E20	R	R	R	R	B	W	W	W
E21	R	R	R	R	R	W	W	W
E22	B	B	B	B	B	B	W	W
E23	R	B	B	B	B	B	W	W
E24	R	R	B	B	B	B	W	W
E25	R	R	R	B	B	B	W	W
E26	R	R	R	R	B	B	W	W
E27	R	R	R	R	R	B	W	W
E28	R	R	R	R	R	R	W	W
E29	B	B	B	B	B	B	B	W
E30	R	B	B	B	B	B	B	W
E31	R	R	B	B	B	B	B	W
E32	R	R	R	B	B	B	B	W
E33	R	R	R	R	B	B	B	W
E34	R	R	R	R	R	B	B	W
E35	R	R	R	R	R	R	B	W
E36	R	R	R	R	R	R	R	W
E37	B	B	B	B	B	B	B	B
E38	R	B	B	B	B	B	B	B
E39	R	R	B	B	B	B	B	B
E40	R	R	R	B	B	B	B	B
E41	R	R	R	R	B	B	B	B
E42	R	R	R	R	R	B	B	B
E43	R	R	R	R	R	R	B	B
E44	R	R	R	R	R	R	R	B
E45	R	R	R	R	R	R	R	R

# Series 806 Mil-Aero Connectors







## 806-039 Jam-Nut PCB Receptacle Connectors, High-Speed / RF

Recommended PCB Layouts are shown for the connector mounting side of PC board. Contact identification numbers are for pin connectors. Socket identification numbers are reversed.

**Size 8 PCB Footprints for Coax, Quadrx, Twinax and El Ochito**

See Appendix A for complete PCB footprint details

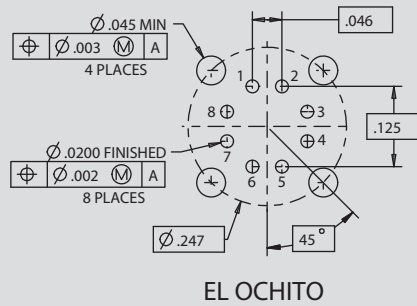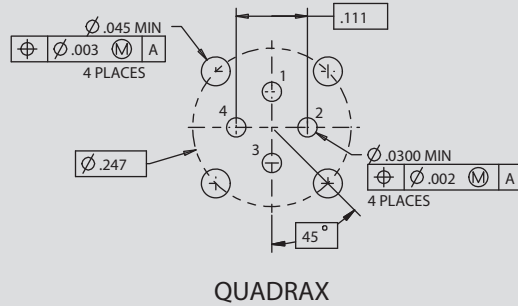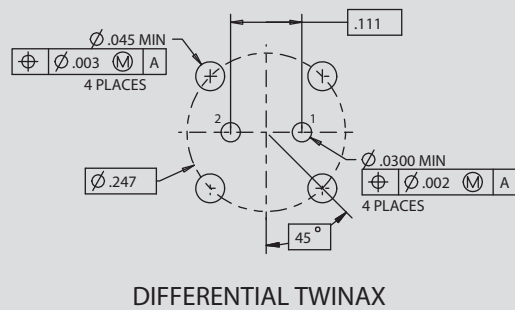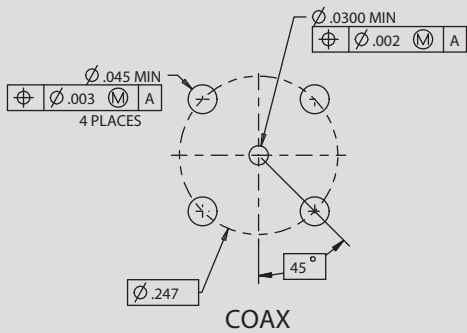

**PIN INTERFACE SHOWN  
SOCKET INTERFACE OPPOSITE**