

# D-Subminiature

## 550-005

### Shrouded Backshell, Braid Trap

- Split EMI Backshell
- Braid Trap Shield Termination
- Saddle Clamp Strain Relief




### 550-005

This accessory fits D-Subminiature M24308 connectors.  
Not compatible with Series 28 HiPer-D

**Braid trap shield termination.** 550-005 diecast aluminum backshell fits M24308 D-Subminiature connectors. EMI protected. Tapered candelabra thread captivates shield braid. Backshell has groove for heatshrink boot (P/N 770-007). Backshell fully shrouds the connector. Eleven shroud lengths. Choose shroud length based on mating connector mounting style. Optional metalastic EMI panel gasket installs onto mating connector. When fully mated, the backshell shroud seats onto the gasket for low-resistance grounding and EMI protection. Aluminum alloy, stainless steel hardware.

**TABLE 1 SCREWLOCK OPTIONS**

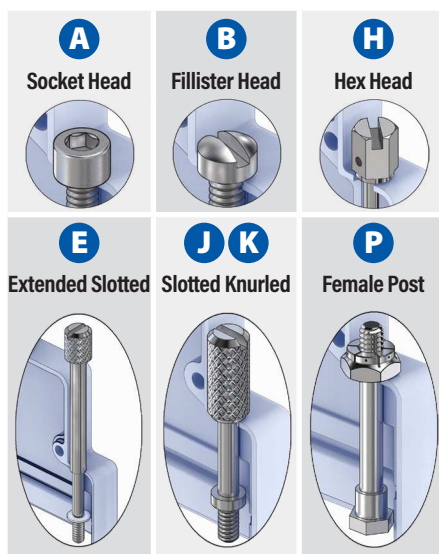

### PART NUMBER

Sample PN → **550T005 M 3 R3 A 0 F 04**

<b>Base P/N</b>	<b>550T005</b> <b>T</b> Top Entry <b>550E005</b> <b>E</b> End Entry <b>550S005</b> <b>S</b> Side Entry																																			
<b>Finish</b>	<b>TZ</b> Tin-Zinc <b>MN</b> Mega-Nickel <b>JF</b> Cadmium, Yel. Chromate <b>M</b> Electroless Nickel <b>NF</b> Olive Drab Cadmium <b>MT</b> Nickel-PTFE <b>ZR</b> Black Zinc-Nickel																																			
<b>Shell Size</b>	<b>1 2 3 4 5 6</b>																																			
<b>Shroud Length</b>	<b>Mating Connector Rear Panel Mounting</b>																																			
	<table border="1"> <thead> <tr> <th>Code</th> <th>Panel Thickness</th> <th>E</th> </tr> </thead> <tbody> <tr><td><b>R1</b></td><td>.031 (0.8)</td><td>.247 (6.3)</td></tr> <tr><td><b>R2</b></td><td>.047 (1.2)</td><td>.231 (5.9)</td></tr> <tr><td><b>R3</b></td><td>.062 (1.6)</td><td>.216 (5.5)</td></tr> <tr><td><b>R4</b></td><td>.093 (2.4)</td><td>.185 (4.7)</td></tr> <tr><td><b>R5</b></td><td>.104 (2.6)</td><td>.174 (4.4)</td></tr> <tr><td><b>R6</b></td><td>.125 (3.2)</td><td>.153 (3.9)</td></tr> <tr><td><b>R7</b></td><td>.156 (4.0)</td><td>.125 (3.2)</td></tr> <tr><td><b>R8</b></td><td>.135 (3.4)</td><td>.140 (3.6)</td></tr> <tr><td><b>R9</b></td><td>.188 (4.8)</td><td>.094 (2.4)</td></tr> <tr><td><b>CC</b></td><td>Cable-to-Cable</td><td>.174 (4.4)</td></tr> <tr><td><b>F0</b></td><td>Front Panel Mount</td><td>.343 (8.7)</td></tr> </tbody> </table>	Code	Panel Thickness	E	<b>R1</b>	.031 (0.8)	.247 (6.3)	<b>R2</b>	.047 (1.2)	.231 (5.9)	<b>R3</b>	.062 (1.6)	.216 (5.5)	<b>R4</b>	.093 (2.4)	.185 (4.7)	<b>R5</b>	.104 (2.6)	.174 (4.4)	<b>R6</b>	.125 (3.2)	.153 (3.9)	<b>R7</b>	.156 (4.0)	.125 (3.2)	<b>R8</b>	.135 (3.4)	.140 (3.6)	<b>R9</b>	.188 (4.8)	.094 (2.4)	<b>CC</b>	Cable-to-Cable	.174 (4.4)	<b>F0</b>	Front Panel Mount
Code	Panel Thickness	E																																		
<b>R1</b>	.031 (0.8)	.247 (6.3)																																		
<b>R2</b>	.047 (1.2)	.231 (5.9)																																		
<b>R3</b>	.062 (1.6)	.216 (5.5)																																		
<b>R4</b>	.093 (2.4)	.185 (4.7)																																		
<b>R5</b>	.104 (2.6)	.174 (4.4)																																		
<b>R6</b>	.125 (3.2)	.153 (3.9)																																		
<b>R7</b>	.156 (4.0)	.125 (3.2)																																		
<b>R8</b>	.135 (3.4)	.140 (3.6)																																		
<b>R9</b>	.188 (4.8)	.094 (2.4)																																		
<b>CC</b>	Cable-to-Cable	.174 (4.4)																																		
<b>F0</b>	Front Panel Mount	.343 (8.7)																																		
<b>Screwlocks</b> <i>(Table 1)</i>	<table border="1"> <thead> <tr> <th>Code</th> <th>Type</th> <th>Profiles</th> </tr> </thead> <tbody> <tr><td><b>A</b></td><td>Male, Socket Head</td><td><b>S T</b></td></tr> <tr><td><b>B</b></td><td>Male, Fillister Head</td><td><b>S T</b></td></tr> <tr><td><b>E</b></td><td>Male, Extended Slotted</td><td><b>S T</b></td></tr> <tr><td><b>H</b></td><td>Male, Hex Head, Drilled</td><td><b>S T</b></td></tr> <tr><td><b>J</b></td><td>Male, Slotted, Knurled</td><td><b>E</b></td></tr> <tr><td><b>K</b></td><td>Male, Slotted, Knurled</td><td><b>S T</b></td></tr> <tr><td><b>P</b></td><td>Female Hex Post, Fixed</td><td><b>S T</b></td></tr> </tbody> </table>	Code	Type	Profiles	<b>A</b>	Male, Socket Head	<b>S T</b>	<b>B</b>	Male, Fillister Head	<b>S T</b>	<b>E</b>	Male, Extended Slotted	<b>S T</b>	<b>H</b>	Male, Hex Head, Drilled	<b>S T</b>	<b>J</b>	Male, Slotted, Knurled	<b>E</b>	<b>K</b>	Male, Slotted, Knurled	<b>S T</b>	<b>P</b>	Female Hex Post, Fixed	<b>S T</b>											
	Code	Type	Profiles																																	
	<b>A</b>	Male, Socket Head	<b>S T</b>																																	
	<b>B</b>	Male, Fillister Head	<b>S T</b>																																	
	<b>E</b>	Male, Extended Slotted	<b>S T</b>																																	
	<b>H</b>	Male, Hex Head, Drilled	<b>S T</b>																																	
	<b>J</b>	Male, Slotted, Knurled	<b>E</b>																																	
<b>K</b>	Male, Slotted, Knurled	<b>S T</b>																																		
<b>P</b>	Female Hex Post, Fixed	<b>S T</b>																																		
<b>EMI Panel Gasket</b>	<b>0</b> No Gasket <b>1</b> Gasket Included <i>(install on mating connector)</i>																																			
<b>Strain Relief</b>	<b>E</b> Saddle Clamp <b>G</b> Gland Nut																																			
<b>Entry Size</b>	<table border="1"> <thead> <tr> <th>Entry Size</th> <th>Cable Range Min</th> <th>Cable Range Max</th> <th>Shell Size</th> </tr> </thead> <tbody> <tr><td><b>02</b></td><td>.125 (3.2)</td><td>.250 (6.4)</td><td>1-6</td></tr> <tr><td><b>03</b></td><td>.250 (6.4)</td><td>.375 (9.5)</td><td>1-6</td></tr> <tr><td><b>04</b></td><td>.312 (7.9)</td><td>.500 (12.7)</td><td>1-6</td></tr> <tr><td><b>05</b></td><td>.437 (11.1)</td><td>.625 (15.9)</td><td>1-6</td></tr> <tr><td><b>06</b></td><td>.562 (14.3)</td><td>.750 (19.1)</td><td>1-6</td></tr> <tr><td><b>07</b></td><td>.687 (17.4)</td><td>.875 (22.2)</td><td>6</td></tr> <tr><td><b>08</b></td><td>.812 (20.6)</td><td>1.000 (25.4)</td><td>6</td></tr> </tbody> </table>	Entry Size	Cable Range Min	Cable Range Max	Shell Size	<b>02</b>	.125 (3.2)	.250 (6.4)	1-6	<b>03</b>	.250 (6.4)	.375 (9.5)	1-6	<b>04</b>	.312 (7.9)	.500 (12.7)	1-6	<b>05</b>	.437 (11.1)	.625 (15.9)	1-6	<b>06</b>	.562 (14.3)	.750 (19.1)	1-6	<b>07</b>	.687 (17.4)	.875 (22.2)	6	<b>08</b>	.812 (20.6)	1.000 (25.4)	6			
	Entry Size	Cable Range Min	Cable Range Max	Shell Size																																
	<b>02</b>	.125 (3.2)	.250 (6.4)	1-6																																
	<b>03</b>	.250 (6.4)	.375 (9.5)	1-6																																
	<b>04</b>	.312 (7.9)	.500 (12.7)	1-6																																
	<b>05</b>	.437 (11.1)	.625 (15.9)	1-6																																
	<b>06</b>	.562 (14.3)	.750 (19.1)	1-6																																
<b>07</b>	.687 (17.4)	.875 (22.2)	6																																	
<b>08</b>	.812 (20.6)	1.000 (25.4)	6																																	



D-SUBMINIATURE ACCESSORIES