

MIL-DTL-38999 Series IV Type
234-212 Panel mount feed-thru receptacles with PC tails



"BETTER-THAN-QPL" FEATURES AND BENEFITS

- Secure breach-lock mating connector meets D38999 shock and vibrate
- Glenair Signature Tin Zinc finish class is RoHS compliant and cadmium compatible
- Precision-machined key/keyway polarization for reliable mismatching protection
- Scoop-proof design prevents pin damage and short circuits
- Fully tooled for all MIL-STD-1560 insert arrangements
- Contact options include size #22D, #20, #16, and #12 (see High-Speed series for Size #8)
- 500 mating cycles exceeds MIL-DTL-38999 specification

| HOW TO ORDER | | | | | | | | | |
|-------------------------------|--|------------|-----------|-----------|------------|----------|----------|------------|--|
| Sample Part Number | 234-212 | -D0 | NF | 11 | -35 | P | N | -01 | |
| Basic Part Number | 234-212 | | | | | | | | |
| Connector Style | D0 = Receptacle, wall-mount through holes HM = Receptacle, wall-mount w/metric helicoil HS = Receptacle, wall-mount w/standard helicoil CM = Receptacle, wall-mount w/metric clinch nut CS = Receptacle, wall-mount w/standard clinch nut | | | | | | | | |
| Material/Finish | (See Table II) | | | | | | | | |
| Shell Size | 11, 13, 15, 17, 19, 21, 23, 25 | | | | | | | | |
| Insert Arrangement | PER MIL-STD-1560 | | | | | | | | |
| Insert Designator | P = Pin Contact, Gold, Socket on opposite side, 1500 Cycles S = Socket Contact Gold, Socket on opposite side, 1500 Cycles | | | | | | | | |
| Alternate Polarization | A, B, C, D, E, N = Normal, U = Universal (Glenair Equivalent Only) | | | | | | | | |
| Panel Accomodation | (See Table V) | | | | | | | | |

| TABLE I - MATERIAL/FINISH | | | |
|---------------------------|-------------|-----------------|----------------------------------|
| Equip Class | Sym | Material | Finish |
| W | NF | Aluminum Alloy | Cad/O.D. over Electroless Nickel |
| G* | MA** | | Electroless Nickel, Matte |
| T* | MT | | Nickel-PTFE |
| F | ME | | Electroless Nickel |
| AA | MN | | MegaNickel |
| V | TZ | | Tin-Zinc |
| Z* | ZR | | Zinc Ni, Black (Tri-Valent CR) |
| K* | Z1 | Stainless Steel | Passivate |
| L* | ZL | | Electrodeposited Nickel |

* = Glenair Equivalent Only

** = Connectors for space applications must be ordered with "MA" finish and mod code "-186T" to conform to the thermal vacuum outgassing requirements of class G.

| TABLE VII - POLARIZING POSITIONS | | | | | | | | | | |
|----------------------------------|------|------|------|------|------|------|------|------|------|-----|
| | N | A | B | C | D | K | L | M | R | U |
| X | 110° | 100° | 90° | 80° | 70° | 120° | 120° | 120° | 120° | N/A |
| Y | 250° | 260° | 270° | 280° | 290° | 255° | 265° | 275° | 285° | N/A |

ENVIRONMENTAL CONNECTORS

MIL-DTL-38999 Series IV Type
234-212 Panel mount feed-thru receptacles with PC tails

ENVIRONMENTAL CONNECTORS

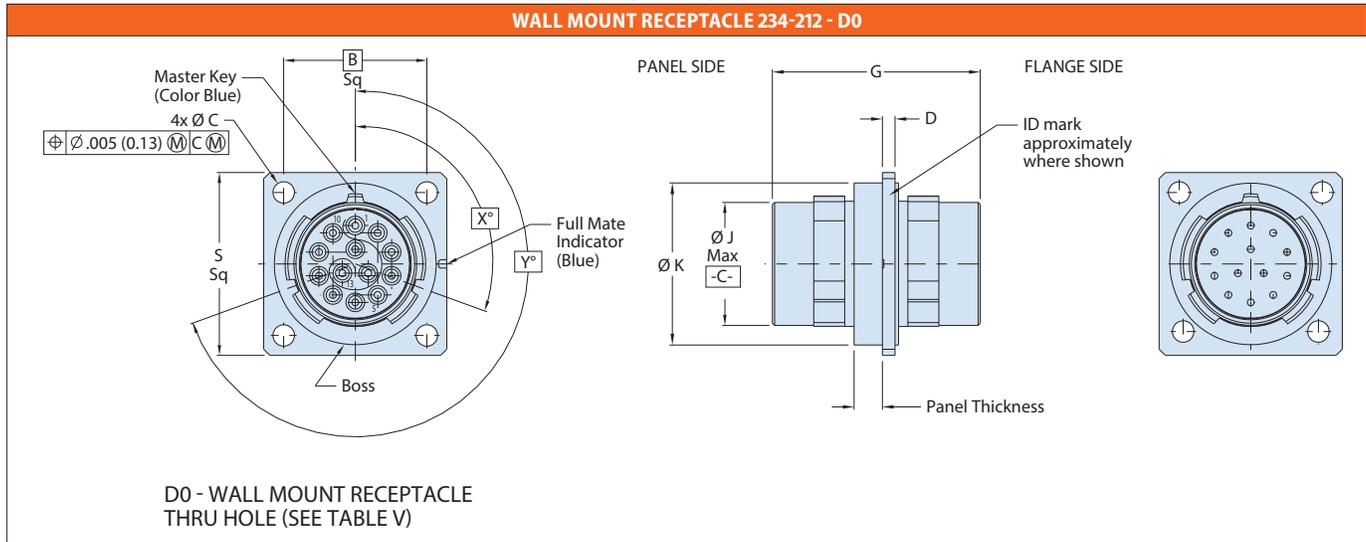


TABLE VI - PANEL CUTOUT



| Shell Size | Shell Size Code | ØKK Min | BB Bsc | ØDD |
|------------|-----------------|---------------|---------------|---------------------------|
| 11 | B | 0.796 (20.22) | 0.812 (20.62) | .133 (3.38) / .123 (3.12) |
| 13 | C | 0.922 (23.42) | 0.906 (23.01) | |
| 15 | D | 1.047 (26.59) | 0.969 (24.61) | |
| 17 | E | 1.219 (30.96) | 1.062 (26.97) | |
| 19 | F | 1.297 (32.94) | 1.156 (29.36) | |
| 21 | G | 1.422 (36.12) | 1.250 (31.75) | .159 (4.04) / .149 (3.78) |
| 23 | H | 1.547 (39.29) | 1.375 (34.93) | |
| 25 | J | 1.672 (42.47) | 1.500 (38.10) | |

Wall Mount Receptacle Recommended Panel Cutout

NOTES

- Material/Finish:
 - Shell - See Table Ii
 - Contacts - Copper Alloy / Gold Plated
 - Insulators - High-Grade Rigid Dielectric.
 - Seals - Fluorosilicone Blend.
- Glenair's 234-212 feedthru connector is designed to meet or exceed the mechanical, dimensional, electrical and environmental requirements of MIL-DTL-38999, and MIL-STD-1560 except as shown and/or noted. Glenair feedthru mates with any QPL manufacturer's MIL-DTL-38999, Series IV plug connector, D38999/46, having the same shell size, insert arrangement, and polarization.
- Insert arrangement is in accordance with MIL-STD-1560. Contact manufacturer for additional arrangement options.
- Insert arrangement is shown for reference only. Pin interface show
- Pin or socket on panel side will result opposite on the other side of connectors.
- Power to a given contact on one end will result in power to a contact directly opposite, regardless of identification letter.
- Electrical safety limits must be established by user. Peak voltage, switching surge, transient, etc. Should be used to determine the safety application.
- Alternate polarization 'U' (Universal) is a non-standard/non-mil-spec option which allows for mating to any QPL manufacturer's MIL-DTL-38999, Series IV connector having the same shell size, insert arrangement, and mating contact size. Universal connectors are intended for use in testing facilities only and should be highly evaluated before consideration in another environment
- Front panel mount only.



MIL-DTL-38999 Series IV Type
234-212 Panel mount feed-thru receptacles with PC tails

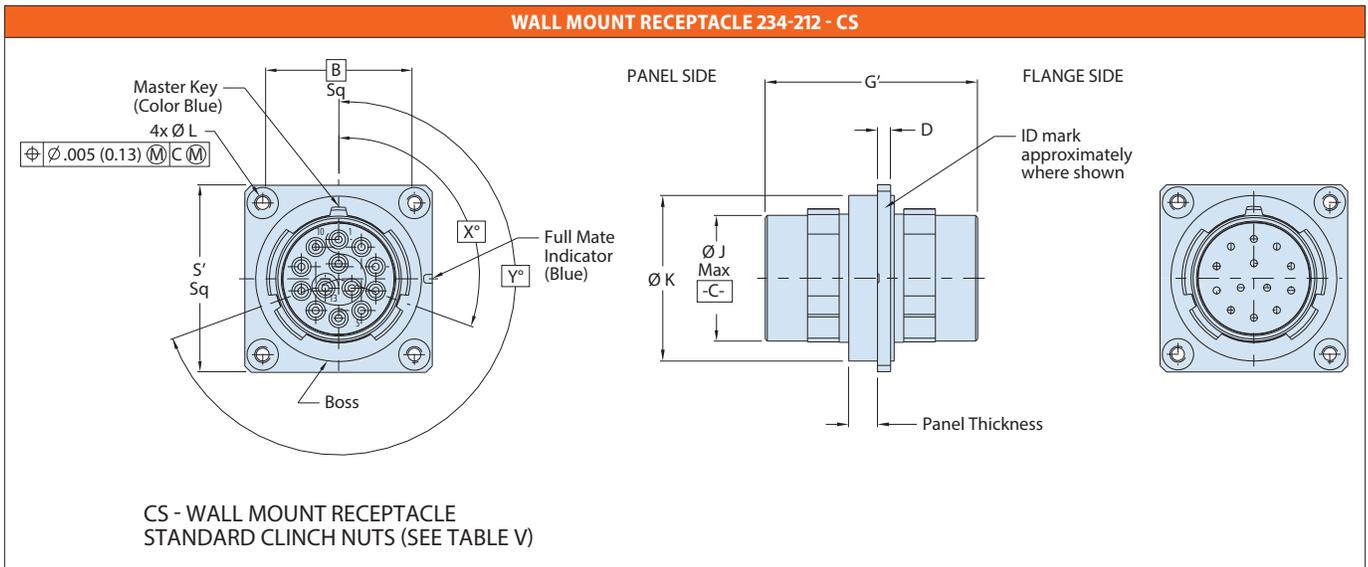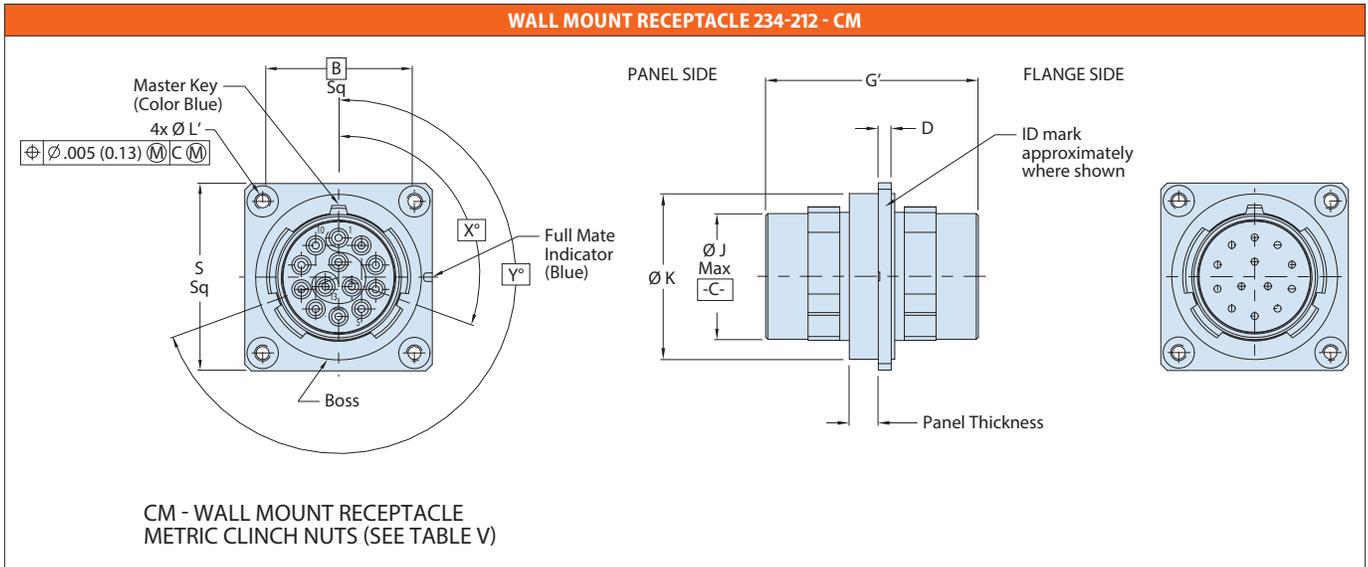

| TABLE V - PANEL ACCOMMODATION/OVERALL LENGTH | | | |
|--|-----------------|---------------|---------------|
| Sym | Panel Thickness | G ± .020 | G' ± .020 |
| 01 | .175 (4.45) | 1.840 (46.74) | 1.902 (48.31) |
| | .062 (1.57) | | |
| 02 | .300 (7.62) | 1.966 (49.94) | 2.028 (51.51) |
| | .062 (1.57) | | |
| 03 | .500 (12.70) | 2.166 (55.02) | 2.228 (56.59) |
| | .062 (1.57) | | |


MIL-DTL-38999 Series IV Type
234-212 Panel mount feed-thru receptacles with PC tails

ENVIRONMENTAL CONNECTORS

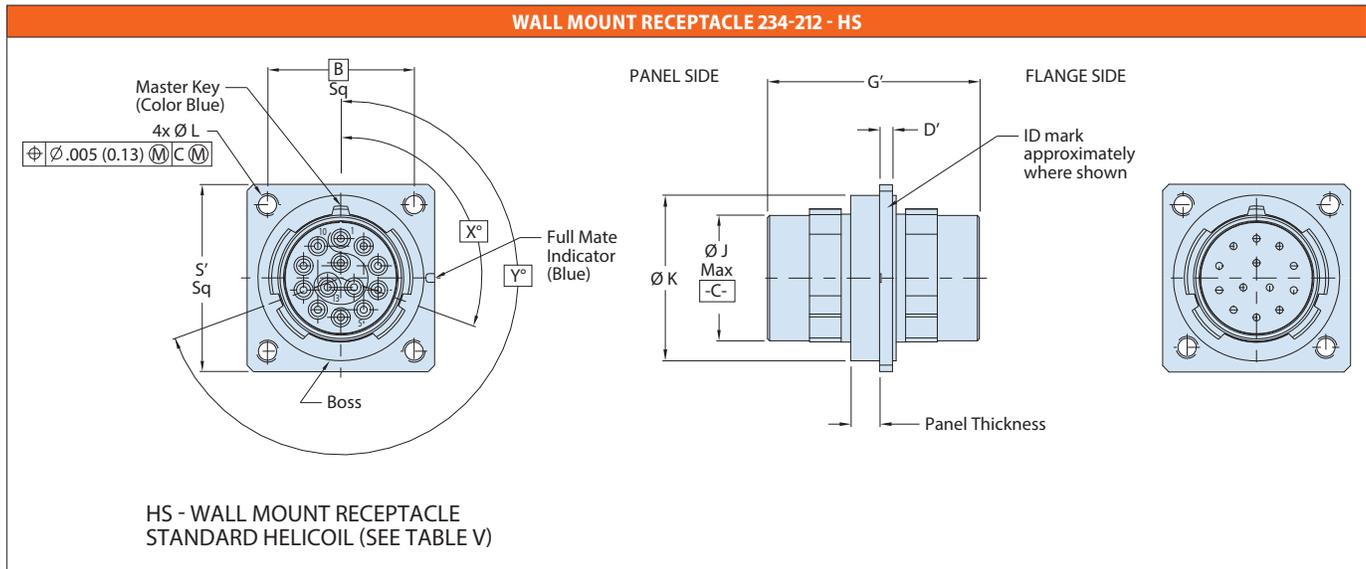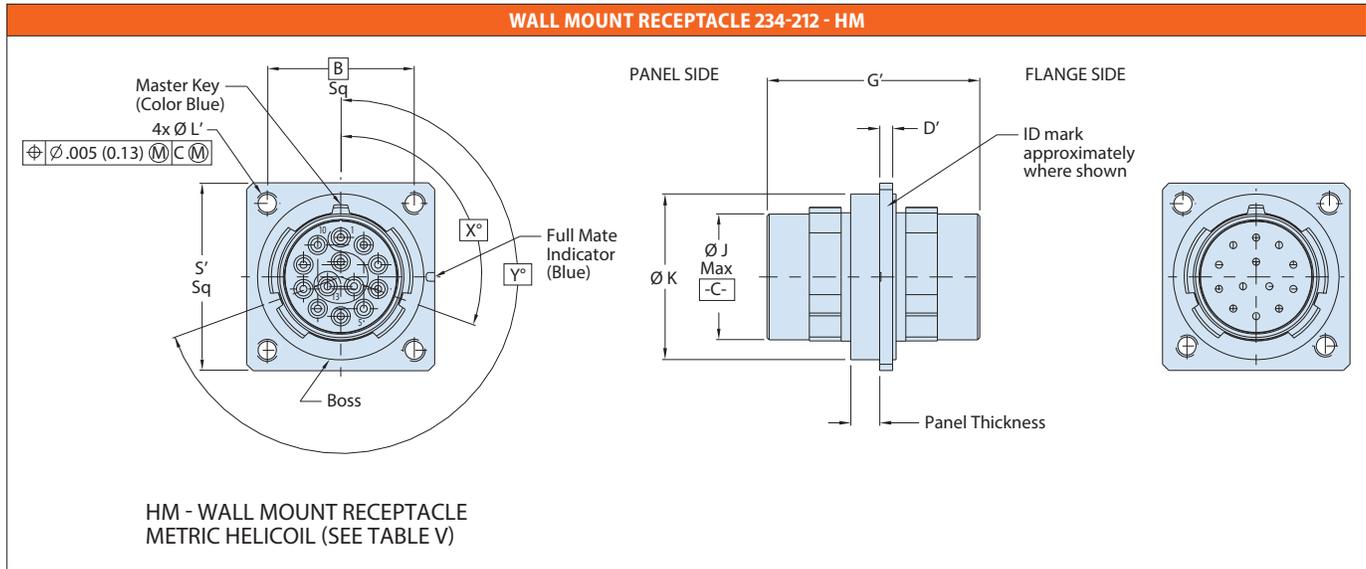


MIL-DTL-38999 Series IV Type
234-217 High-speed plug, and panel mount and jam nut receptacles ins. arrangements

HIGH-SPEED AND HYBRID INSERT ARRANGEMENTS

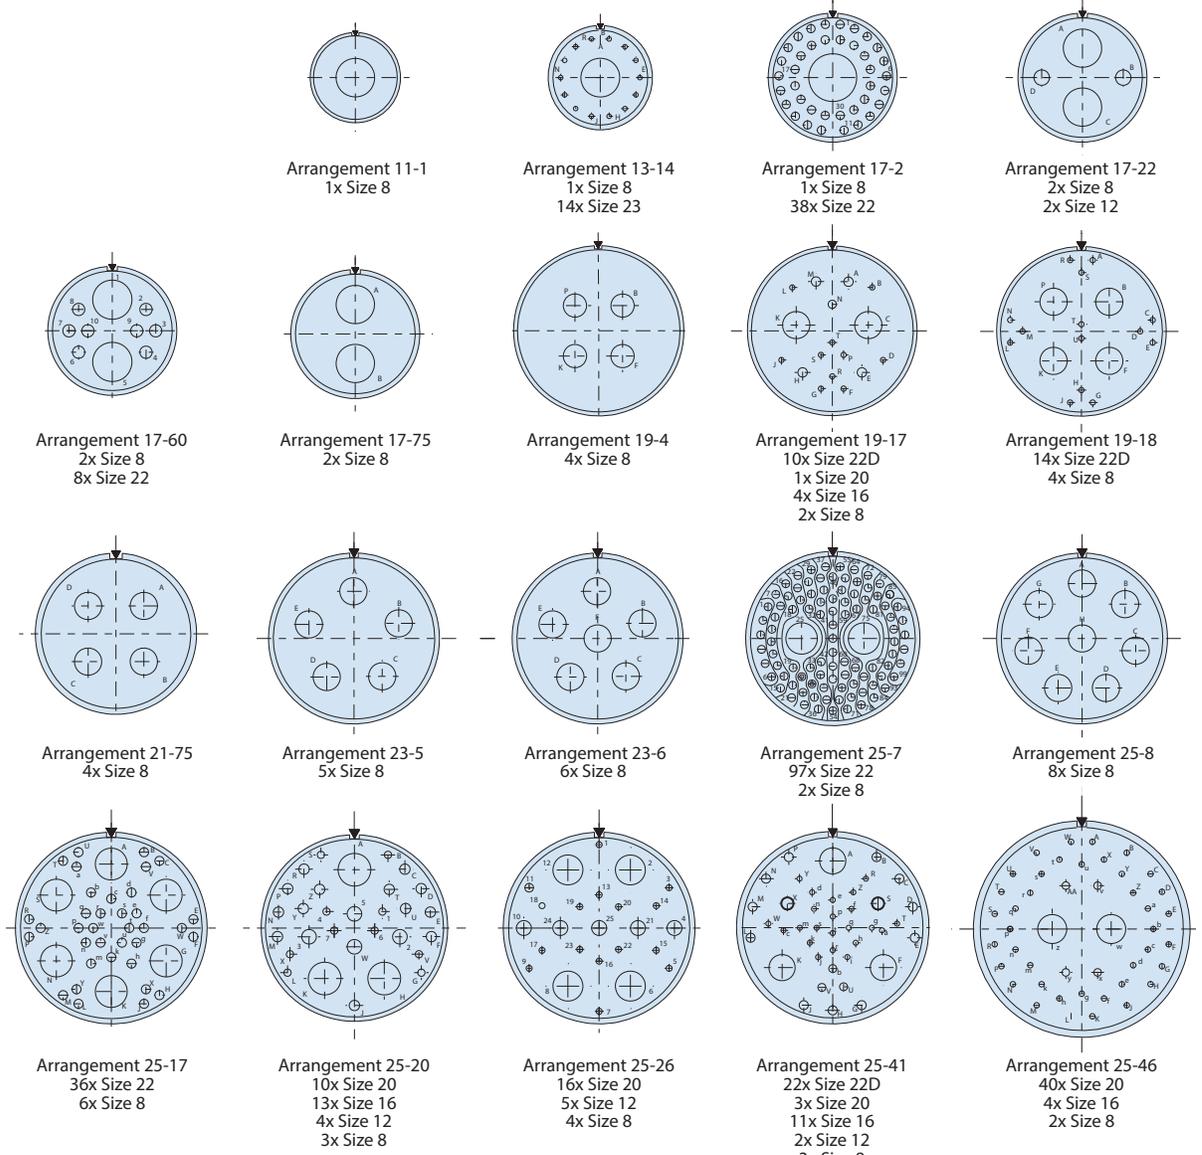

Insert arrangements, mating face of pin insert shown. Replace X with C, D, E, Q, P, or T (See Table III).

CONTACT INNER PIN ORIENTATION

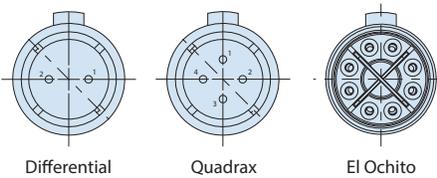

BREECH-LOCK ENVIRONMENTAL CONNECTORS

MIL-DTL-38999 Series IV Type
234-218 High-speed panel mount receptacles, PC tail insert arrangements

FIGURE 1 - INSERT ARRANGEMENTS


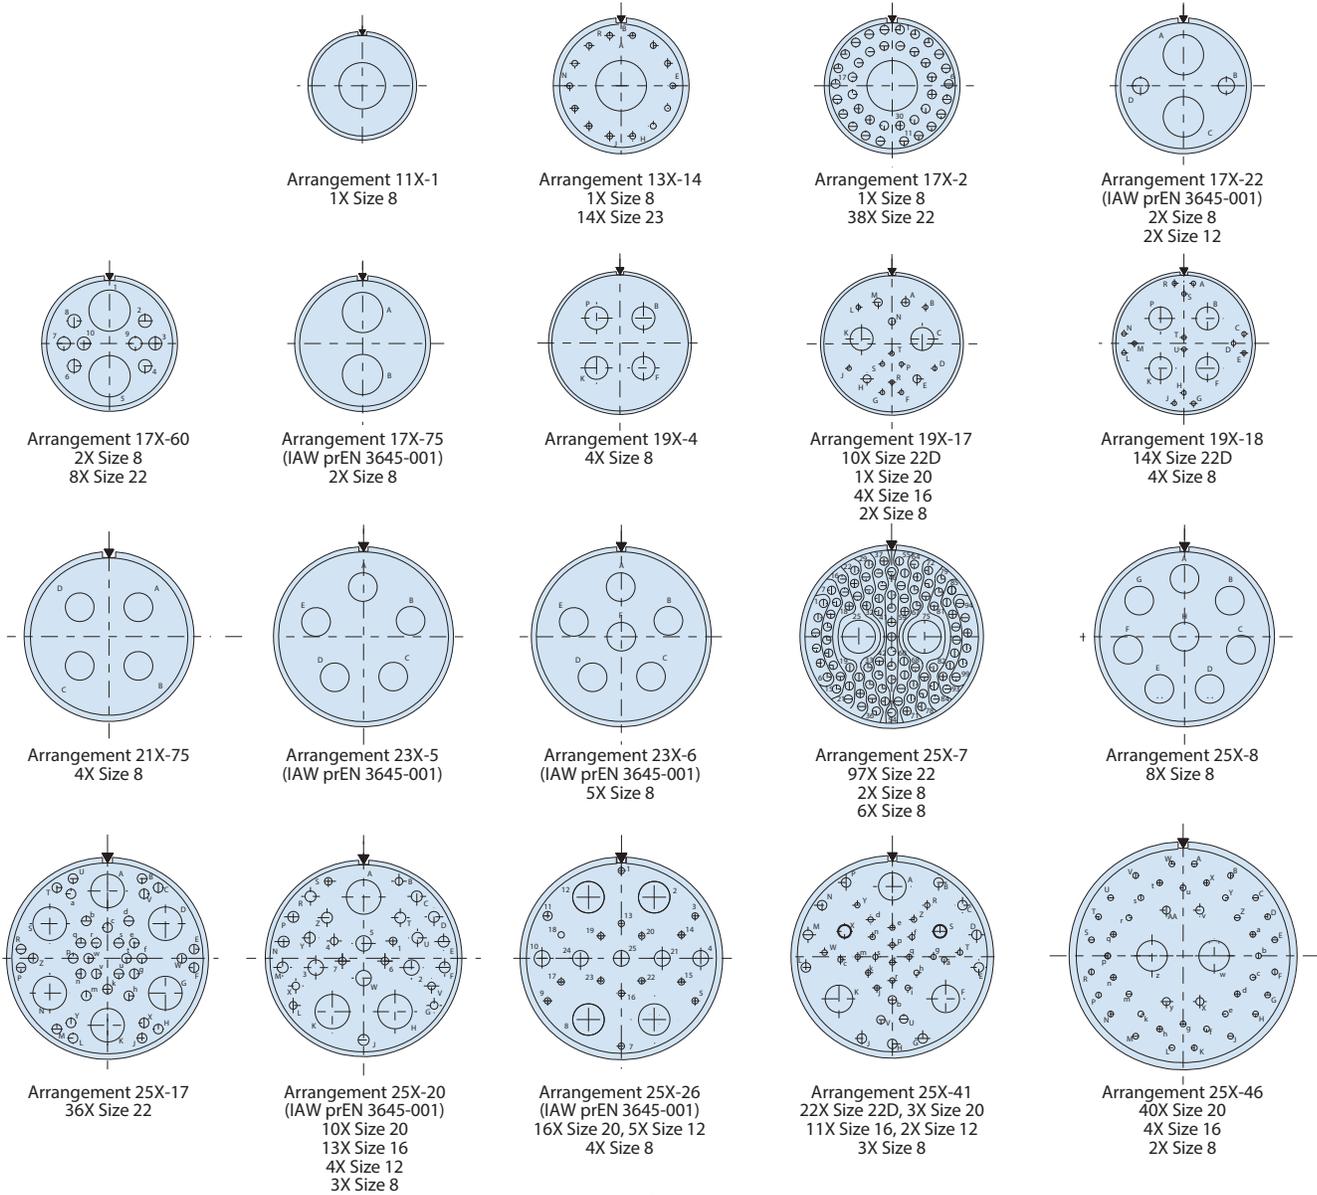


Figure 1
Insert arrangements, mating
face of pin insert shown.
Replace X with C, D, E, Q or T
(See Table VI)

FIGURE 2 - CONTACT INNER PIN ORIENTATION

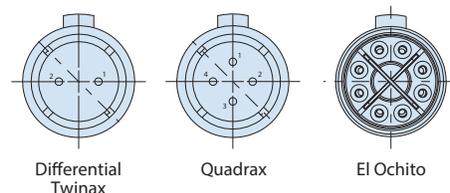

BREECH-LOCK ENVIRONMENTAL CONNECTORS

PCB Footprints: Standard

PCB FOOTPRINTS

Mating face of pin insert shown (socket will be opposite)


| 11-2 2 #16 | | <table border="1"> <thead> <tr> <th rowspan="2">I.D. No.</th> <th colspan="2">Location</th> </tr> <tr> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>.095</td> <td>.000</td> </tr> <tr> <td>B</td> <td>-.095</td> <td>.000</td> </tr> </tbody> </table> | | I.D. No. | Location | | X | Y | A | .095 | .000 | B | -.095 | .000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|-------|---|----------|----------|----------|----------|----------|---|----------|----------|------|---|-------|-------|---|-------|-------|------|-------|-------|-------|-------|------|------|---|-------|------|---|------|------|----|-------|------|---|------|-------|----|------|------|---|------|-------|----|------|-------|---|------|-------|----|-------|-------|---|-------|-------|--|--|--|
| | | I.D. No. | Location | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | Y | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | .095 | .000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | -.095 | .000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11-4 4 #20 | | <table border="1"> <thead> <tr> <th rowspan="2">I.D. No.</th> <th colspan="2">Location</th> </tr> <tr> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>.065</td> <td>.065</td> </tr> <tr> <td>B</td> <td>.065</td> <td>-.065</td> </tr> <tr> <td>C</td> <td>-.065</td> <td>-.065</td> </tr> <tr> <td>D</td> <td>-.065</td> <td>.065</td> </tr> </tbody> </table> | | I.D. No. | Location | | X | Y | A | .065 | .065 | B | .065 | -.065 | C | -.065 | -.065 | D | -.065 | .065 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | I.D. No. | Location | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X | Y | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | A | .065 | .065 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | .065 | -.065 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | -.065 | -.065 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | -.065 | .065 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11-5 5 #20 | | <table border="1"> <thead> <tr> <th rowspan="2">I.D. No.</th> <th colspan="2">Location</th> </tr> <tr> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>.065</td> <td>.056</td> </tr> <tr> <td>B</td> <td>.113</td> <td>-.065</td> </tr> <tr> <td>C</td> <td>.000</td> <td>-.130</td> </tr> <tr> <td>D</td> <td>-.113</td> <td>-.065</td> </tr> <tr> <td>E</td> <td>-.065</td> <td>.056</td> </tr> </tbody> </table> | | I.D. No. | Location | | X | Y | A | .065 | .056 | B | .113 | -.065 | C | .000 | -.130 | D | -.113 | -.065 | E | -.065 | .056 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | I.D. No. | Location | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X | Y | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | A | .065 | .056 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | B | .113 | -.065 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | .000 | -.130 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | -.113 | -.065 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | -.065 | .056 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11-35 13 #22D | | <table border="1"> <thead> <tr> <th rowspan="2">I.D. No.</th> <th colspan="2">Location</th> <th rowspan="2">I.D. No.</th> <th colspan="2">Location</th> </tr> <tr> <th>X</th> <th>Y</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>.000</td> <td>.146</td> <td>8</td> <td>-.138</td> <td>-.045</td> </tr> <tr> <td>2</td> <td>.085</td> <td>.118</td> <td>9</td> <td>-.138</td> <td>.045</td> </tr> <tr> <td>3</td> <td>.138</td> <td>.045</td> <td>10</td> <td>-.085</td> <td>.118</td> </tr> <tr> <td>4</td> <td>.138</td> <td>-.045</td> <td>11</td> <td>.000</td> <td>.056</td> </tr> <tr> <td>5</td> <td>.085</td> <td>-.118</td> <td>12</td> <td>.049</td> <td>-.035</td> </tr> <tr> <td>6</td> <td>.000</td> <td>-.146</td> <td>13</td> <td>-.049</td> <td>-.035</td> </tr> <tr> <td>7</td> <td>-.085</td> <td>-.118</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | | | | I.D. No. | Location | | I.D. No. | Location | | X | Y | X | Y | 1 | .000 | .146 | 8 | -.138 | -.045 | 2 | .085 | .118 | 9 | -.138 | .045 | 3 | .138 | .045 | 10 | -.085 | .118 | 4 | .138 | -.045 | 11 | .000 | .056 | 5 | .085 | -.118 | 12 | .049 | -.035 | 6 | .000 | -.146 | 13 | -.049 | -.035 | 7 | -.085 | -.118 | | | |
| | | I.D. No. | Location | | I.D. No. | | Location | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | X | Y | | X | Y | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 1 | .000 | .146 | 8 | -.138 | -.045 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2 | .085 | .118 | 9 | -.138 | .045 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 3 | .138 | .045 | 10 | -.085 | .118 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 4 | .138 | -.045 | 11 | .000 | .056 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 5 | .085 | -.118 | 12 | .049 | -.035 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 6 | .000 | -.146 | 13 | -.049 | -.035 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 7 | -.085 | -.118 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

PCB Footprints: Standard

Mating face of pin insert shown (socket will be opposite)


PCB FOOTPRINTS

11-98
6 #20




| I.D. No. | Location | |
|----------|----------|-------|
| | X | Y |
| A | .000 | .130 |
| B | .130 | .000 |
| C | .065 | -.113 |
| D | -.065 | -.113 |
| E | -.130 | .000 |
| F | .000 | .000 |

11-99
7 #20




| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|------|
| | X | Y | | X | Y |
| A | .065 | .113 | E | -.130 | .000 |
| B | .130 | .000 | F | -.065 | .113 |
| C | .065 | -.113 | G | .000 | .000 |
| D | -.065 | -.113 | | | |

13-4
4 #16




| I.D. No. | Location | |
|----------|----------|-------|
| | X | Y |
| A | .000 | .150 |
| B | .146 | .035 |
| C | .000 | -.083 |
| D | -.146 | .035 |

13-8
8 #20




| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .065 | .157 | E | -.120 | -.120 |
| B | .170 | .000 | F | -.170 | .000 |
| C | .120 | -.120 | G | -.065 | .157 |
| D | .000 | -.170 | H | .000 | .044 |

13-98
10 #20



| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .195 | F | -.164 | -.105 |
| B | .125 | .150 | G | -.193 | .030 |
| C | .193 | .030 | H | -.125 | .150 |
| D | .164 | -.105 | J | .065 | -.015 |
| E | .000 | -.135 | K | -.065 | -.015 |

13-35
22 #22D




| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| 1 | .045 | .197 | 12 | -.182 | .088 |
| 2 | .126 | .158 | 13 | -.126 | .158 |
| 3 | .182 | .088 | 14 | -.045 | .197 |
| 4 | .203 | .000 | 15 | .045 | .107 |
| 5 | .182 | -.088 | 16 | .117 | .026 |
| 6 | .126 | -.158 | 17 | .093 | -.075 |
| 7 | .045 | -.197 | 18 | .000 | -.120 |
| 8 | -.045 | -.197 | 19 | -.093 | -.075 |
| 9 | -.126 | -.158 | 20 | -.117 | .026 |
| 10 | -.182 | -.088 | 21 | -.045 | .107 |
| 11 | -.203 | .000 | 22 | .000 | -.030 |

PCB Footprints: Standard

PCB FOOTPRINTS


Mating face of pin insert shown (socket will be opposite)

15-5
5 #16




| I.D. No. | Location | |
|----------|----------|-------|
| | X | Y |
| A | .000 | .100 |
| B | .174 | .024 |
| C | .094 | -.148 |
| D | -.094 | -.148 |
| E | -.174 | .024 |

15-18
18 #20




| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .065 | .252 | K | -.195 | .113 |
| B | .195 | .113 | L | -.065 | .252 |
| C | .260 | .000 | M | -.065 | .113 |
| D | .195 | -.113 | N | .065 | .113 |
| E | .130 | -.225 | P | .130 | .000 |
| F | .000 | -.225 | R | .065 | -.113 |
| G | -.130 | -.225 | S | -.065 | -.113 |
| H | -.195 | -.113 | T | -.130 | .000 |
| J | -.260 | .000 | U | .000 | .000 |

15-19
19 #20



| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .225 | L | -.195 | .113 |
| B | .130 | .225 | M | -.130 | .225 |
| C | .195 | .113 | N | -.065 | .113 |
| D | .260 | .000 | P | .065 | .113 |
| E | .195 | -.113 | R | .130 | .000 |
| F | .130 | -.225 | S | .065 | -.113 |
| G | .000 | -.225 | T | -.065 | -.113 |
| H | -.130 | -.225 | U | -.130 | .000 |
| J | -.195 | -.113 | Y | .000 | .000 |
| K | -.260 | .000 | | | |

15-35
37 #22D




| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| 1 | .045 | .262 | 20 | .123 | .119 |
| 2 | .123 | .217 | 21 | .170 | .040 |
| 3 | .211 | .160 | 22 | .170 | -.050 |
| 4 | .254 | .080 | 23 | .123 | -.127 |
| 5 | .266 | -.010 | 24 | .045 | -.172 |
| 6 | .247 | -.098 | 25 | -.045 | -.172 |
| 7 | .200 | -.175 | 26 | -.123 | -.127 |
| 8 | .130 | -.232 | 27 | -.170 | -.050 |
| 9 | .045 | -.262 | 28 | -.170 | .040 |
| 10 | -.045 | -.262 | 29 | -.123 | .119 |
| 11 | -.130 | -.232 | 30 | -.045 | .172 |
| 12 | -.200 | -.175 | 31 | .045 | .074 |
| 13 | -.247 | -.098 | 32 | .090 | -.004 |
| 14 | -.266 | -.010 | 33 | .045 | -.082 |
| 15 | -.254 | .080 | 34 | -.045 | -.082 |
| 16 | -.211 | .160 | 35 | -.090 | -.004 |
| 17 | -.123 | .217 | 36 | -.045 | .074 |
| 18 | -.045 | .262 | 37 | .000 | -.004 |
| 19 | .045 | .172 | | | |

PCB Footprints: Standard

Mating face of pin insert shown (socket will be opposite)

17-6


6 #12



| I.D. No. | Location | |
|----------|----------|-------|
| | X | Y |
| A | .121 | .209 |
| B | .241 | .000 |
| C | .000 | -.241 |
| D | -.241 | .000 |
| E | -.121 | .209 |

17-8


8 #16



| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .236 | E | -.094 | -.216 |
| B | .128 | .086 | F | -.230 | -.078 |
| C | .230 | -.078 | G | -.128 | .086 |
| D | .094 | -.216 | H | .000 | -.052 |

17-26


26 #20



| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .321 | P | -.239 | .214 |
| B | .131 | .293 | R | -.131 | .293 |
| C | .239 | .214 | S | -.070 | .177 |
| D | .305 | .099 | T | .070 | .177 |
| E | .319 | -.034 | U | .175 | .094 |
| F | .278 | -.161 | V | .178 | -.036 |
| G | .189 | -.260 | W | .119 | -.151 |
| H | .067 | -.314 | X | .000 | -.203 |
| J | -.067 | -.314 | Y | -.119 | -.151 |
| K | -.189 | -.260 | Z | -.178 | -.036 |
| L | -.278 | -.161 | a | -.175 | .094 |
| M | -.319 | -.034 | b | .000 | .065 |
| N | -.305 | .099 | c | .000 | -.065 |

17-35

55 #22D



| I.D. No. | Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| 1 | -.312 | .086 | 20 | -.078 | .041 | 39 | .078 | -.319 |
| 2 | -.312 | -.004 | 21 | -.078 | -.049 | 40 | .172 | .279 |
| 3 | -.312 | -.094 | 22 | -.078 | -.139 | 41 | .156 | .176 |
| 4 | -.242 | .221 | 23 | -.078 | -.229 | 42 | .156 | .086 |
| 5 | -.234 | .131 | 24 | -.078 | -.319 | 43 | .156 | -.004 |
| 6 | -.234 | .041 | 25 | .000 | .329 | 44 | .156 | -.094 |
| 7 | -.234 | -.049 | 26 | .000 | .176 | 45 | .156 | -.184 |
| 8 | -.234 | -.139 | 27 | .000 | .086 | 46 | .156 | -.274 |
| 9 | -.234 | -.229 | 28 | .000 | -.004 | 47 | .242 | .221 |
| 10 | -.172 | .279 | 29 | .000 | -.094 | 48 | .234 | .131 |
| 11 | -.156 | .176 | 30 | .000 | -.184 | 49 | .234 | .041 |
| 12 | -.156 | .086 | 31 | .000 | -.274 | 50 | .234 | -.049 |
| 13 | -.156 | -.004 | 32 | .089 | .316 | 51 | .234 | -.139 |
| 14 | -.156 | -.094 | 33 | .078 | .221 | 52 | .234 | -.229 |
| 15 | -.156 | -.184 | 34 | .078 | .131 | 53 | .312 | .086 |
| 16 | -.156 | -.274 | 35 | .078 | .041 | 54 | .312 | -.004 |
| 17 | -.089 | .316 | 36 | .078 | -.049 | 55 | .312 | -.094 |
| 18 | -.078 | .221 | 37 | .078 | -.139 | | | |
| 19 | -.078 | .131 | 38 | .078 | -.229 | | | |

PCB FOOTPRINTS


PCB Footprints: Standard

Mating face of pin insert shown (socket will be opposite)

PCB FOOTPRINTS

19-11


11 #16



| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|--------|----------|----------|--------|
| | X | Y | | X | Y |
| A | 0.105 | 0.26 | G | -0.275 | -0.053 |
| B | 0.25 | 0.132 | H | -0.25 | 0.132 |
| C | 0.275 | -0.053 | J | -0.105 | 0.26 |
| D | 0.179 | -0.215 | K | 0 | 0.105 |
| E | 0 | -0.281 | L | 0 | -0.092 |
| F | -0.179 | -0.215 | -- | -- | -- |

19-32


32 #20



| I.D. No. | -Location | | I.D. No. | Location | |
|----------|-----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .066 | .353 | T | -.066 | .353 |
| B | .189 | .305 | U | 0 | .230 |
| C | .286 | .217 | V | .124 | .193 |
| D | .345 | .098 | W | .209 | .095 |
| E | .357 | -.033 | X | .228 | -.033 |
| F | .321 | -.160 | Y | .174 | -.151 |
| G | .242 | -.265 | Z | .065 | -.221 |
| H | .130 | -.335 | a | -.065 | -.221 |
| J | 0 | -.359 | b | -.174 | -.151 |
| K | -.130 | -.335 | c | .228 | -.033 |
| L | -.242 | -.265 | d | -.209 | .095 |
| M | -.321 | -.160 | e | -.124 | .193 |
| N | -.357 | -.033 | f | 0 | .096 |
| P | -.345 | .098 | g | .096 | 0 |
| R | -.286 | .217 | h | 0 | -.096 |
| S | -.189 | .305 | j | -.096 | 0 |

19-35

66 #22D




| I.D. No. | -Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|-----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| 1 | -.357 | .090 | 23 | -.123 | -.225 | 45 | .123 | .135 |
| 2 | -.357 | .000 | 24 | -.123 | -.315 | 46 | .123 | .045 |
| 3 | -.357 | -.090 | 25 | -.045 | .360 | 47 | .123 | -.045 |
| 4 | -.279 | .225 | 26 | -.045 | .270 | 48 | .123 | -.135 |
| 5 | -.279 | .135 | 27 | -.045 | .180 | 49 | .123 | -.225 |
| 6 | -.279 | .045 | 28 | -.045 | .090 | 50 | .123 | -.315 |
| 7 | -.279 | -.045 | 29 | -.045 | .000 | 51 | .201 | .270 |
| 8 | -.279 | -.135 | 30 | -.045 | -.090 | 52 | .201 | .180 |
| 9 | -.279 | -.225 | 31 | -.045 | -.180 | 53 | .201 | .090 |
| 10 | -.201 | .270 | 32 | -.045 | -.270 | 54 | .201 | .000 |
| 11 | -.201 | .180 | 33 | -.045 | -.360 | 55 | .201 | -.090 |
| 12 | -.201 | .090 | 34 | .045 | .360 | 56 | .201 | -.180 |
| 13 | -.201 | .000 | 35 | .045 | .270 | 57 | .201 | -.270 |
| 14 | -.201 | -.090 | 36 | .045 | .180 | 58 | .279 | .225 |
| 15 | -.201 | -.180 | 37 | .045 | .090 | 59 | .279 | .135 |
| 16 | -.201 | -.270 | 38 | .045 | .000 | 60 | .279 | .045 |
| 17 | -.123 | .315 | 39 | .045 | -.090 | 61 | .279 | -.045 |
| 18 | -.123 | .225 | 40 | .045 | -.180 | 62 | .279 | -.135 |
| 19 | -.123 | .135 | 41 | .045 | -.270 | 63 | .279 | -.225 |
| 20 | -.123 | .045 | 42 | .045 | -.360 | 64 | .357 | .090 |
| 21 | -.123 | -.045 | 43 | .123 | .315 | 65 | .357 | .000 |
| 22 | -.123 | -.135 | 44 | .123 | .225 | 66 | .357 | -.090 |

PCB Footprints: Standard


Mating face of pin insert shown (socket will be opposite)

19-45
67 #22D




| I.D. No. | -Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|-----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| 1 | -.357 | .081 | 24 | -.123 | -.324 | 47 | .123 | .036 |
| 2 | -.357 | -.009 | 25 | -.088 | .360 | 48 | .123 | -.054 |
| 3 | -.357 | -.099 | 26 | .000 | .339 | 45 | .123 | -.144 |
| 4 | -.304 | .213 | 27 | -.045 | .261 | 50 | .123 | -.234 |
| 5 | -.279 | .126 | 28 | -.045 | .171 | 51 | .123 | -.324 |
| 6 | -.279 | .036 | 29 | -.045 | .081 | 52 | .244 | .280 |
| 7 | -.279 | -.054 | 30 | -.045 | -.009 | 53 | .201 | .171 |
| 8 | -.279 | -.144 | 31 | -.045 | -.099 | 54 | .201 | .081 |
| 9 | -.279 | -.234 | 32 | -.045 | -.189 | 55 | .201 | -.009 |
| 10 | -.244 | .280 | 33 | -.045 | -.279 | 56 | .201 | -.099 |
| 11 | -.201 | .171 | 34 | -.045 | -.369 | 57 | .201 | -.189 |
| 12 | -.201 | .081 | 35 | .088 | .360 | 58 | .201 | -.279 |
| 13 | -.201 | -.009 | 36 | .045 | .261 | 59 | .304 | .213 |
| 14 | -.201 | -.099 | 37 | .045 | .171 | 60 | .279 | .126 |
| 15 | -.201 | -.189 | 38 | .045 | .081 | 61 | .279 | .036 |
| 16 | -.201 | -.279 | 39 | .045 | -.009 | 62 | .279 | -.054 |
| 17 | -.156 | .301 | 40 | .045 | -.099 | 63 | .279 | -.144 |
| 18 | -.123 | .216 | 41 | .045 | -.189 | 64 | .279 | -.234 |
| 19 | -.123 | .126 | 42 | .045 | -.279 | 65 | .357 | .081 |
| 20 | -.123 | .036 | 43 | .045 | -.369 | 66 | .357 | -.009 |
| 21 | -.123 | -.054 | 44 | .156 | .301 | 67 | .357 | -.099 |
| 22 | -.123 | -.144 | 45 | .123 | .216 | | | |
| 23 | -.123 | -.234 | 46 | .123 | .126 | | | |

21-11
11 #12

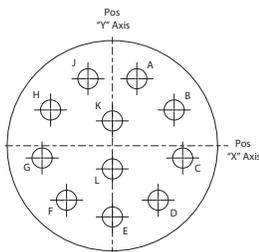

| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .121 | .332 | G | -.348 | -.061 |
| B | .306 | .177 | H | -.306 | .177 |
| C | .348 | -.061 | J | -.121 | .332 |
| D | .227 | -.270 | K | .000 | .123 |
| E | .000 | -.353 | L | .000 | -.115 |
| F | -.227 | -.270 | | | |

21-16
16 #16

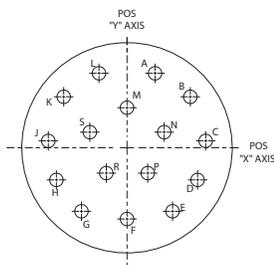

| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .118 | .322 | J | -.341 | .036 |
| B | .271 | .211 | K | -.271 | .211 |
| C | .341 | .036 | L | -.118 | .322 |
| D | .308 | -.150 | M | .000 | .175 |
| E | .182 | -.290 | N | .154 | .062 |
| F | .000 | -.343 | P | .094 | -.122 |
| G | -.182 | -.290 | R | -.094 | -.122 |
| H | -.308 | -.150 | S | -.154 | .062 |


PCB FOOTPRINTS

PCB Footprints: Standard

PCB FOOTPRINTS


Mating face of pin insert shown (socket will be opposite)

21-24
24 #20

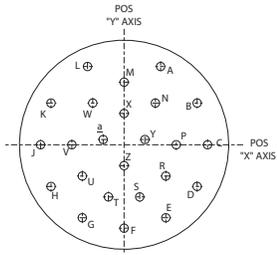


| I.D. No | -Location | | I.D. No. | Location | |
|---------|-----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .175 | .375 | P | .250 | .000 |
| B | .350 | .200 | R | .200 | -.150 |
| C | .400 | .000 | S | .075 | -.250 |
| D | .350 | .200 | T | -.075 | -.250 |
| E | .200 | .350 | U | -.200 | -.150 |
| F | .000 | .400 | V | -.250 | .000 |
| G | .200 | -.350 | W | -.150 | -.200 |
| H | -.350 | -.200 | X | .000 | .150 |
| J | -.400 | .000 | Y | .100 | .025 |
| K | -.350 | .200 | Z | .000 | -.100 |
| L | -.175 | .375 | a | -.100 | .025 |
| M | .000 | .300 | | | |
| N | .150 | .200 | | | |

21-25
25 #20

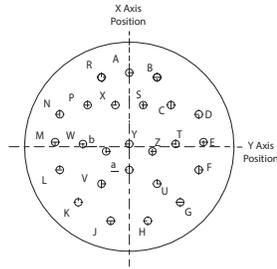

| I.D. No | -Location | | I.D. No. | Location | |
|---------|-----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .400 | P | -.225 | .225 |
| B | .150 | .375 | R | -.150 | .375 |
| C | .225 | .225 | S | .075 | -.225 |
| D | .375 | .175 | T | .250 | .075 |
| E | .400 | .025 | U | .150 | -.200 |
| F | .375 | -.125 | V | -.150 | -.200 |
| G | .275 | -.300 | W | -.250 | .075 |
| H | .100 | -.400 | X | -.075 | .225 |
| J | -.100 | -.400 | Y | .000 | .075 |
| K | -.275 | -.300 | Z | .125 | -.025 |
| L | -.375 | -.125 | a | .000 | -.125 |
| M | -.400 | .025 | b | -.125 | -.025 |
| N | -.375 | .175 | | | |

21-27
27 #20

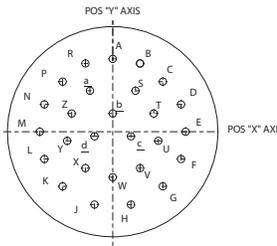


| I.D. No | -Location | | I.D. No. | Location | |
|---------|-----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .400 | R | -.150 | .375 |
| B | .150 | .375 | S | .125 | .225 |
| C | .275 | .275 | T | .225 | .100 |
| D | .375 | .150 | U | .250 | -.050 |
| E | .400 | .025 | V | -.150 | -.200 |
| F | .375 | -.150 | W | -.000 | -.250 |
| G | .275 | -.300 | X | -.150 | -.200 |
| H | .100 | -.400 | Y | -.250 | -.050 |
| J | -.100 | -.400 | Z | -.225 | -.100 |
| K | -.275 | -.300 | a | -.125 | .225 |
| L | -.375 | -.150 | b | .000 | .100 |
| M | -.400 | .000 | c | .100 | -.025 |
| N | -.375 | .150 | d | -.100 | -.025 |
| P | -.150 | .275 | | | |

PCB Footprints: Standard


Mating face of pin insert shown (socket will be opposite)

21-35
79 #22D

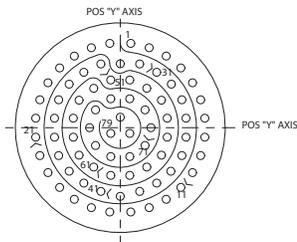

| I.D. No. | -Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|-----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| 1 | .053 | .426 | 28 | -.053 | .426 | 55 | .237 | .048 |
| 2 | .146 | .404 | 29 | .000 | .323 | 56 | .237 | -.048 |
| 3 | .232 | .362 | 30 | .098 | .322 | 57 | .208 | -.139 |
| 4 | .306 | .302 | 31 | .184 | .280 | 58 | .134 | -.199 |
| 5 | .365 | .227 | 32 | .258 | .220 | 59 | .048 | -.241 |
| 6 | .406 | .141 | 33 | .311 | .141 | 60 | -.048 | -.241 |
| 7 | .427 | .048 | 34 | .332 | .048 | 61 | -.134 | -.199 |
| 8 | .427 | -.048 | 35 | .332 | -.048 | 62 | -.208 | -.139 |
| 9 | .406 | -.141 | 36 | .311 | -.141 | 63 | -.237 | -.048 |
| 10 | .365 | -.227 | 37 | .258 | -.220 | 64 | -.237 | .048 |
| 11 | .306 | -.302 | 38 | .184 | -.280 | 65 | -.208 | .139 |
| 12 | .232 | -.362 | 39 | .098 | -.322 | 66 | -.134 | .199 |
| 13 | .146 | -.404 | 40 | .000 | -.347 | 67 | -.048 | .146 |
| 14 | .053 | -.426 | 41 | -.098 | -.322 | 68 | .048 | .146 |
| 15 | -.053 | -.426 | 42 | -.184 | -.280 | 69 | .125 | .090 |
| 16 | -.146 | -.404 | 43 | -.258 | -.220 | 70 | .155 | .000 |
| 17 | -.232 | -.362 | 44 | -.311 | -.141 | 71 | .125 | -.090 |
| 18 | -.306 | -.302 | 45 | -.332 | -.048 | 72 | .048 | -.146 |
| 19 | -.365 | -.227 | 46 | -.332 | .048 | 73 | -.048 | -.146 |
| 20 | -.406 | -.141 | 47 | -.311 | .141 | 74 | -.125 | -.090 |
| 21 | -.427 | -.048 | 48 | -.258 | .220 | 75 | -.155 | .000 |
| 22 | -.427 | .048 | 49 | -.184 | .280 | 76 | -.125 | .090 |
| 23 | -.406 | .141 | 50 | -.098 | .322 | 77 | .000 | .053 |
| 24 | -.365 | .227 | 51 | -.048 | .241 | 78 | .048 | -.029 |
| 25 | -.306 | .302 | 52 | .048 | .241 | 79 | -.048 | -.029 |
| 26 | -.232 | .362 | 53 | .134 | .199 | | | |
| 27 | -.146 | .404 | 54 | .208 | .139 | | | |

21-41
41 #20

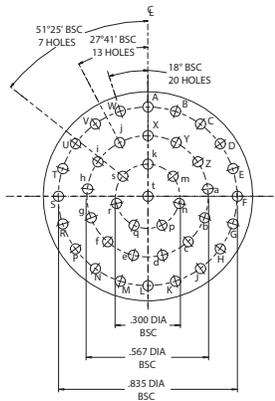


PCB Footprints: Standard

Mating face of pin insert shown (socket will be opposite)


PCB FOOTPRINTS

23-21
21 #16

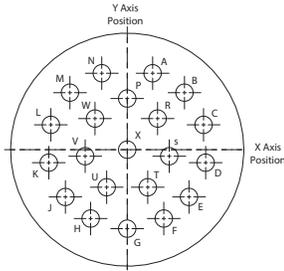


| I.D. No | Location | | I.D. No. | Location | |
|---------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .128 | .385 | M | -.289 | .285 |
| B | .289 | .285 | N | -.128 | .385 |
| C | .386 | .123 | P | .000 | .245 |
| D | .400 | -.065 | R | .160 | .146 |
| E | .328 | -.239 | S | .214 | -.035 |
| F | .183 | -.362 | T | .094 | -.194 |
| G | .000 | -.406 | U | -.094 | -.194 |
| H | -.183 | -.362 | V | -.214 | -.035 |
| J | -.328 | -.239 | W | -.160 | .146 |
| K | -.400 | -.065 | X | .000 | .000 |
| L | -.386 | .123 | | | |

23-32
32 #20

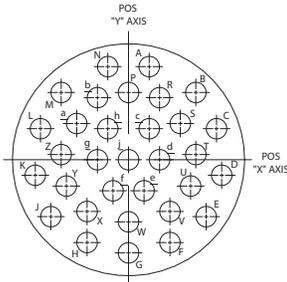

| I.D. No | Location | | I.D. No. | Location | |
|---------|---------------|---------------|----------|--------------|--------------|
| | X | Y | | X | Y |
| A | .100 (2.54) | .450 (11.43) | T | .325 (8.26) | .025 (0.64) |
| B | .325 (8.26) | .325 (8.26) | U | .300 (7.62) | -.125 (3.18) |
| C | .425 (10.80) | .150 (3.81) | V | .200 (5.08) | -.250 (6.35) |
| D | .450 (11.43) | -.075 (1.91) | W | .000 (0.00) | -.300 (7.62) |
| E | .375 (9.53) | -.275 (6.99) | X | -.200 (5.08) | -.250 (6.35) |
| F | .200 (5.08) | -.400 (10.16) | Y | -.300 (7.62) | -.125 (3.18) |
| G | .000 (0.00) | -.450 (11.43) | Z | -.325 (8.26) | .025 (0.64) |
| H | -.200 (5.08) | -.400 (10.16) | a | -.250 (6.35) | .175 (4.45) |
| J | -.375 (9.53) | -.275 (6.99) | b | -.150 (3.81) | .300 (7.62) |
| K | -.450 (11.43) | -.075 (1.91) | c | .100 (2.54) | .150 (3.81) |
| L | -.425 (10.80) | .150 (3.81) | d | .150 (3.81) | .000 (0.00) |
| M | -.325 (8.26) | .325 (8.26) | e | .075 (1.91) | -.150 (3.81) |
| N | -.100 (2.54) | .450 (11.43) | f | -.075 (1.91) | -.150 (3.81) |
| P | .000 (0.00) | .325 (8.26) | g | -.150 (3.81) | .000 (0.00) |
| R | .150 (3.81) | .300 (7.62) | h | -.100 (2.54) | .150 (3.81) |
| S | .250 (6.35) | .175 (4.45) | J | .000 (0.00) | .000 (0.00) |

23-34
34 #20

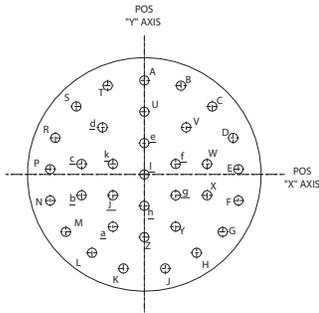


| I.D. No | Location | | I.D. No. | Location | |
|---------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .450 | U | .000 | .300 |
| B | .175 | .425 | V | .200 | .225 |
| C | .325 | .325 | W | .300 | .050 |
| D | .425 | .175 | X | .300 | -.100 |
| E | .450 | .025 | Y | .150 | -.250 |
| F | .450 | -.125 | Z | .000 | -.300 |
| G | .375 | -.275 | a | -.150 | -.25 |
| H | .250 | -.375 | b | -.300 | -.100 |
| J | .100 | -.450 | c | -.300 | .050 |
| K | -.100 | -.450 | d | -.200 | .225 |
| L | -.250 | -.375 | e | .000 | .150 |
| M | -.375 | -.275 | f | .150 | .050 |
| N | -.450 | -.125 | g | .150 | -.100 |
| P | -.450 | .025 | h | .000 | -.150 |
| R | -.425 | .175 | j | -.150 | -.100 |
| S | -.325 | .325 | k | -.150 | .050 |
| T | -.175 | .425 | l | .000 | .000 |

PCB Footprints: Standard


Mating face of pin insert shown (socket will be opposite)

23-35
100 #22D

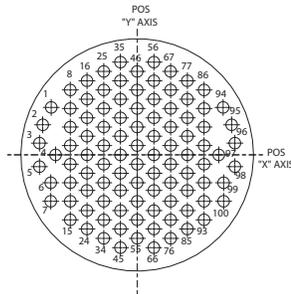

| I.D. No. | Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| 1 | -.428 | .241 | 34 | -.166 | -.427 | 67 | .166 | .428 |
| 2 | -.467 | .154 | 35 | -.083 | .475 | 68 | .166 | .333 |
| 3 | -.488 | .061 | 36 | -.083 | .380 | 69 | .166 | .238 |
| 4 | -.415 | .000 | 37 | -.083 | .285 | 70 | .166 | .143 |
| 5 | -.488 | -.061 | 38 | -.083 | .190 | 71 | .166 | .048 |
| 6 | -.428 | -.142 | 39 | -.083 | .095 | 72 | .166 | -.047 |
| 7 | -.428 | -.237 | 40 | -.083 | .000 | 73 | .166 | -.142 |
| 8 | -.332 | .333 | 41 | -.083 | -.095 | 74 | .166 | -.237 |
| 9 | -.332 | .238 | 42 | -.083 | -.190 | 75 | .166 | -.332 |
| 10 | -.332 | .143 | 43 | -.083 | -.285 | 76 | .166 | -.427 |
| 11 | -.332 | .048 | 44 | -.083 | -.380 | 77 | .249 | .380 |
| 12 | -.332 | -.047 | 45 | -.083 | -.475 | 78 | .249 | .285 |
| 13 | -.332 | -.142 | 46 | .000 | .428 | 79 | .249 | .190 |
| 14 | -.332 | -.237 | 47 | .000 | .333 | 80 | .249 | .095 |
| 15 | -.332 | -.332 | 48 | .000 | .238 | 81 | .249 | .000 |
| 16 | -.249 | .380 | 49 | .000 | .143 | 82 | .249 | -.095 |
| 17 | -.249 | .285 | 50 | .000 | .048 | 83 | .249 | -.190 |
| 18 | -.249 | .190 | 51 | .000 | -.047 | 84 | .249 | -.285 |
| 19 | -.249 | .095 | 52 | .000 | -.142 | 85 | .249 | -.380 |
| 20 | -.249 | .000 | 53 | .000 | -.237 | 86 | .332 | .333 |
| 21 | -.249 | -.095 | 54 | .000 | -.332 | 87 | .332 | .238 |
| 22 | -.249 | -.190 | 55 | .000 | -.427 | 88 | .332 | .143 |
| 23 | -.249 | -.285 | 56 | .083 | .475 | 89 | .332 | .048 |
| 24 | -.249 | -.380 | 57 | .083 | .380 | 90 | .332 | -.047 |
| 25 | -.166 | .428 | 58 | .083 | .285 | 91 | .332 | -.142 |
| 26 | -.166 | .333 | 59 | .083 | .190 | 92 | .332 | -.237 |
| 27 | -.166 | .238 | 60 | .083 | .095 | 93 | .332 | -.332 |
| 28 | -.166 | .143 | 61 | .083 | .000 | 94 | .428 | .241 |
| 29 | -.166 | .048 | 62 | .083 | -.095 | 95 | .467 | .154 |
| 30 | -.166 | -.047 | 63 | .083 | -.190 | 96 | .488 | .061 |
| 31 | -.166 | -.142 | 64 | .083 | -.285 | 97 | .415 | .000 |
| 32 | -.166 | -.237 | 65 | .083 | -.380 | 98 | .488 | -.061 |
| 33 | -.166 | -.332 | 66 | .083 | -.475 | 99 | .428 | -.142 |
| | | | | | | 100 | .428 | -.237 |

23-36
36 #20

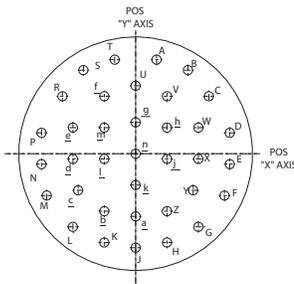

| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .100 | .450 | V | .150 | .275 |
| B | .250 | .400 | W | .300 | .125 |
| C | .350 | .275 | X | .300 | -.025 |
| D | .450 | .100 | Y | .275 | -.175 |
| E | .450 | -.050 | Z | .150 | -.275 |
| F | .425 | -.200 | a | .000 | -.300 |
| G | .300 | -.350 | b | -.150 | -.275 |
| H | .150 | -.425 | c | -.275 | -.175 |
| J | .000 | -.450 | d | -.300 | -.025 |
| K | -.150 | -.425 | e | -.300 | .125 |
| L | -.300 | -.350 | f | -.150 | .275 |
| M | -.425 | -.200 | g | .000 | .150 |
| N | -.450 | -.050 | h | .150 | .125 |
| P | -.450 | .100 | j | .150 | -.025 |
| R | -.350 | .275 | k | .000 | -.150 |
| S | -.250 | .400 | l | -.150 | -.025 |
| T | -.100 | .450 | m | -.150 | .125 |
| U | .000 | .325 | n | .000 | .000 |


PCB FOOTPRINTS

PCB Footprints: Standard

PCB FOOTPRINTS


Mating face of pin insert shown (socket will be opposite)

23-53
53 #20

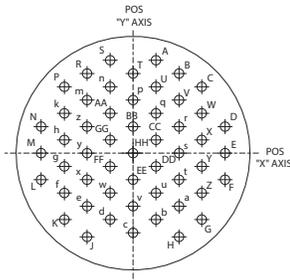

| I.D. No. | Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| A | .112 | .455 | V | .225 | .260 | r | .225 | .130 |
| B | .225 | .390 | W | .336 | .195 | s | .225 | .000 |
| C | .336 | .325 | X | .336 | .065 | t | .225 | -.130 |
| D | .450 | .130 | Y | .336 | -.065 | u | .112 | -.195 |
| E | .450 | .000 | Z | .336 | -.195 | v | .000 | -.260 |
| F | .450 | -.130 | a | .225 | -.260 | w | -.112 | -.195 |
| G | .336 | -.325 | b | .112 | -.325 | x | -.225 | -.130 |
| H | .225 | -.410 | c | .000 | -.390 | y | -.225 | .000 |
| J | -.225 | -.410 | d | -.112 | -.325 | z | -.225 | .130 |
| K | -.336 | -.325 | e | -.225 | -.260 | AA | -.112 | .195 |
| L | -.450 | -.130 | f | -.336 | -.195 | BB | .000 | .130 |
| M | -.450 | .000 | g | -.336 | -.065 | CC | .112 | .065 |
| N | -.450 | .130 | h | -.336 | .065 | DD | .112 | -.065 |
| P | -.336 | .325 | k | -.336 | .195 | EE | .000 | -.130 |
| R | -.225 | .390 | m | -.225 | .260 | FF | -.112 | -.065 |
| S | -.112 | .455 | n | -.112 | .325 | GG | -.112 | .065 |
| T | .000 | .390 | p | .000 | .260 | HH | .000 | .000 |
| U | .112 | .325 | q | .112 | .195 | | | |

23-55
55 #20

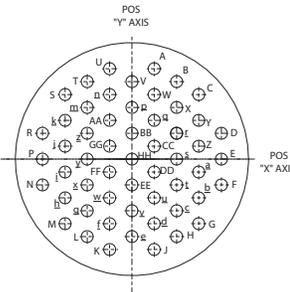


| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .112 | .455 | f | -.225 | -.325 |
| B | .225 | .390 | g | -.336 | -.260 |
| C | .336 | .325 | h | -.336 | -.195 |
| D | .450 | .130 | i | -.336 | -.065 |
| E | .450 | .000 | j | -.336 | .065 |
| F | .450 | -.130 | k | -.336 | .195 |
| G | .336 | -.325 | m | -.225 | .260 |
| H | .225 | -.390 | n | -.112 | .325 |
| J | .112 | -.455 | p | .000 | .260 |
| K | -.112 | -.455 | q | .112 | .195 |
| L | -.225 | -.390 | r | .225 | .130 |
| M | -.336 | -.325 | s | .225 | .000 |
| N | -.450 | -.130 | t | .225 | -.130 |
| P | -.450 | .000 | u | .112 | -.195 |
| R | -.450 | .130 | v | .000 | -.260 |
| S | -.336 | .325 | w | -.112 | -.195 |
| T | -.225 | .390 | x | -.225 | -.130 |
| U | -.112 | .455 | y | -.225 | .000 |
| V | .000 | .390 | z | -.225 | .130 |
| W | .112 | .325 | AA | -.112 | .195 |
| X | .225 | .260 | BB | .000 | .130 |
| Y | .336 | .195 | CC | .112 | .065 |
| Z | .336 | .065 | DD | .112 | -.065 |
| a | .336 | -.065 | EE | .000 | -.130 |
| b | .336 | -.195 | FF | -.112 | -.065 |
| c | .225 | -.260 | GG | -.112 | .065 |
| d | .112 | -.325 | HH | .000 | .000 |
| e | -.000 | -.390 | | | |

PCB Footprints: Standard


Mating face of pin insert shown (socket will be opposite)

23-97
16 #16

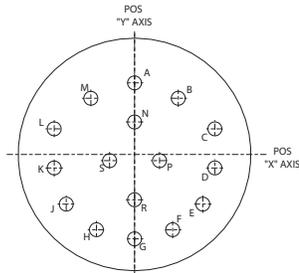


| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .344 | J | -.328 | -.239 |
| B | .210 | .270 | K | -.400 | -.065 |
| C | .386 | .123 | L | -.386 | .123 |
| D | .400 | -.065 | M | -.210 | .270 |
| E | .328 | -.239 | N | .000 | .156 |
| F | .183 | -.362 | P | .120 | -.030 |
| G | .000 | -.406 | R | .000 | -.218 |
| H | -.183 | -.362 | S | -.120 | -.030 |

23-99
11 #16

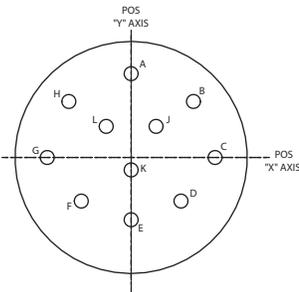


| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .404 | G | -.404 | .000 |
| B | .300 | .270 | H | -.300 | .270 |
| C | .404 | .000 | J | .120 | .150 |
| D | .240 | -.210 | K | .000 | -.060 |
| E | .000 | -.300 | L | -.120 | .150 |
| F | -.240 | -.210 | | | |

25-19
19 #12

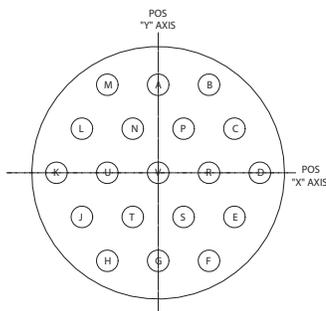

| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | 0 | .409 | L | -.354 | .205 |
| B | .236 | .409 | M | -.236 | .409 |
| C | .354 | .205 | N | -.118 | .205 |
| D | .472 | 0 | P | .118 | .205 |
| E | .354 | -.205 | R | .236 | 0 |
| F | .236 | -.409 | S | .118 | -.205 |
| G | 0 | -.409 | T | -.118 | -.205 |
| H | -.236 | -.409 | U | -.236 | 0 |
| J | -.354 | -.205 | V | 0 | 0 |
| K | -.472 | 0 | | | |

25-29
29 #16

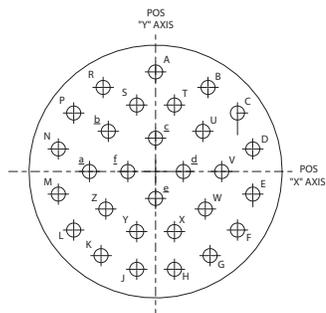

| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .000 | .481 | S | -.091 | .321 |
| B | .258 | .406 | T | .091 | .321 |
| C | .395 | .277 | U | .228 | .194 |
| D | .469 | .109 | V | .319 | .000 |
| E | .469 | -.109 | W | .240 | -.181 |
| F | .395 | -.277 | X | .091 | -.290 |
| G | .263 | -.406 | Y | -.091 | -.290 |
| H | .091 | -.472 | Z | -.240 | -.181 |
| J | -.091 | -.472 | a | -.319 | .000 |
| K | -.263 | -.406 | b | -.228 | .194 |
| L | -.395 | -.277 | c | .000 | .161 |
| M | -.469 | -.109 | d | .134 | .000 |
| N | -.469 | .109 | e | .000 | -.130 |
| P | -.395 | .277 | f | -.134 | .000 |
| R | -.258 | .406 | | | |


PCB FOOTPRINTS

PCB Footprints: Standard

Mating face of pin insert shown (socket will be opposite)

PCB FOOTPRINTS

25-35
 128 #22D

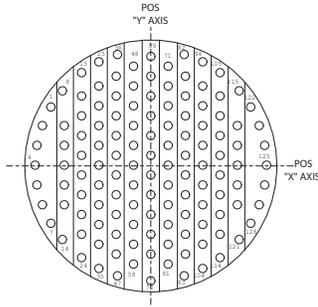


| I.D. No. | Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| 1 | -.479 | .279 | 44 | -.166 | -.237 | 87 | .166 | .047 |
| 2 | -.520 | .190 | 45 | -.166 | -.332 | 88 | .166 | -.047 |
| 3 | -.546 | .095 | 46 | -.166 | -.427 | 89 | .166 | -.142 |
| 4 | -.555 | .000 | 47 | -.166 | -.522 | 90 | .166 | -.237 |
| 5 | -.546 | -.095 | 48 | -.083 | .475 | 91 | .166 | -.332 |
| 6 | -.520 | -.190 | 49 | -.083 | .380 | 92 | .166 | -.427 |
| 7 | -.479 | -.279 | 50 | -.083 | .285 | 93 | .166 | -.522 |
| 8 | -.424 | .357 | 51 | -.083 | .190 | 94 | .249 | .496 |
| 9 | -.415 | .190 | 52 | -.083 | .095 | 95 | .249 | .380 |
| 10 | -.415 | .095 | 53 | -.083 | .000 | 96 | .249 | .285 |
| 11 | -.415 | .000 | 54 | -.083 | -.095 | 97 | .249 | .190 |
| 12 | -.415 | -.095 | 55 | -.083 | -.190 | 98 | .249 | -.095 |
| 13 | -.415 | -.190 | 56 | -.083 | -.285 | 99 | .249 | .000 |
| 14 | -.424 | -.357 | 57 | -.083 | -.380 | 100 | .249 | -.095 |
| 15 | -.332 | .444 | 58 | -.083 | -.475 | 101 | .249 | -.190 |
| 16 | -.332 | .332 | 59 | .000 | .522 | 102 | .249 | -.285 |
| 17 | -.332 | .237 | 60 | .000 | .427 | 103 | .249 | -.380 |
| 18 | -.332 | .142 | 61 | .000 | .332 | 104 | .249 | -.475 |
| 19 | -.332 | .047 | 62 | .000 | .237 | 105 | .332 | .444 |
| 20 | -.332 | -.047 | 63 | .000 | .142 | 106 | .332 | .332 |
| 21 | -.332 | -.142 | 64 | .000 | .047 | 107 | .332 | .237 |
| 22 | -.332 | -.237 | 65 | .000 | -.047 | 108 | .332 | .142 |
| 23 | -.332 | -.332 | 66 | .000 | -.142 | 109 | .332 | .047 |
| 24 | -.332 | -.427 | 67 | .000 | -.237 | 110 | .332 | -.047 |
| 25 | -.249 | .496 | 68 | .000 | -.332 | 111 | .332 | -.142 |
| 26 | -.249 | .380 | 69 | .000 | -.427 | 112 | .332 | -.237 |
| 27 | -.249 | .285 | 70 | .000 | -.522 | 113 | .332 | -.332 |
| 28 | -.249 | .190 | 71 | .083 | .475 | 114 | .332 | -.427 |
| 29 | -.249 | .095 | 72 | .083 | .380 | 115 | .424 | .357 |
| 30 | -.249 | .000 | 73 | .083 | .285 | 116 | .415 | .190 |
| 31 | -.249 | -.095 | 74 | .083 | .190 | 117 | .415 | .095 |
| 32 | -.249 | -.190 | 75 | .083 | .095 | 118 | .415 | .000 |
| 33 | -.249 | -.285 | 76 | .083 | .000 | 119 | .415 | -.095 |
| 34 | -.249 | -.380 | 77 | .083 | -.095 | 120 | .415 | -.190 |
| 35 | -.249 | -.475 | 78 | .083 | -.190 | 121 | .424 | -.357 |
| 36 | -.166 | .531 | 79 | .083 | -.285 | 122 | .479 | .279 |
| 37 | -.166 | .427 | 80 | .083 | -.380 | 123 | .520 | .190 |
| 38 | -.166 | .332 | 81 | .083 | -.475 | 124 | .546 | .095 |
| 39 | -.166 | .237 | 82 | .160 | .531 | 125 | .555 | .000 |
| 40 | -.166 | .142 | 83 | .166 | .427 | 126 | .546 | -.095 |
| 41 | -.166 | .047 | 84 | .166 | .332 | 127 | .520 | -.190 |
| 42 | -.166 | -.047 | 85 | .166 | .237 | 128 | .479 | -.279 |
| 43 | -.166 | -.142 | 86 | .166 | .142 | | | |

PCB Footprints: Standard

Mating face of pin insert shown (socket will be opposite)

25-37


37 #16

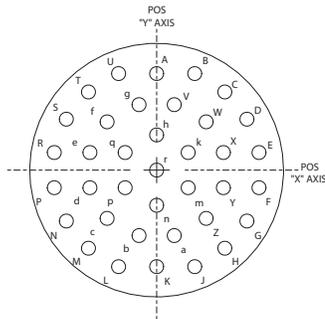

| I.D. No. | Location | | I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y | | X | Y |
| A | .000 | .472 | P | -.500 | -.086 | d | -.326 | -.086 |
| B | .186 | .472 | R | -.500 | .086 | e | -.326 | .086 |
| C | .333 | .382 | S | -.441 | .249 | f | -.242 | .236 |
| D | .441 | .249 | T | -.333 | .382 | g | -.086 | .320 |
| E | .500 | .086 | U | -.186 | .472 | h | .000 | .172 |
| F | .500 | -.086 | V | .086 | .320 | k | .154 | .086 |
| G | .441 | -.249 | W | .242 | .236 | m | .154 | -.086 |
| H | .333 | -.382 | X | .326 | .086 | n | .000 | -.172 |
| J | .186 | -.472 | Y | .326 | -.086 | p | -.154 | -.086 |
| K | .000 | -.472 | Z | .242 | -.236 | q | -.154 | .086 |
| L | -.186 | -.472 | a | .086 | -.320 | r | .000 | .000 |
| M | -.333 | -.382 | b | -.086 | -.320 | | | |
| N | -.441 | -.249 | c | -.242 | -.236 | | | |

25-61

61 #20

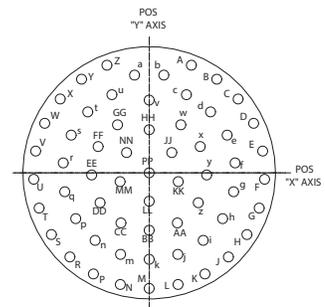

| I.D. No. | Location | | I.D. No. | Location | |
|----------|----------|-------|----------|----------|-------|
| | X | Y | | X | Y |
| A | .196 | .500 | i | .251 | -.314 |
| B | .314 | .435 | j | .133 | -.379 |
| C | .413 | .343 | k | .000 | -.402 |
| D | .485 | .230 | m | -.133 | -.379 |
| E | .527 | .101 | n | -.251 | -.314 |
| F | .536 | -.030 | p | -.341 | -.213 |
| G | .511 | -.164 | q | -.392 | -.088 |
| H | .454 | -.287 | r | -.399 | .046 |
| J | .368 | -.391 | s | -.362 | .175 |
| K | .259 | -.470 | t | -.285 | .283 |
| L | .134 | -.519 | u | -.173 | .363 |
| M | .000 | -.537 | v | .000 | .338 |
| N | -.134 | -.519 | w | .147 | .223 |
| P | -.259 | -.470 | x | .237 | .122 |
| R | -.368 | -.391 | y | .267 | -.010 |
| S | -.454 | -.287 | z | .228 | -.139 |
| T | -.511 | -.164 | AA | .131 | -.233 |
| U | -.536 | -.030 | BB | .000 | -.267 |
| V | -.527 | .101 | CC | -.131 | -.233 |
| W | -.485 | .230 | DD | -.228 | -.139 |
| X | -.413 | .343 | EE | -.267 | -.010 |
| Y | -.314 | .435 | FF | -.237 | .122 |
| Z | -.196 | .500 | GG | -.147 | .223 |
| a | -.068 | .454 | HH | .000 | .200 |
| b | .068 | .454 | JJ | .105 | .094 |
| c | .173 | .363 | KK | .135 | -.041 |
| d | .285 | .283 | LL | .000 | -.132 |
| e | .362 | .175 | MM | -.135 | -.041 |
| f | .399 | .046 | NN | -.105 | .094 |
| g | .392 | -.088 | PP | .000 | .000 |
| h | .341 | -.213 | | | |


PCB FOOTPRINTS

PCB Footprints: Combo

PCB FOOTPRINTS


Mating face of pin insert shown (socket will be opposite)

15-15
 1x #16
 14X #20

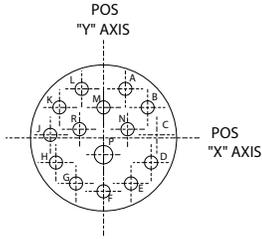


| I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|
| | X | Y | |
| A | 0.100 | 0.225 | NO. 20 |
| B | 0.202 | 0.140 | NO. 20 |
| C | 0.244 | 0.014 | NO. 20 |
| D | 0.218 | -0.113 | NO. 20 |
| E | 0.126 | -0.209 | NO. 20 |
| F | 0.000 | -0.245 | NO. 20 |
| G | -0.126 | -0.209 | NO. 20 |
| H | -0.218 | -0.113 | NO. 20 |
| J | -0.244 | 0.014 | NO. 20 |
| K | -0.202 | 0.140 | NO. 20 |
| L | -0.100 | 0.225 | NO. 20 |
| M | 0.000 | 0.140 | NO. 20 |
| N | 0.110 | 0.040 | NO. 20 |
| P | 0.000 | -0.077 | NO. 16 |
| R | -0.110 | 0.040 | NO. 20 |

15-97
 4X #16
 8X #20

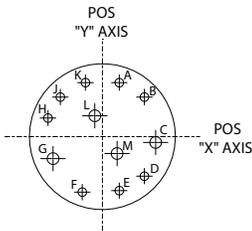

| I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|
| | X | Y | |
| A | 0.065 | 0.234 | NO. 16 |
| B | 0.178 | 0.178 | NO. 16 |
| C | 0.230 | -0.023 | NO. 20 |
| D | 0.178 | -0.178 | NO. 16 |
| E | 0.065 | -0.234 | NO. 16 |
| F | -0.089 | -0.235 | NO. 16 |
| G | -0.207 | -0.095 | NO. 20 |
| H | -0.234 | 0.065 | NO. 16 |
| J | -0.178 | 0.178 | NO. 16 |
| K | -0.065 | 0.234 | NO. 16 |
| L | -0.047 | 0.081 | NO. 20 |
| M | 0.047 | -0.081 | NO. 20 |

17-99
 2X #16
 37X #20

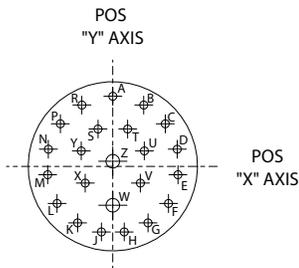


| I.D. NO. | LOCATION | | | I.D. NO. | LOCATION | | |
|----------|----------|--------|--------|----------|----------|--------|--------|
| | X | Y | GAGE | | X | Y | GAGE |
| A | 0.000 | 0.321 | NO. 20 | N | -0.305 | 0.099 | NO. 20 |
| B | 0.131 | 0.293 | NO. 20 | P | -0.239 | 0.214 | NO. 20 |
| C | 0.239 | 0.214 | NO. 20 | R | -0.131 | 0.293 | NO. 20 |
| D | 0.305 | 0.099 | NO. 20 | S | -0.070 | 0.177 | NO. 20 |
| E | 0.319 | -0.034 | NO. 20 | T | 0.070 | 0.177 | NO. 20 |
| F | 0.278 | -0.161 | NO. 20 | U | 0.175 | 0.094 | NO. 20 |
| G | 0.189 | -0.260 | NO. 20 | V | 0.150 | -0.075 | NO. 20 |
| H | 0.067 | -0.314 | NO. 20 | W | 0.000 | -0.161 | NO. 16 |
| J | -0.067 | -0.314 | NO. 20 | X | -0.150 | -0.075 | NO. 20 |
| K | -0.189 | -0.260 | NO. 20 | Y | -0.175 | 0.094 | NO. 20 |
| L | -0.278 | -0.161 | NO. 20 | Z | 0.000 | 0.025 | NO. 16 |
| M | -0.319 | -0.034 | NO. 20 | | | | |

PCB Footprints: Combo


Mating face of pin insert shown (socket will be opposite)

19-28
2X #16
26X #20

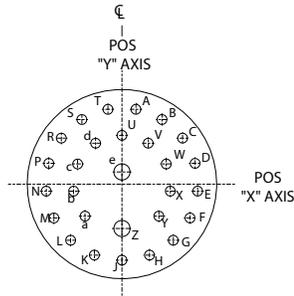

| I.D. NO. | LOCATION | | GAGE | I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|----------|----------|--------|--------|
| | X | Y | | | X | Y | |
| A | 0.066 | 0.353 | NO. 20 | R | -0.286 | 0.217 | NO. 20 |
| B | 0.189 | 0.305 | NO. 20 | S | -0.189 | 0.305 | NO. 20 |
| C | 0.286 | 0.217 | NO. 20 | T | -0.066 | 0.353 | NO. 20 |
| D | 0.345 | 0.098 | NO. 20 | U | 0 | 0.230 | NO. 20 |
| E | 0.357 | -0.033 | NO. 20 | V | 0.124 | 0.193 | NO. 20 |
| F | 0.321 | -0.160 | NO. 20 | W | 0.209 | 0.095 | NO. 20 |
| G | 0.242 | -0.265 | NO. 20 | X | 0.228 | -0.033 | NO. 20 |
| H | 0.130 | -0.335 | NO. 20 | Y | 0.174 | -0.151 | NO. 20 |
| J | 0 | -0.359 | NO. 20 | Z | 0 | -0.191 | NO. 16 |
| K | -0.130 | -0.335 | NO. 20 | a | -0.174 | -0.151 | NO. 20 |
| L | -0.242 | -0.265 | NO. 20 | b | -0.228 | -0.033 | NO. 20 |
| M | -0.321 | -0.160 | NO. 20 | c | -0.209 | 0.095 | NO. 20 |
| N | -0.357 | -0.033 | NO. 20 | d | -0.124 | 0.193 | NO. 20 |
| P | -0.345 | 0.098 | NO. 20 | e | 0 | 0.062 | NO. 16 |

19-30
1X #16
29X #20

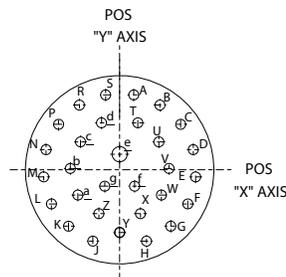

| I.D. NO. | LOCATION | | GAGE | I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|----------|----------|--------|--------|
| | X | Y | | | X | Y | |
| A | 0.065 | 0.346 | NO. 20 | S | -0.065 | 0.346 | NO. 20 |
| B | 0.186 | 0.299 | NO. 20 | T | 0.084 | 0.217 | NO. 20 |
| C | 0.282 | 0.210 | NO. 20 | U | 0.181 | 0.129 | NO. 20 |
| D | 0.340 | 0.093 | NO. 20 | V | 0.228 | 0.008 | NO. 20 |
| E | 0.351 | -0.033 | NO. 20 | W | 0.193 | -0.117 | NO. 20 |
| F | 0.315 | -0.158 | NO. 20 | X | 0.096 | -0.203 | NO. 20 |
| G | 0.236 | -0.261 | NO. 20 | Y | 0.000 | -0.290 | NO. 20 |
| H | 0.124 | -0.330 | NO. 20 | Z | -0.096 | -0.203 | NO. 20 |
| J | -0.124 | -0.330 | NO. 20 | a | -0.193 | -0.117 | NO. 20 |
| K | -0.236 | -0.261 | NO. 20 | b | -0.228 | 0.008 | NO. 20 |
| L | -0.315 | -0.158 | NO. 20 | c | -0.181 | 0.129 | NO. 20 |
| M | -0.351 | -0.033 | NO. 20 | d | -0.084 | 0.217 | NO. 20 |
| N | -0.340 | 0.093 | NO. 20 | e | 0.000 | 0.072 | NO. 16 |
| P | -0.282 | 0.210 | NO. 20 | f | 0.069 | -0.076 | NO. 20 |
| R | -0.186 | 0.299 | NO. 20 | g | -0.069 | -0.076 | NO. 20 |


PCB FOOTPRINTS

PCB Footprints: Combo

PCB FOOTPRINTS


Mating face of pin insert shown (socket will be opposite)

21-29
4X #12
4X #16
19X #20

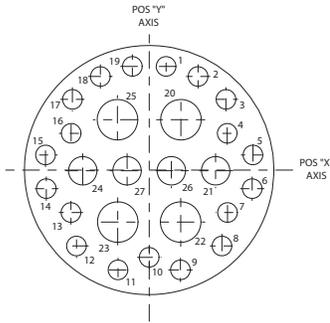

| I.D. NO. | LOCATION | | GAGE | I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|----------|----------|--------|--------|
| | X | Y | | | X | Y | |
| 1 | +0.067 | +0.412 | NO. 20 | 15 | -0.412 | +0.060 | NO. 20 |
| 2 | +0.194 | +0.372 | NO. 20 | 16 | -0.310 | +0.146 | NO. 20 |
| 3 | +0.305 | +0.281 | NO. 20 | 17 | -0.305 | +0.281 | NO. 20 |
| 4 | +0.310 | +0.146 | NO. 20 | 18 | -0.194 | +0.372 | NO. 20 |
| 5 | +0.412 | +0.060 | NO. 20 | 19 | -0.067 | +0.412 | NO. 20 |
| 6 | +0.409 | -0.074 | NO. 20 | 20 | +0.126 | +0.200 | NO. 12 |
| 7 | +0.311 | -0.169 | NO. 20 | 21 | +0.264 | -0.003 | NO. 16 |
| 8 | +0.289 | -0.302 | NO. 20 | 22 | +0.125 | -0.207 | NO. 12 |
| 9 | +0.124 | -0.397 | NO. 20 | 23 | -0.125 | -0.207 | NO. 12 |
| 10 | 0.000 | -0.347 | NO. 20 | 24 | -0.264 | -0.003 | NO. 16 |
| 11 | -0.124 | -0.397 | NO. 20 | 25 | -0.126 | +0.200 | NO. 12 |
| 12 | -0.289 | -0.302 | NO. 20 | 26 | +0.088 | -0.003 | NO. 16 |
| 13 | -0.311 | -0.169 | NO. 20 | 27 | -0.088 | -0.003 | NO. 16 |
| 14 | -0.409 | -0.074 | NO. 20 | | | | |

21-39
2X #16
37X #20

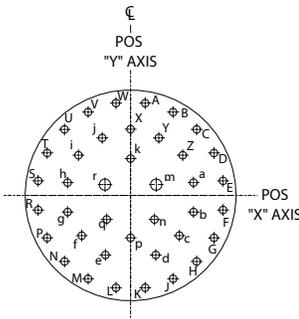


| I.D. NO. | LOCATION | | GAGE | I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|----------|----------|--------|--------|
| | X | Y | | | X | Y | |
| A | 0.065 | 0.411 | NO. 20 | a | 0.280 | 0.057 | NO. 20 |
| B | 0.189 | 0.371 | NO. 20 | b | 0.280 | -0.074 | NO. 20 |
| C | 0.294 | 0.294 | NO. 20 | c | 0.217 | -0.189 | NO. 20 |
| D | 0.371 | 0.189 | NO. 20 | d | 0.112 | -0.265 | NO. 20 |
| E | 0.411 | 0.065 | NO. 20 | e | -0.112 | -0.265 | NO. 20 |
| F | 0.411 | -0.065 | NO. 20 | f | -0.217 | -0.189 | NO. 20 |
| G | 0.371 | -0.189 | NO. 20 | g | -0.280 | -0.074 | NO. 20 |
| H | 0.294 | -0.294 | NO. 20 | h | -0.280 | 0.057 | NO. 20 |
| J | 0.189 | -0.371 | NO. 20 | i | -0.232 | 0.179 | NO. 20 |
| K | 0.065 | -0.411 | NO. 20 | j | -0.126 | 0.256 | NO. 20 |
| L | -0.065 | -0.411 | NO. 20 | k | 0 | 0.164 | NO. 20 |
| M | -0.189 | -0.371 | NO. 20 | m | 0.114 | 0.048 | NO. 16 |
| N | -0.294 | -0.294 | NO. 20 | n | 0.106 | -0.107 | NO. 20 |
| P | -0.371 | -0.189 | NO. 20 | p | 0 | -0.189 | NO. 20 |
| R | -0.411 | -0.065 | NO. 20 | q | -0.106 | -0.107 | NO. 20 |
| S | -0.411 | 0.065 | NO. 20 | r | -0.114 | 0.048 | NO. 16 |
| T | -0.371 | 0.189 | NO. 20 | | | | |
| U | -0.294 | 0.294 | NO. 20 | | | | |
| V | -0.189 | 0.371 | NO. 20 | | | | |
| W | -0.065 | 0.411 | NO. 20 | | | | |
| X | 0 | 0.295 | NO. 20 | | | | |
| Y | 0.126 | 0.256 | NO. 20 | | | | |
| Z | 0.232 | 0.179 | NO. 20 | | | | |

PCB Footprints: Combo


Mating face of pin insert shown (socket will be opposite)

25-4
8X #16
48X #20

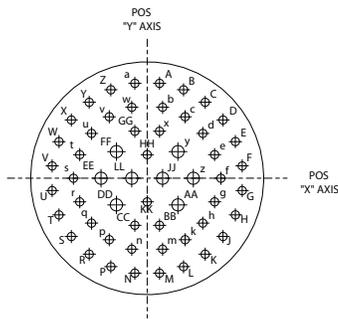

| I.D. NO. | LOCATION | | GAGE | I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|----------|----------|--------|--------|
| | X | Y | | | X | Y | |
| A | 0.069 | 0.531 | NO. 20 | f | 0.412 | 0.000 | NO. 20 |
| B | 0.203 | 0.495 | NO. 20 | g | 0.377 | -0.132 | NO. 20 |
| C | 0.324 | 0.425 | NO. 20 | h | 0.311 | -0.251 | NO. 20 |
| D | 0.424 | 0.326 | NO. 20 | k | 0.212 | -0.344 | NO. 20 |
| E | 0.493 | 0.205 | NO. 20 | m | 0.086 | -0.397 | NO. 20 |
| F | 0.531 | 0.069 | NO. 20 | n | -0.086 | -0.397 | NO. 20 |
| G | 0.531 | -0.069 | NO. 20 | p | -0.212 | -0.344 | NO. 20 |
| H | 0.493 | -0.205 | NO. 20 | q | -0.311 | -0.251 | NO. 20 |
| J | 0.424 | -0.326 | NO. 20 | r | -0.377 | -0.132 | NO. 20 |
| K | 0.324 | -0.425 | NO. 20 | s | -0.412 | 0.000 | NO. 20 |
| L | 0.203 | -0.495 | NO. 20 | t | -0.377 | 0.132 | NO. 20 |
| M | 0.069 | -0.531 | NO. 20 | u | -0.311 | 0.251 | NO. 20 |
| N | -0.069 | -0.531 | NO. 20 | v | -0.212 | 0.344 | NO. 20 |
| P | -0.203 | -0.495 | NO. 20 | w | -0.086 | 0.397 | NO. 20 |
| R | -0.324 | -0.425 | NO. 20 | x | 0.069 | 0.263 | NO. 20 |
| S | -0.424 | -0.326 | NO. 20 | y | 0.172 | 0.149 | NO. 20 |
| T | -0.493 | -0.205 | NO. 20 | z | 0.258 | 0.000 | NO. 20 |
| U | -0.531 | -0.069 | NO. 20 | AA | 0.172 | -0.149 | NO. 16 |
| V | -0.531 | 0.069 | NO. 20 | BB | 0.069 | -0.263 | NO. 16 |
| W | -0.493 | 0.205 | NO. 20 | CC | -0.069 | -0.263 | NO. 16 |
| X | -0.424 | 0.326 | NO. 20 | DD | -0.172 | -0.149 | NO. 16 |
| Y | -0.324 | 0.425 | NO. 20 | EE | -0.258 | 0.000 | NO. 16 |
| Z | -0.203 | 0.495 | NO. 20 | FF | -0.172 | 0.149 | NO. 16 |
| a | -0.069 | 0.531 | NO. 20 | GG | -0.069 | 0.263 | NO. 16 |
| b | 0.086 | 0.397 | NO. 20 | HH | 0.000 | 0.132 | NO. 16 |
| c | 0.212 | 0.344 | NO. 20 | JJ | 0.086 | 0.000 | NO. 16 |
| d | 0.311 | 0.251 | NO. 20 | KK | 0.000 | -0.132 | NO. 16 |
| e | 0.377 | 0.132 | NO. 20 | LL | -0.086 | 0.000 | NO. 16 |

25-24
12X #16
12X #12

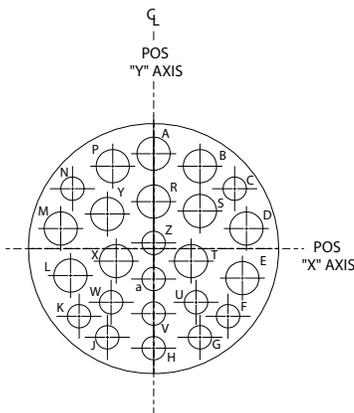

| I.D. NO. | LOCATION | | GAGE | I.D. NO. | LOCATION | | GAGE |
|----------|----------|--------|--------|----------|----------|--------|--------|
| | X | Y | | | X | Y | |
| A | +0.000 | +0.472 | NO. 12 | N | -0.403 | +0.298 | NO. 16 |
| B | +0.230 | +0.410 | NO. 12 | P | -0.230 | +0.410 | NO. 12 |
| C | +0.403 | +0.298 | NO. 16 | R | +0.000 | +0.234 | NO. 12 |
| D | +0.461 | +0.100 | NO. 12 | S | +0.230 | +0.172 | NO. 12 |
| E | +0.413 | -0.134 | NO. 12 | T | +0.186 | -0.062 | NO. 12 |
| F | +0.370 | -0.336 | NO. 16 | U | +0.211 | -0.267 | NO. 16 |
| G | +0.230 | -0.441 | NO. 16 | V | +0.000 | -0.323 | NO. 16 |
| H | +0.000 | -0.495 | NO. 16 | W | -0.211 | -0.267 | NO. 16 |
| J | -0.230 | -0.441 | NO. 16 | X | -0.186 | -0.062 | NO. 12 |
| K | -0.370 | -0.336 | NO. 16 | Y | -0.230 | +0.172 | NO. 12 |
| L | -0.413 | -0.134 | NO. 16 | Z | +0.000 | +0.028 | NO. 16 |
| M | -0.461 | +0.100 | NO. 12 | a | +0.000 | -0.151 | NO. 16 |

PCB FOOTPRINTS

