




# SERIES 701 SeaKing™ Junior High-Density Dry-Mate Connectors



## Overmolded cables and pigtail assemblies

### SEAKING™ JUNIOR POINT-TO-POINT PLUG-TO-PLUG OVERMOLDED CABLE

SeaKing Junior - How To Order CCP Cable Assemblies							
<b>Sample Part Number</b>	<b>7071-0067</b>	<b>9-35</b>	<b>Z1</b>	<b>S</b>	<b>N</b>	<b>36</b>	
<b>Series</b>	7071-0067 = SeaKing Junior Cable Assembly						
<b>Insert Arrangement</b>	See insert arrangement tables pages 23–28						
<b>Material / Finish</b>	Z1 = Stainless Steel Body and Marine Bronze Coupling Nut TC = Titanium						
<b>Contact Style</b>	S = Socket						
<b>Polarization</b>	N = Normal, A, B, C (see Polarization Table, page 22)						
<b>Cable Length</b>	Length = in inches; ie 36 = 36 inches						

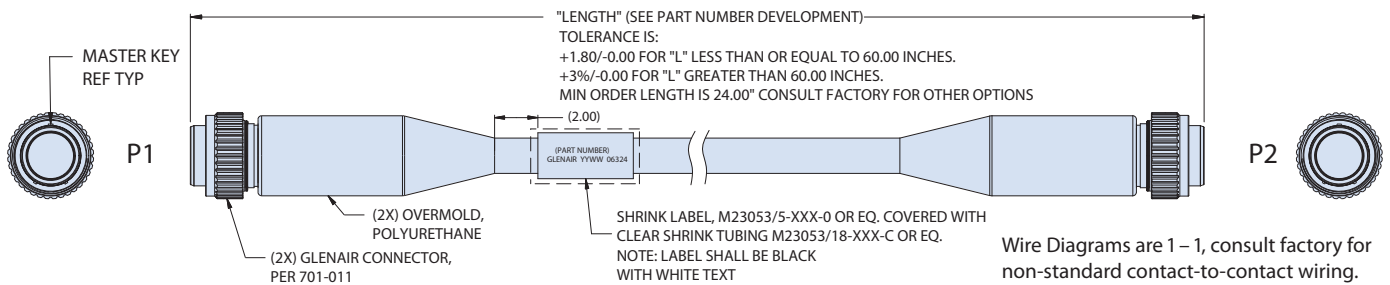

### SEAKING™ JUNIOR SINGLE-ENDED RECEPTACLE ASSEMBLY

SeaKing Junior - How To Order FCR and BCR Receptacle Assemblies							
<b>Sample Part Number</b>	<b>7071-0068</b>	<b>1</b>	<b>9-35</b>	<b>Z1</b>	<b>P</b>	<b>N</b>	<b>36</b>
<b>Series</b>	7071-0068 = SeaKing Junior Cable Assembly						
<b>Receptacle Style</b>	1 = Flange Connector Receptacle (701-016) 2 = Bulkhead Connector Receptacle (701-017)						
<b>Insert Arrangement</b>	See insert arrangement tables pages 23–28						
<b>Material / Finish</b>	Z1 = Stainless Steel Body and Marine Bronze Coupling Nut TC = Titanium						
<b>Contact Style</b>	P = Pin						
<b>Polarization</b>	N = Normal, A, B, C (see Polarization Table, page 22)						
<b>Cable Length</b>	Length = in inches; ie 36 = 36 inches						

